SOUTHERN FARMHOUSE

A DESIGN BY JAY OSBORNE


SYMBOLS LEGEND

- SECTION MARKER
- ELEVATION MARKER
- INTERIOR ELEVATION
- DETAIL CALLOUT
- COMPASS (TRUE N)
- DATUM MARKER
- WINDOW CALLOUT
- DOOR CALLOUT
- FIXTURE CALLOUT
- FINISH CALLOUT
- CONTOURS (2' [600])
- REVISION NUMBER
- CENTER LINE
- SOIL
- CONCRETE
- BRICK
- INSULATION (ANY)
- RIGID INSULATION
- BATT INSULATION
- WALL OUTLET
- SPECIAL-USE OUTLET
- 220V OUTLET
- ELECTRICAL SWITCH
- 3-WAY SWITCH
- LIGHT/FAN SWITCH
- CEILING LIGHT
- RECESSED LIGHT
- WALL-HUNG LIGHT
- CEILING FAN
- SMOKE DETECTOR


ABBREVIATIONS

#	POUNDS OR NUMBER	M	METERS
~	APPROXIMATELY	MAX	MAXIMUM
[ ]	METRIC UNITS (MM, U.O.N.)	MIN	MINIMUM
AC	AIR CONDITIONING	MM	MILLIMETERS
A.F.F.	ABOVE FINISH FLOOR	(N)	NEW
B.O.	BOTTOM OF	NTS	NOT TO SCALE
B/T	BETWEEN	O.C.	ON CENTER
BD	BOARD	OSB	ORIENTED STRAND BD
BM	BEAM	PERF	PERFORATED
CLG	CEILING	PT	PRESSURE-TREATED
CMU	CONC MASONRY UNIT	QTY	QUANTITY
C.O.	CASED OPENING	R	RADIUS OR RISER
CONC	CONCRETE	RCP	CEILING PLAN
CONT	CONTINUOUS	REF	REFRIGERATOR
D	DRYER	REQ'D	REQUIRED
DEMO	DEMOLISH	RM	ROOM
DH	DOUBLE HUNG	SD	SMOKE DETECTOR
DIA	DIAMETER	SF	SQUARE FEET
DIM	DIMENSION	SIM.	SIMILAR
DM	DIMMER	SPEC	SPECIFICATION
DN	DOWN	SYM	SYMMETRICAL
DW	DISHWASHER	T.O.	TOP OF
(E)	EXISTING	T&G	TONGUE & GROOVE
EL	ELEVATION	TYP	TYPICAL
ELEC	ELECTRICAL	U.O.N.	UNLESS OTHERWISE NOTED
EQ	EQUAL		
EXT	EXTERIOR	W	WASHER OR WATT
FIN	FINISH	W/	WITH
FT	FEET	W/D	WASHER & DRYER
GALV	GALVANIZED	W/O	WITHOUT
GFCI	CIRCUIT INTERUPTER	WC	WATER CLOSET
GYP	GYPSUM	WD	WOOD
IN	INCH(ES)	WH	WATER HEATER
INT	INTERIOR	WP	WATERPROOF
KG	KILOGRAMS	XPS	EXTRUDED POLY


PERSPECTIVE

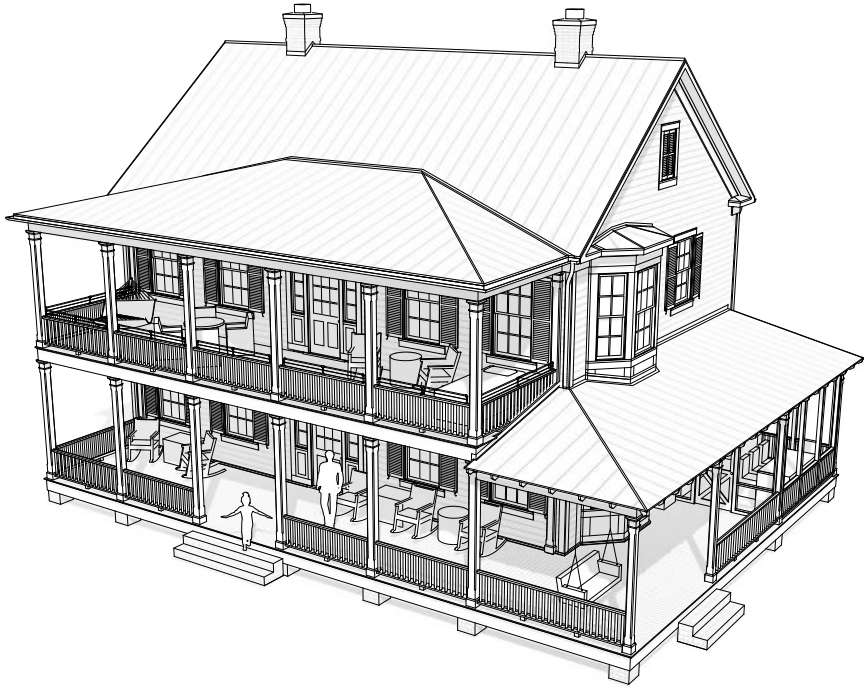

FIRST FLOOR

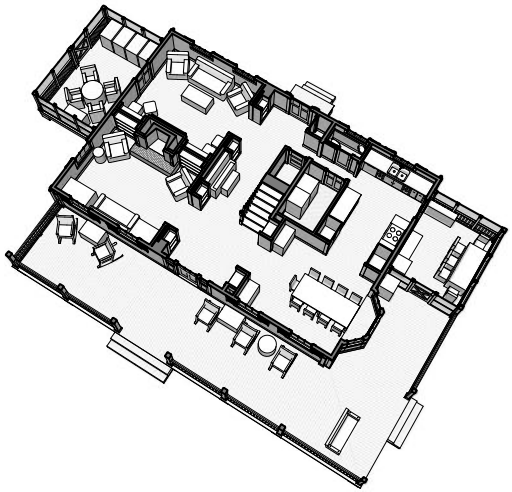

SECOND FLOOR

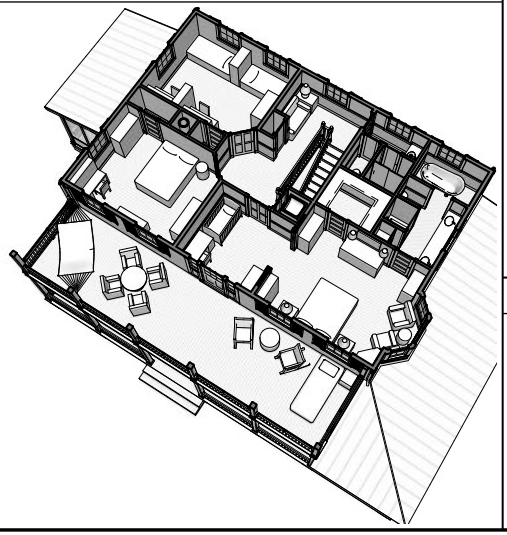

SHEET INDEX

A0.0 COVER PAGE
A0.1 PROJECT INFORMATION
A0.2 GENERAL NOTES

A1.0 FOUNDATION PLAN
A1.1 1ST FLOOR PLAN
A1.2 2ND FLOOR PLAN
A1.3 ROOF PLAN
A1.4 1ST RCP/ELECTRICAL
A1.5 2ND RCP/ELECTRICAL

A2.0 FRONT ELEVATION
A2.1 WEST ELEVATION
A2.2 NORTH ELEVATION
A2.3 EAST ELEVATION

A3.0 LONGITUDINAL SECTION
A3.1 TRANSVERSE SECTION

A4.0 DETAIL PLANS
A4.1 SHELVING ELEVATIONS
A4.2 KITCHEN ELEVATIONS
A4.3 BATH / WC ELEVATIONS
A4.4 ENSUITE BATH ELEVATIONS

A5.0 TYPICAL DETAILS
A5.1 EXTERIOR DETAILS
A5.2 INTERIOR DETAILS
A5.3 DOORS & WINDOWS

A6.0 SCHEDULES

PAGES FOR EXTENDED DESIGN
(NEW BEDROOM SUITE & MUD ROOM)

A0.3x EXTENDED DESIGN INTRO
A1.1x FLOOR 1 EXTENDED PLAN
A1.4x 1ST RCP/ELECTRICAL
A2.4x EXTENSION ELEVATIONS
A4.5x DOWNSTAIRS BATHROOM
A5.4x SIDE EXTENSION DETAILS

IMPORTANT NOTE

These drawings are for informational purposes only. This work is provided 'as is,' with no promises about accuracy or reliability. It does not represent a legal contract or an architectural service. No person or organization makes any warranty, express or implied, regarding the information provided. **Use this work at your own risk.** Buildings are complex, and many things can go wrong. FreeFarmhouse and Jay Osborne disclaim liability from any damages that may result from using these drawings.

01 FEB 2023 FIRST EDITION PRINT **SOUTHERN FARMHOUSE** JAY OSBORNE

OPEN-SOURCE ARCHITECTURAL DRAWINGS

You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.

For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

4 **2023-02-01** FIRST EDITION (COMPLETED BOOK)
3 **2022-11-30** KICKSTARTER EDITION (TEST PRINTS)
2 **2022-06-21** 1ST PUBLIC RELEASE (FILES ONLINE)
1 **2022-01-01** SCHEMATIC DESIGN PRESENTATION
+ For more project history and credits, see A0.1

COVER PAGE

A0.0

PROJECT INFORMATION

LOCATION
54321 RURAL ROUTE 2
GREENBOW, AL 39902

PROJECT DESCRIPTION
NEW SINGLE-FAMILY HOME

PROJECT NUMBER
APN 0000-0000-000-000

ZONING
R-3

FLOOR AREA
PROPOSED: 2330 SQUARE FEET (216 SQUARE METERS)

NEW BEDROOM SUITE & MUD ROOM: ADDS 300 SQ FT (28 SQ M)
EXTENDED DESIGN TOTAL AREA: 2630 SQUARE FEET (244 SQ M)

CONSTRUCTION TYPE
TYPE V - WOOD FRAME CONSTRUCTION

PARCEL SIZE
60,000 FT² [5400 M²]
1.37 ACRES [.54 HECTARES]

APPLICABLE CODES
2022 STATE BUILDING CODE
2018 LOCAL FIRE CODE

PROJECT HISTORY & CREDITS

APPROPRIATE ATTRIBUTION IS REQUIRED WHEN CUSTOMIZING OR COPYING THIS WORK. SEE **A0.2** NOTES FOR MORE INFORMATION

2023-02-01
4 FIRST EDITION (BOOK COMPLETED)
INCLUDES EXTENDED PLANS FOR AN OPTIONAL MUD ROOM AND AN OPTIONAL FIRST-FLOOR MAIN BEDROOM SUITE.

2022-11-30
3 KICKSTARTER EDITION (DRAFT PRINTS)
THANK YOU TO ALL MY KICKSTARTER SUPPORTERS! NOW COMES WITH MORE DETAILS PAGES, RENDERINGS, AND EXPLANATIONS.


2022-06-21
2 FIRST PUBLIC RELEASE (FILES SHARED ONLINE)
DESIGN DOCUMENTS ARE SUBSTANTIALLY COMPLETE. DETAILS PAGES REMAIN TO BE COMPLETED WHEN TIME ALLOWS.

2022-01-01
1 SCHEMATIC DESIGN AND RENDERINGS
JAY OSBORNE. SKETCHUP & LAYOUT ARE USED FOR EVERYTHING.

FALL 2019
0 INITIAL MODELING, DESIGN TESTING, RESEARCH
JAY OSBORNE, FLOOR PLANS & ELEVATIONS MOSTLY COMPLETE


1994
– ARTISTIC INSPIRATION
THE HOUSE IN THE MOVIE FORREST GUMP WASN'T REAL, BUT JUST AS IT WAS INSPIRED BY OLD SOUTHERN HOUSES, IT INSPIRED ME.

PRESENTATION PLANS

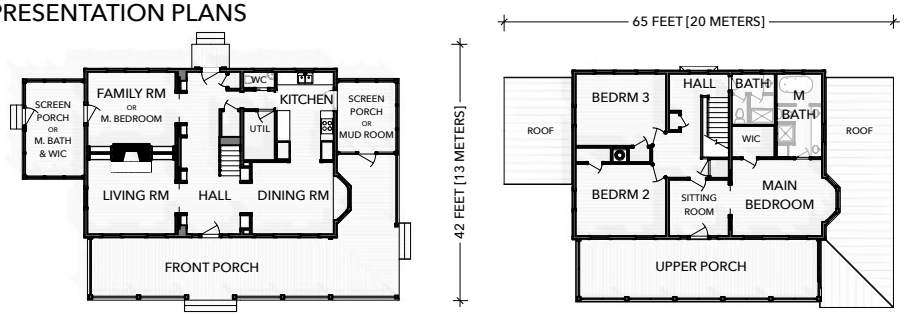

FIRST FLOOR
INDOOR AREA: 1190 FT² [110 M²]
PORCH AREA: 960 FT² [90 M²]

SECOND FLOOR
INDOOR AREA: 1140 FT² [106 M²]
PORCH AREA: 410² [38 M²]

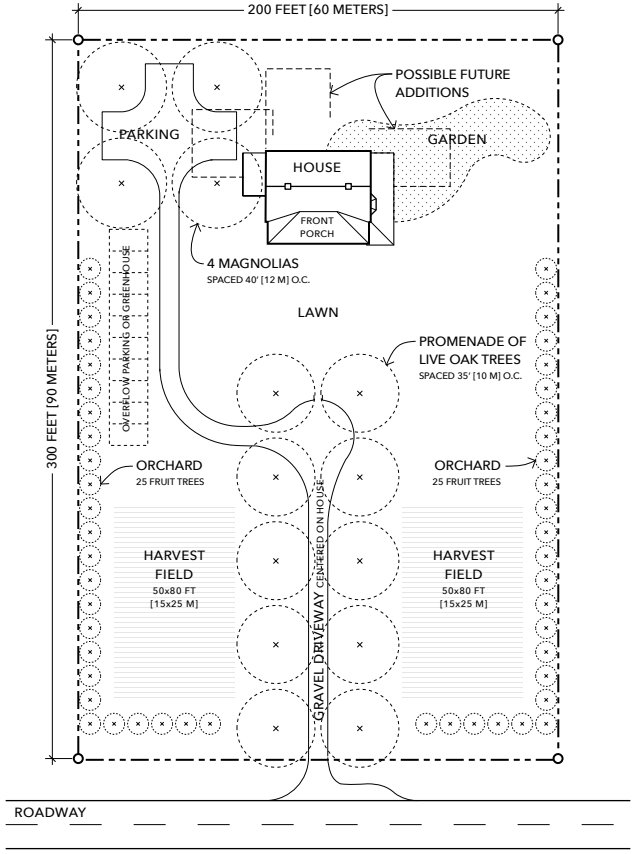

① SITE SAMPLE (A MODEST PLOT OF LAND, THE SIZE OF A FOOTBALL FIELD)
SCALE: 1" = 40' [~1:500]

CONTACT INFORMATION

OWNER
NAME
PHONE NUMBER — STREET ADDRESS
EMAIL ADDRESS — CITY / STATE / ZIP
NOTES

ARCHITECT (OR DESIGNER OF RECORD)
CONTACT PERSON — COMPANY NAME
PHONE NUMBER — STREET ADDRESS
EMAIL ADDRESS — CITY / STATE / ZIP
NOTES

GENERAL CONTRACTOR
CONTACT PERSON — COMPANY NAME
PHONE NUMBER — STREET ADDRESS
EMAIL ADDRESS — CITY / STATE / ZIP
NOTES

SURVEYOR
CONTACT PERSON — COMPANY NAME
PHONE NUMBER — STREET ADDRESS
EMAIL ADDRESS — CITY / STATE / ZIP
NOTES

PLUMBING
CONTACT PERSON — COMPANY NAME
PHONE NUMBER — STREET ADDRESS
EMAIL ADDRESS — CITY / STATE / ZIP
NOTES

MECHANICAL (AND/OR ELECTRICAL)
CONTACT PERSON — COMPANY NAME
PHONE NUMBER — STREET ADDRESS
EMAIL ADDRESS — CITY / STATE / ZIP
NOTES

STRUCTURAL
CONTACT PERSON — COMPANY NAME
PHONE NUMBER — STREET ADDRESS
EMAIL ADDRESS — CITY / STATE / ZIP
NOTES

LANDSCAPE
CONTACT PERSON — COMPANY NAME
PHONE NUMBER — STREET ADDRESS
EMAIL ADDRESS — CITY / STATE / ZIP
NOTES

INTERIORS
CONTACT PERSON — COMPANY NAME
PHONE NUMBER — STREET ADDRESS
EMAIL ADDRESS — CITY / STATE / ZIP
NOTES

OPEN-SOURCE ARCHITECTURAL DRAWINGS
You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.
For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE
SOUTHERN FARMHOUSE
FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4 **2023-02-01** FIRST EDITION (COMPLETED BOOK)
3 **2022-11-30** KICKSTARTER EDITION (TEST PRINTS)
2 **2022-06-21** 1ST PUBLIC RELEASE (FILES ONLINE)
1 **2022-01-01** SCHEMATIC DESIGN PRESENTATION
+ For more project history and credits, see A0.1

PROJECT INFO

A0.1

GENERAL NOTES

1A – WORK SHALL CONFORM TO ALL APPLICABLE CODES AND ORDINANCES, INCLUDING BUT NOT LIMITED TO BUILDING, PLUMBING, ELECTRICAL, AND MECHANICAL CODES.

1B – ANY ERRORS, OMISSIONS, OR CONFLICTS FOUND IN THESE DRAWINGS SHALL BE BROUGHT TO THE ATTENTION OF THE OWNER OR THEIR REPRESENTATIVE BEFORE PROCEEDING WITH THE WORK.

1C – IF PRINTING FULL-SIZE DRAWING SET, DO NOT SCALE DRAWINGS.

1D – WRITTEN DIMENSIONS TAKE PRECEDENCE OVER MEASUREMENTS.

1E – METRIC DIMENSIONS DO NOT PRECISELY MATCH IMPERIAL DIMS (AS DRAWN) DUE TO DIFFERING CODES AND MODULAR STANDARDS. IF ACCURACY IS DOUBTED, IMPERIAL DIMENSIONS TAKE PRECEDENCE.

1F – DIMENSIONS ARE TAKEN FROM FACE OF FRAMING LUMBER, FACE OF CONCRETE/ MASONRY, CENTER OF COLUMN, AND CENTERLINE OF FIXTURE, UNLESS OTHERWISE NOTED.

1G – ALL DIMENSIONS NOTED "VERIFY IN FIELD" (V.I.F.) SHALL BE MEASURED BY THE CONTRACTOR PRIOR TO CONSTRUCTION. REPORT ANY DISCREPANCIES TO THE OWNER OR THEIR REPRESENTATIVE.

1H – ALL NOTES AND DETAILS ARE TYPICAL. SIMILAR NOTES AND DETAILS APPLY IN SIMILAR SITUATIONS.

1I – IN THE CASE OF DISCREPANCIES WITHIN DESCRIPTIONS OF SIMILAR ITEMS, PRECEDENCE SHALL BE GIVEN TO NOTES AND DRAWINGS OF GREATER DETAIL.

1J – INSTALL FIXTURES, MATERIALS, AND EQUIPMENT ACCORDING TO MANUFACTURERS' SPECIFICATIONS. SHOULD THOSE SPECS CONFLICT WITH THE DRAWINGS, OR VIOLATE LOCAL REGULATIONS, IMMEDIATELY NOTIFY THE OWNER OR THEIR REPRESENTATIVE.

1K – VERIFY CLEARANCES FOR FIXTURES, VENTS, CHASES, ETC. BEFORE ORDERING OR INSTALLING RELATED WORK ITEMS.

1L – COORDINATE ALL WORK WITH EXISTING CONDITIONS, INCLUDING BUT NOT LIMITED TO: IRRIGATION PIPES, ELECTRICAL CONDUITS, WATER LINES, GAS LINES, AND DRAINAGE LINES.

1M – IT IS BEYOND THE SCOPE OF ARCHITECTURAL DRAWINGS TO ILLUSTRATE THE BUILDING CODE. BUILDERS: READ IT, FOLLOW IT.

2 (SITE / FOUNDATION)

2A – ANY SURVEY MARKERS WITHIN THE AREA OF CONSTRUCTION SHALL BE PRESERVED OR RESET BY A REGISTERED CIVIL ENGINEER OR LICENSED LAND SURVEYOR.

2B – GRADING AND SITEWORK SHALL BE MINIMAL IN ALL AREAS NOT DIRECTLY AFFECTED BY THE NEW CONSTRUCTION. FOLLOW BEST PRACTICES AND LOCAL REQUIREMENTS IN ORDER TO MINIMIZE ENVIRONMENTAL DAMAGE.

2C – FINISH GRADE SHALL SLOPE DOWN FROM HOUSE, AT A HEIGHT OF 6 INCHES [150] OVER A 10 FOOT [3000] DISTANCE.

2D – BEFORE GRADING OPERATIONS, A TEMPORARY PROTECTION FENCE SHALL BE CONSTRUCTED AROUND ANY TREE WITHIN 30 FEET [9000] OF THE FOUNDATION. SILT FENCES SHALL BE CONSTRUCTED DOWNSLOPE OF ANY AREA WHERE THE SOIL IS DISTURBED.

2E – DEPICTED FOUNDATION IS BASED ON FICTIONAL CONDITIONS. CONDUCT A SOIL TEST AND STRUCTURAL ENGINEERING FOR A SITE-SPECIFIC FOUNDATION. (AND THEN YOU CAN DELETE THIS NOTE)

2F – FOOTINGS SHALL EXTEND BELOW THE LOCAL FROST LINE.

2G – PERFORATED DRAINAGE PIPES SHALL BE LOCATED WITHIN A GRAVEL PERIMETER AROUND THE FOUNDATION; AND MULTIPLE DRAINAGE OUTLETS LEAD DOWNSLOPE AWAY FROM THE BUILDING.

2H – ALL WOOD WITHIN 8 INCHES [200 MM] OF THE GROUND SHALL BE PRESSURE TREATED OR COMPRISE A SUITABLY ROT RESISTANT MATERIAL. METAL CONNECTIONS WHICH TOUCH THIS WOOD SHOULD BE GALVANIZED OR STAINLESS STEEL.

3 (CONSTRUCTION)

3A – ALL CONSTRUCTION SHALL BE TRUE, PLUMB, LEVEL, SQUARE, AND IN PROPER ALIGNMENT.

3B –THE GENERAL CONTRACTOR SHALL MAINTAIN A CURRENT AND COMPLETE SET OF DRAWINGS ON THE JOB SITE DURING ALL PHASES OF CONSTRUCTION. ALL SUBCONTRACTORS SHALL BE PROVIDED WITH A SET OF DRAWINGS.

3C – THE GENERAL CONTRACTOR SHALL VERIFY AND ASSUME RESPONSIBILITY FOR ALL DIMENSIONS AND SITE CONDITIONS, AS WELL AS INSPECT THE PREMISES AND TAKE NOTE OF EXISTING CONDITIONS PRIOR TO SUBMITTING PRICES. NO CLAIM SHALL BE ALLOWED FOR PROBLEMS WHICH COULD HAVE BEEN PREVENTED BY A THOROUGH EXAMINATION.

3A – PROVIDE TEMPORARY SUPPORT AS NECESSARY TO ENSURE THE STRUCTURAL INTEGRITY OF THE BUILDING UNDER CONSTRUCTION. THE GENERAL CONTRACTOR IS RESPONSIBLE FOR ALL CONSTRUCTION-RELATED ACTIVITIES.

3D – THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR REGULARLY REMOVING THE WASTE MATERIALS OF ALL SUBCONTRACTORS, AND MAINTAIN STRICT CONTROL OVER JOB CLEANING TO PREVENT DUST AND RUBBISH FROM INTERFERING WITH OPERATIONS.

3E – CONSTRUCTION EQUIPMENT NOISE SHALL BE MINIMIZED DURING THE CONSTRUCTION PHASES BY MUFFLING AND SHIELDING IMPACT TOOLS WHENEVER POSSIBLE.

3F – IF THE WORK OF ANY CONTRACTOR SIGNIFICANTLY DEVIATES FROM THE CONTRACT DRAWINGS WITHOUT THEM FIRST GETTING PERMISSION FROM THE APPROPRIATE PERSON, THAT CONTRACTOR MAY BE REQUIRED TO FIX THEIR WORK AT THEIR OWN EXPENSE.

4 (UTILITIES)

4A – ANY ELECTRICAL, PLUMBING AND/OR HVAC SYSTEMS INCLUDED IN THE WORK SHALL BE INSTALLED ON A DESIGN-BUILD BASIS, AND SHALL NOT SIGNIFICANTLY ALTER THE STRUCTURE OR FINISHES.

5 (WEATHERPROOFING)

5A – CHECK LOCAL CODES FOR INSULATION REQUIREMENTS.

5B – DEPICTED WEATHERPROOFING METHODS (SUCH AS SEALANT, CAULKING, AND FLASHING) ARE NOT COMPREHENSIVE. FOLLOW REQUIREMENTS AND RECOMMENDATIONS OF BUILDING CODES, PRODUCT MANUFACTURERS, AND CONSTRUCTION BEST PRACTICES.

6 (EGRESS / FIRE SAFETY)

6A – FIRE BLOCKING AND FIRE-RATED SHEATHING SHALL BE PROVIDED AS REQUIRED AT CEILINGS, FLOORS, AND ENCLOSED USABLE SPACE UNDER STAIRS.

6B – SMOKE DETECTORS AND CARBON MONOXIDE DETECTORS SHALL BE INSTALLED PER APPLICABLE CODES.

6C – ALL GLASS SHALL CONFORM WITH HUMAN IMPACT AND SAFETY REQUIREMENTS.

6D – ALL REQUIRED EXITS SHALL BE OPERABLE FROM THE INSIDE, WITHOUT THE USE OF A KEY OR ANY SPECIAL KNOWLEDGE.

6E – THE MINIMUM STAIRCASE TREAD SHALL BE 10" [254] AND THE MINIMUM RISER 7.75" [196], WITH A MAXIMUM 3/8" [9.5] VARIATION WITHIN A FLIGHT.

6F – HANDRAILS SHALL BE LOCATED 34-38 INCHES [864-965 MM] ABOVE STAIR TREADS AS MEASURED FROM THE NOSINGS.

6G – GUARDRAILS MUST BE LOCATED ALONG ANY EDGE WHERE THE FLOOR DROPS 30" [762] OR MORE TO THE FLOOR OR GROUND BELOW.

7 (FINISHES & FIXTURES)

7A – PROVIDE ADEQUATE BLOCKING AROUND CABINETRY, PLUMBING FIXTURES, AND OTHER APPLICABLE AREAS.

7B – CONTRACTOR MUST ENSURE THE INTERIOR SHEATHING IS FLUSH, CLEAN AND FREE OF DUST AND DEFECTS BEFORE APPLICATION OF PAINT COATINGS

7C – FLOOR MATERIAL TRANSITIONS OCCUR AT THE CENTERLINE OF DOORS OR FRAMED OPENINGS.

7D – PROVIDE AT LEAST 1 COAT PRIMER AND 2 FINISH COATS OF PAINT AT INTERIOR AND EXTERIOR SURFACES.

7E – DO NOT USE SCREW-ON, NON-OPERABLE WINDOW SHUTTERS. THEY ARE AS TACKY AS CLIP-ON TIES.

7F – AN ECONOMICAL ALTERNATIVE TO LOUVERED SHUTTERS: BOARD & BATTEN SHUTTERS. BUT DO **NOT** USE SCREW-ON, NON-OPERABLE SHUTTERS. (IT WOULD BE BETTER TO USE NONE AT ALL.)

7G – DO NOT USE VINYL OR ALUMINUM SIDING. THAT WOULD MAKE THIS HOUSE LOOK LIKE A CHEAP PLASTIC TOY. IT SHALL NOT BE DONE.

7H – SCREEN PORCHES MAY BECOME FUTURE ADDITIONS TO THE CONDITIONED SPACE (AS A MUDROOM, BATHROOM TO A BEDROOM SUITE, ETC). BUILD THEM WITH THAT IN MIND.

7I – WALL-TO-WALL CARPETING IS FORBIDDEN.

9 (CONDITIONS OF USE)

9A – JAY OSBORNE IS THE ORIGINAL DESIGNER OF THIS WORK. INSTEAD OF A CONVENTIONAL COPYRIGHT, HE PROVIDES THESE PLANS UNDER AN OPEN SOURCE LICENSE. SOME RIGHTS RESERVED.

9B – THIS WORK IS PROVIDED UNDER A CREATIVE COMMONS ATTRIBUTION SHARE-ALIKE LICENSE. FOR MORE INFORMATION, SEE WWW.CREATIVECOMMONS.ORG/LICENSES/BY-SA/4.0.

9C – YOU MAY COPY, SHARE, AND MODIFY THIS WORK,

9D – IF YOU USE OR SHARE THIS DESIGN, PROVIDE APPROPRIATE CREDIT TO JAY OSBORNE, AND DO NOT COPYRIGHT HIS WORK.

9E – THIS WORK SHALL NOT BE CONSIDERED A LEGAL DOCUMENT, OR PROFESSIONAL ADVICE, UNLESS IT IS STAMPED OR SIGNED BY A LICENSED PROFESSIONAL (IN THE RELEVANT JURISDICTION) WHO ASSUMES RESPONSIBILITY FOR IT, INCLUDING ANY NECESSARY CHANGES.

9F – ARCHITECTS, BUILDERS, AND OTHER DESIGN PROFESSIONALS MAY PROFIT FROM USING THIS WORK.

9G – IF YOU USE THIS WORK AND/OR CREATE ANY DERIVATIONS, YOU AGREE TO PROVIDE APPROPRIATE CREDIT TO JAY OSBORNE. ATTRIBUTION IS AN ESSENTIAL REQUIREMENT OF THE LICENSE.

9H – APPROPRIATE CREDIT INCLUDES MENTIONING JAY OSBORNE IS THE ORIGINAL DESIGNER. SPECIFY THAT WHERE AND WHEN IT WOULD BE IMPORTANT FOR SOMEBODY. (IF THEY WOULD FEEL DECEIVED WHEN LEARNING THE TRUTH, THEN YOU DID IT WRONG.) ALSO MENTION ANY CHANGES YOU MADE, IF APPLICABLE– BUT DON'T IMPLY JAY OSBORNE HAD ENDORSED THEM.


9I – THESE DRAWINGS ARE DERIVED FROM SKETCHUP MODELS, WHICH CAN BE DOWNLOADED FOR FREE ONLINE.

9J – IT IS IMPOSSIBLE FOR ONE SET OF ARCHITECTURAL DRAWINGS TO FULFILL THE REQUIREMENTS OF EVERY JURISDICTION. THIS IS A TEMPLATE TO START FROM. THE GC, DESIGNER OF RECORD (OR WHOEVER REMOVES THIS NOTE) SHALL TAKE RESPONSIBILITY FOR ADAPTING THIS DESIGN TO LOCAL REQUIREMENTS.

9K – USE THIS WORK AT YOUR OWN RISK. THIS DESIGN IS PROVIDED "AS IS" WITH NO GUARANTEES OR WARRANTIES, EXPRESS OR IMPLIED, INCLUDING (BUT NOT LIMITED TO) THE WARRANTIES OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL JAY OSBORNE OR FREEFARMHOUSE BE HELD LIABLE FOR ANY CLAIM, DAMAGES, OR OTHER LIABILITY (WHETHER IN AN ACTION OF CONTRACT, TORT, OR OTHERWISE) ARISING FROM, OUT OF, OR IN CONNECTION WITH THIS WORK (OR THE USE, OR OTHER DEALINGS IN THIS DESIGN). IN SHORT: BE RESPONSIBLE.

OPEN-SOURCE ARCHITECTURAL DRAWINGS
You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.
For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

4 **2023-02-01** FIRST EDITION (COMPLETED BOOK)
3 **2022-11-30** KICKSTARTER EDITION (TEST PRINTS)
2 **2022-06-21** 1ST PUBLIC RELEASE (FILES ONLINE)
1 **2022-01-01** SCHEMATIC DESIGN PRESENTATION
+ For more project history and credits, see A0.1

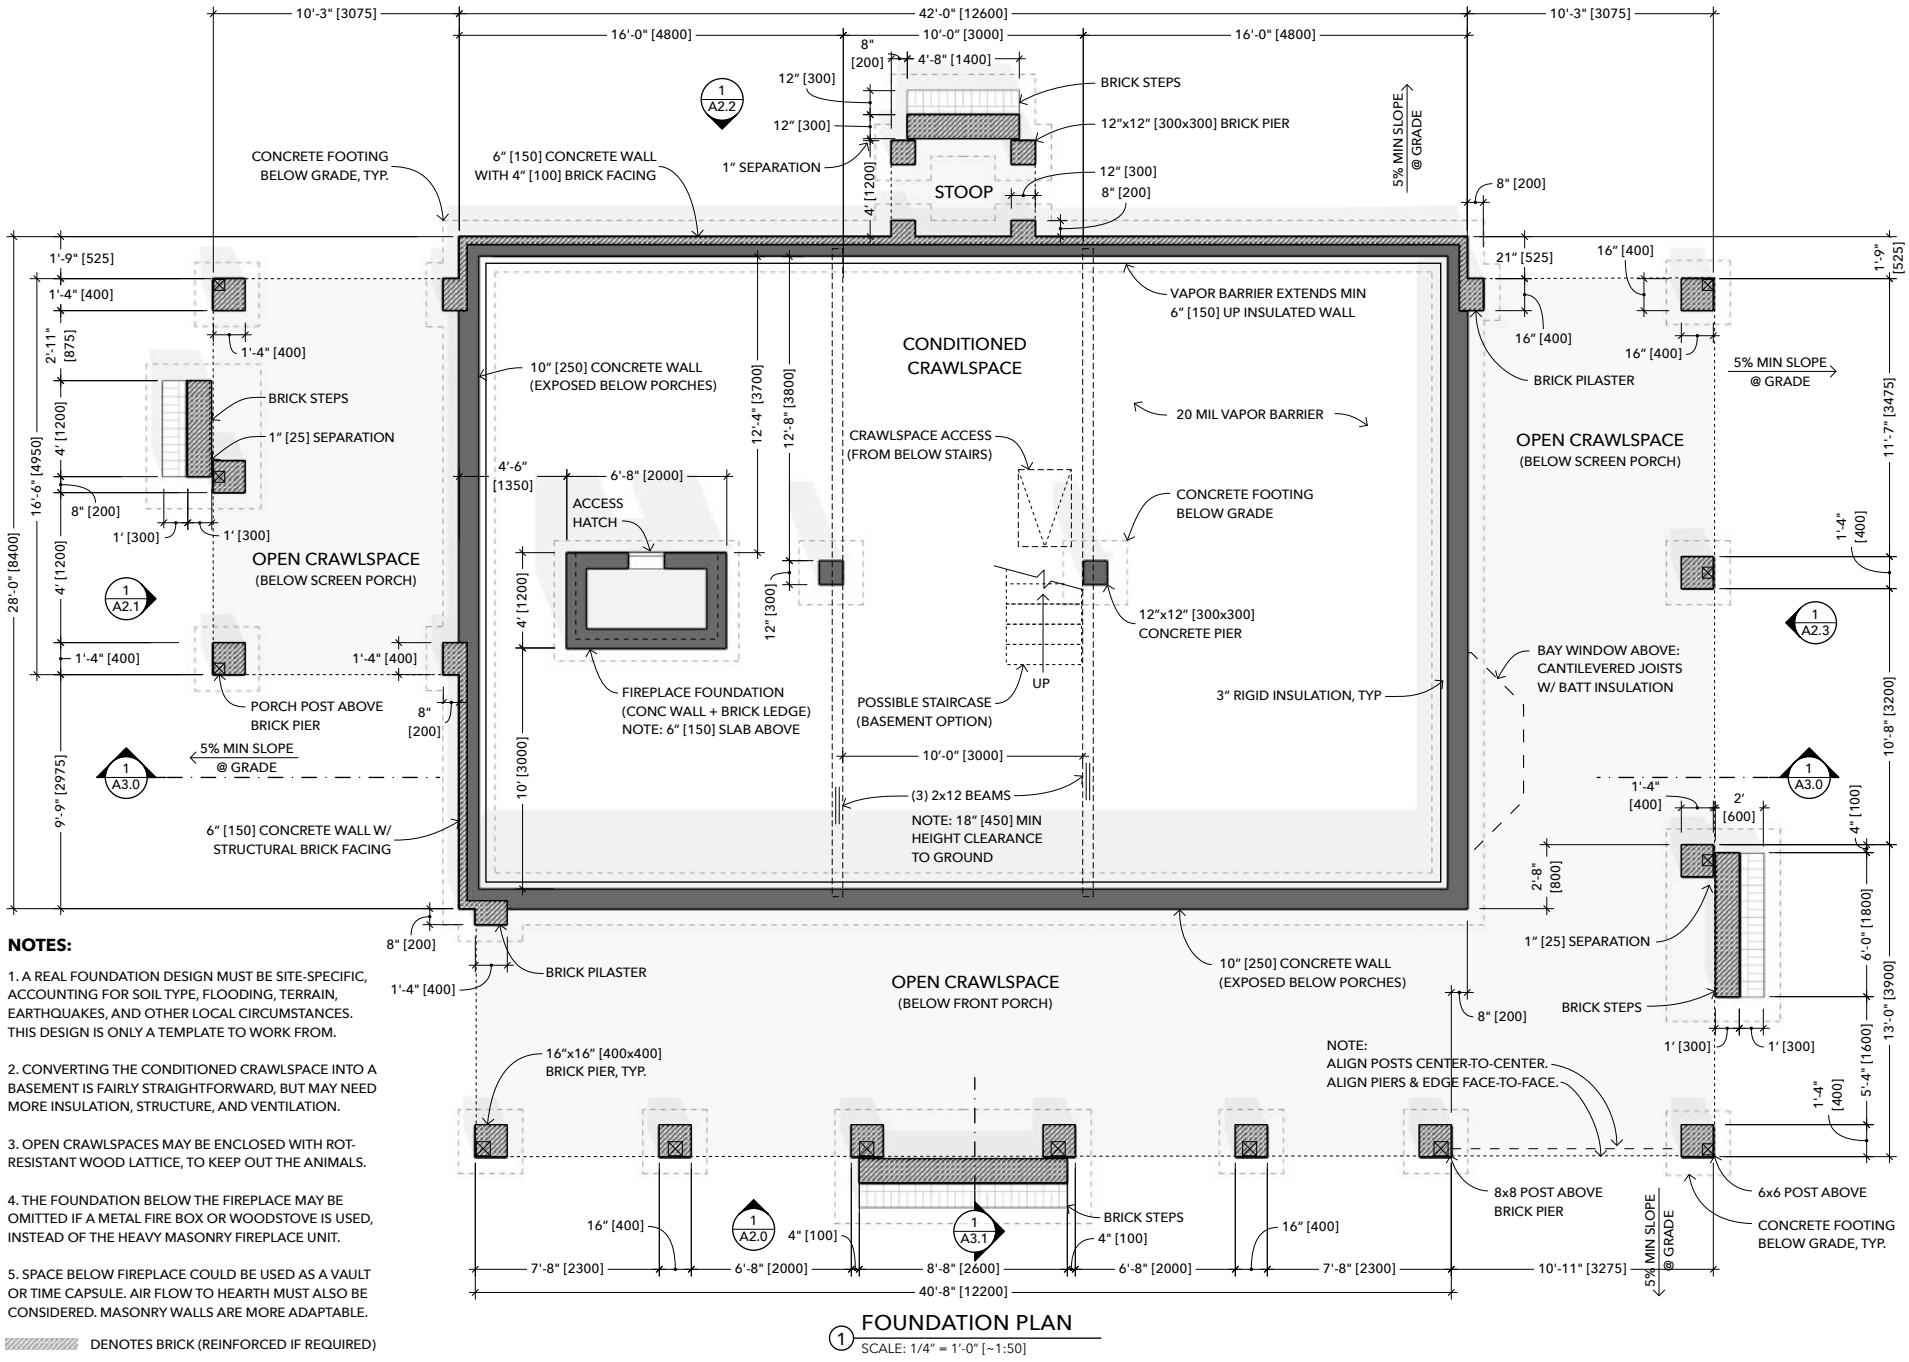

NOTES:

1. A REAL FOUNDATION DESIGN MUST BE SITE-SPECIFIC, ACCOUNTING FOR SOIL TYPE, FLOODING, TERRAIN, EARTHQUAKES, AND OTHER LOCAL CIRCUMSTANCES. THIS DESIGN IS ONLY A TEMPLATE TO WORK FROM.

2. CONVERTING THE CONDITIONED CRAWLSPACE INTO A BASEMENT IS FAIRLY STRAIGHTFORWARD, BUT MAY NEED MORE INSULATION, STRUCTURE, AND VENTILATION.

3. OPEN CRAWLSPACES MAY BE ENCLOSED WITH ROT-RESISTANT WOOD LATTICE, TO KEEP OUT THE ANIMALS.

4. THE FOUNDATION BELOW THE FIREPLACE MAY BE OMITTED IF A METAL FIRE BOX OR WOODSTOVE IS USED, INSTEAD OF THE HEAVY MASONRY FIREPLACE UNIT.

5. SPACE BELOW FIREPLACE COULD BE USED AS A VAULT OR TIME CAPSULE. AIR FLOW TO HEARTH MUST ALSO BE CONSIDERED. MASONRY WALLS ARE MORE ADAPTABLE.

DENOTES BRICK (REINFORCED IF REQUIRED)

1 FOUNDATION PLAN

SCALE: 1/4" = 1'-0" [~1:50]

OPEN-SOURCE ARCHITECTURAL DRAWINGS

You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.

For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE

SOUTHERN FARMHOUSE

FREE FILES AVAILABLE AT FREEFARMHOUSE.COM


4	**2023-02-01**	FIRST EDITION (COMPLETED BOOK)
3	**2022-11-30**	KICKSTARTER EDITION (TEST PRINTS)
2	**2022-06-21**	1ST PUBLIC RELEASE (FILES ONLINE)
1	**2022-01-01**	SCHEMATIC DESIGN PRESENTATION
+	For more project history and credits, see A0.1	

FOUNDATION

A1.0

DOORS

- (A) 36x80 [900x2000] 9-LITE DOOR & 36x16 [900x400] TRANSOM
- (B) 36x80 [900x2000] 6-PANEL DOOR & 36x16 [900x400] TRANSOM
- (D) 32x80 [800x2000] 6-PANEL DOOR
- (E) 28x80 [700x2000] 5-PANEL DOOR
- (F) 24x80 [600x2000] 1-PANEL DOOR (OPTIONAL: LOUVERS)
- (G) 24x80 [600x2000] 1-PANEL POCKET DOOR
- (H) 60x80 [1500x2000] 5-PANEL POCKET DRS & 60x18 [1500x450] TR
- (I) 36x80 [900x2000] SCREEN DOOR

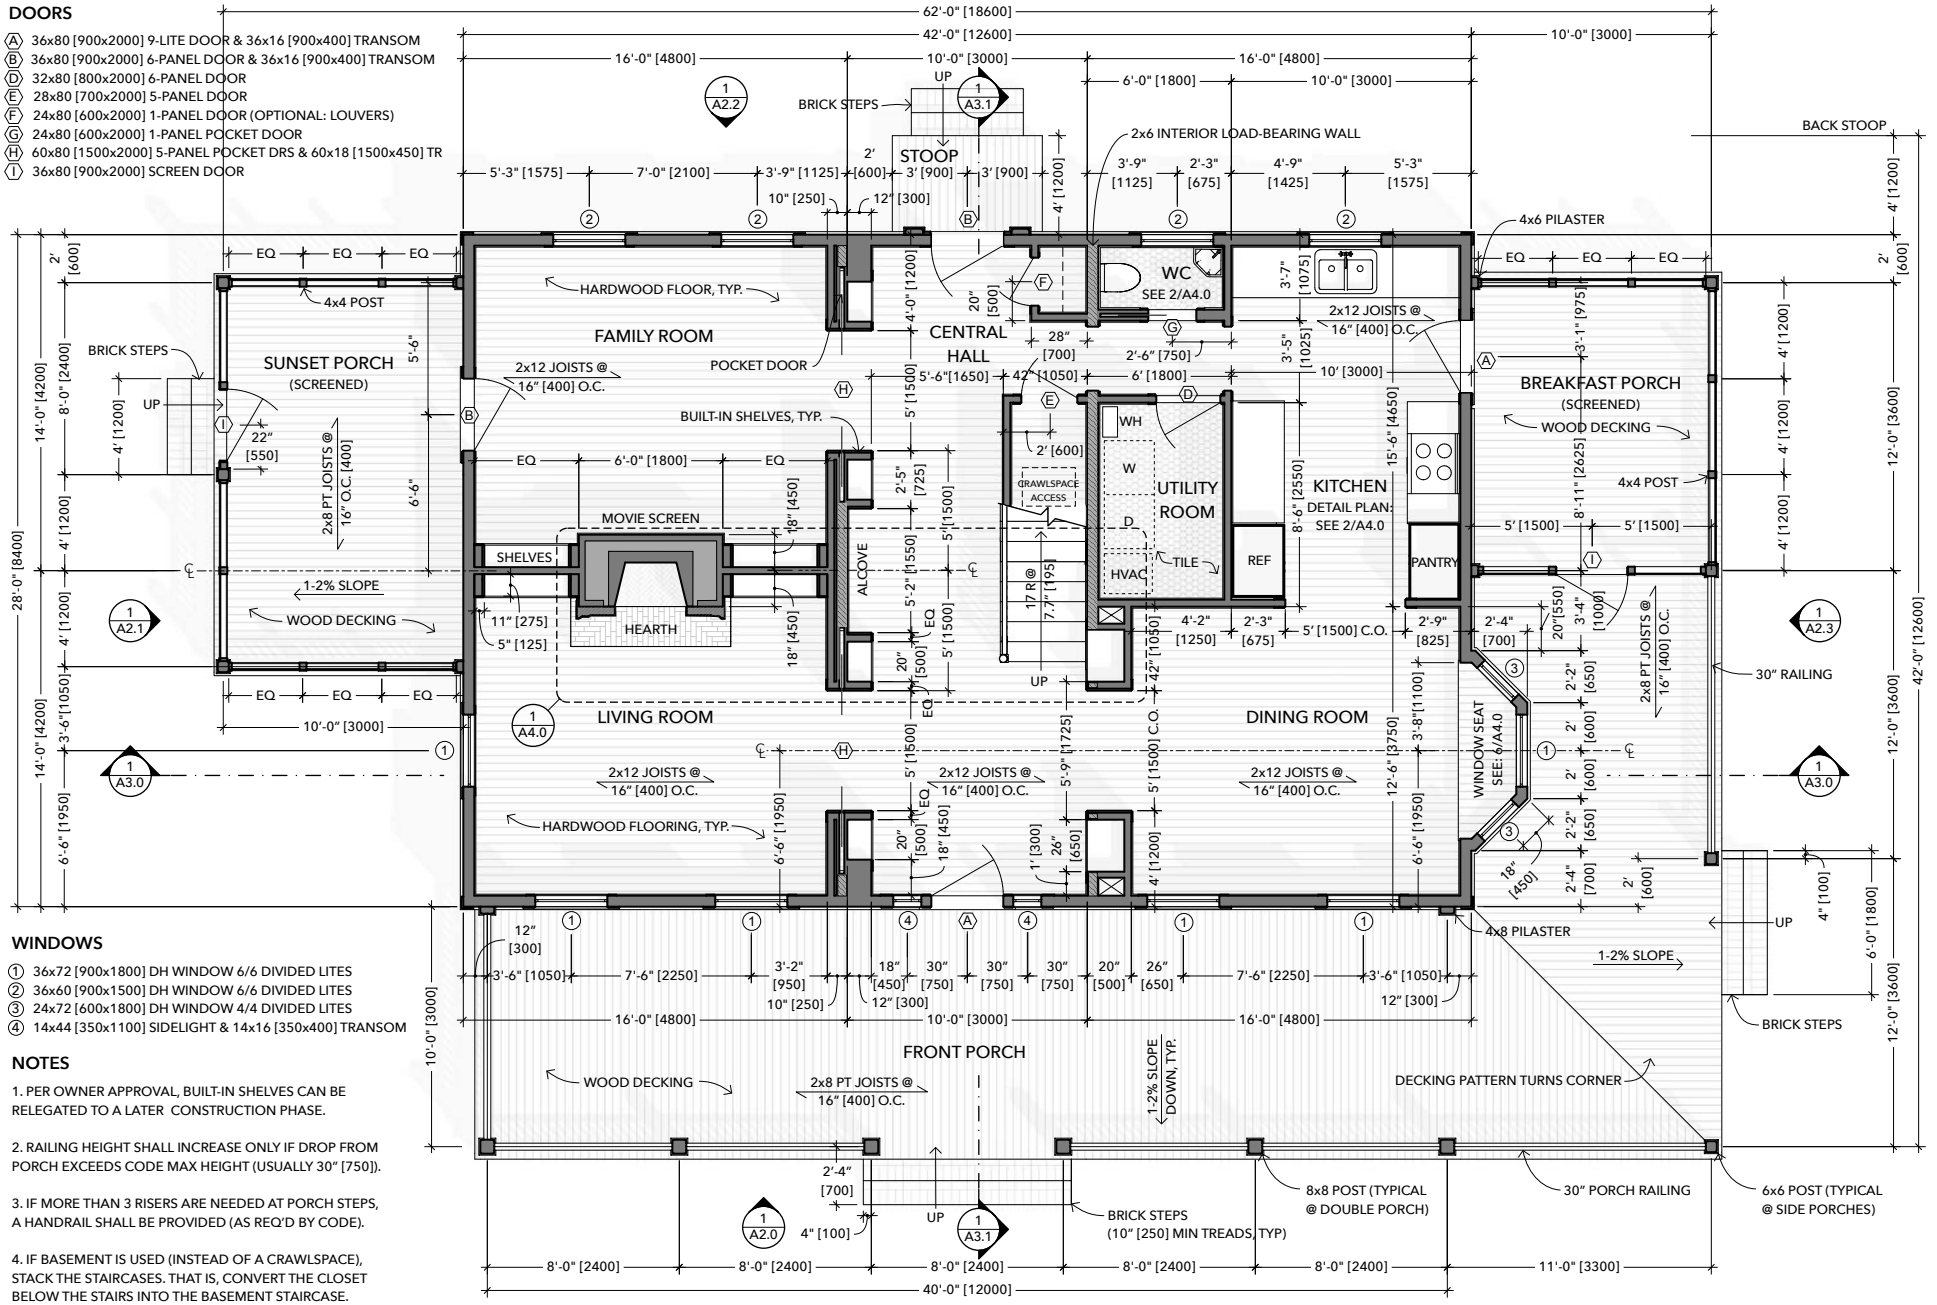

WINDOWS

- (1) 36x72 [900x1800] DH WINDOW 6/6 DIVIDED LITES
- (2) 36x60 [900x1500] DH WINDOW 6/6 DIVIDED LITES
- (3) 24x72 [600x1800] DH WINDOW 4/4 DIVIDED LITES
- (4) 14x44 [350x1100] SIDELIGHT & 14x16 [350x400] TRANSOM

NOTES

1. PER OWNER APPROVAL, BUILT-IN SHELVES CAN BE RELEGATED TO A LATER CONSTRUCTION PHASE.

2. RAILING HEIGHT SHALL INCREASE ONLY IF DROP FROM PORCH EXCEEDS CODE MAX HEIGHT (USUALLY 30" [750]).

3. IF MORE THAN 3 RISERS ARE NEEDED AT PORCH STEPS, A HANDRAIL SHALL BE PROVIDED (AS REQ'D BY CODE).

4. IF BASEMENT IS USED (INSTEAD OF A CRAWLSPACE), STACK THE STAIRCASES. THAT IS, CONVERT THE CLOSET BELOW THE STAIRS INTO THE BASEMENT STAIRCASE.

DENOTES LOAD-BEARING INTERIOR WALLS

1 1ST FLOOR PLAN

SCALE: 1/4" = 1'-0" [~1:50]

OPEN-SOURCE ARCHITECTURAL DRAWINGS

You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.

For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE

SOUTHERN FARMHOUSE

FREE FILES AVAILABLE AT FREEFARMHOUSE.COM


4	**2023-02-01**	FIRST EDITION (COMPLETED BOOK)
3	**2022-11-30**	KICKSTARTER EDITION (TEST PRINTS)
2	**2022-06-21**	1ST PUBLIC RELEASE (FILES ONLINE)
1	**2022-01-01**	SCHEMATIC DESIGN PRESENTATION
+	For more project history and credits, see A0.1	

1ST FLOOR PLAN

A1.1

DOORS

- (A) 36x80 [900x2000] 9-LITE DOOR & 36x16 [900x400] TRANSOM
- (C) 32x80 [800x2000] 6-PANEL DOOR & 32x16 [800x400] TRANSOM
- (D) 32x80 [800x2000] 6-PANEL DOOR
- (E) 28x80 [700x2000] 5-PANEL DOOR
- (F) 24x80 [600x2000] 1-PANEL DOOR (OPTIONAL: LOUVERS)
- (H) 60x80 [1500x2000] 5-PANEL POCKET DRS & 60x14 [1500x350] TR

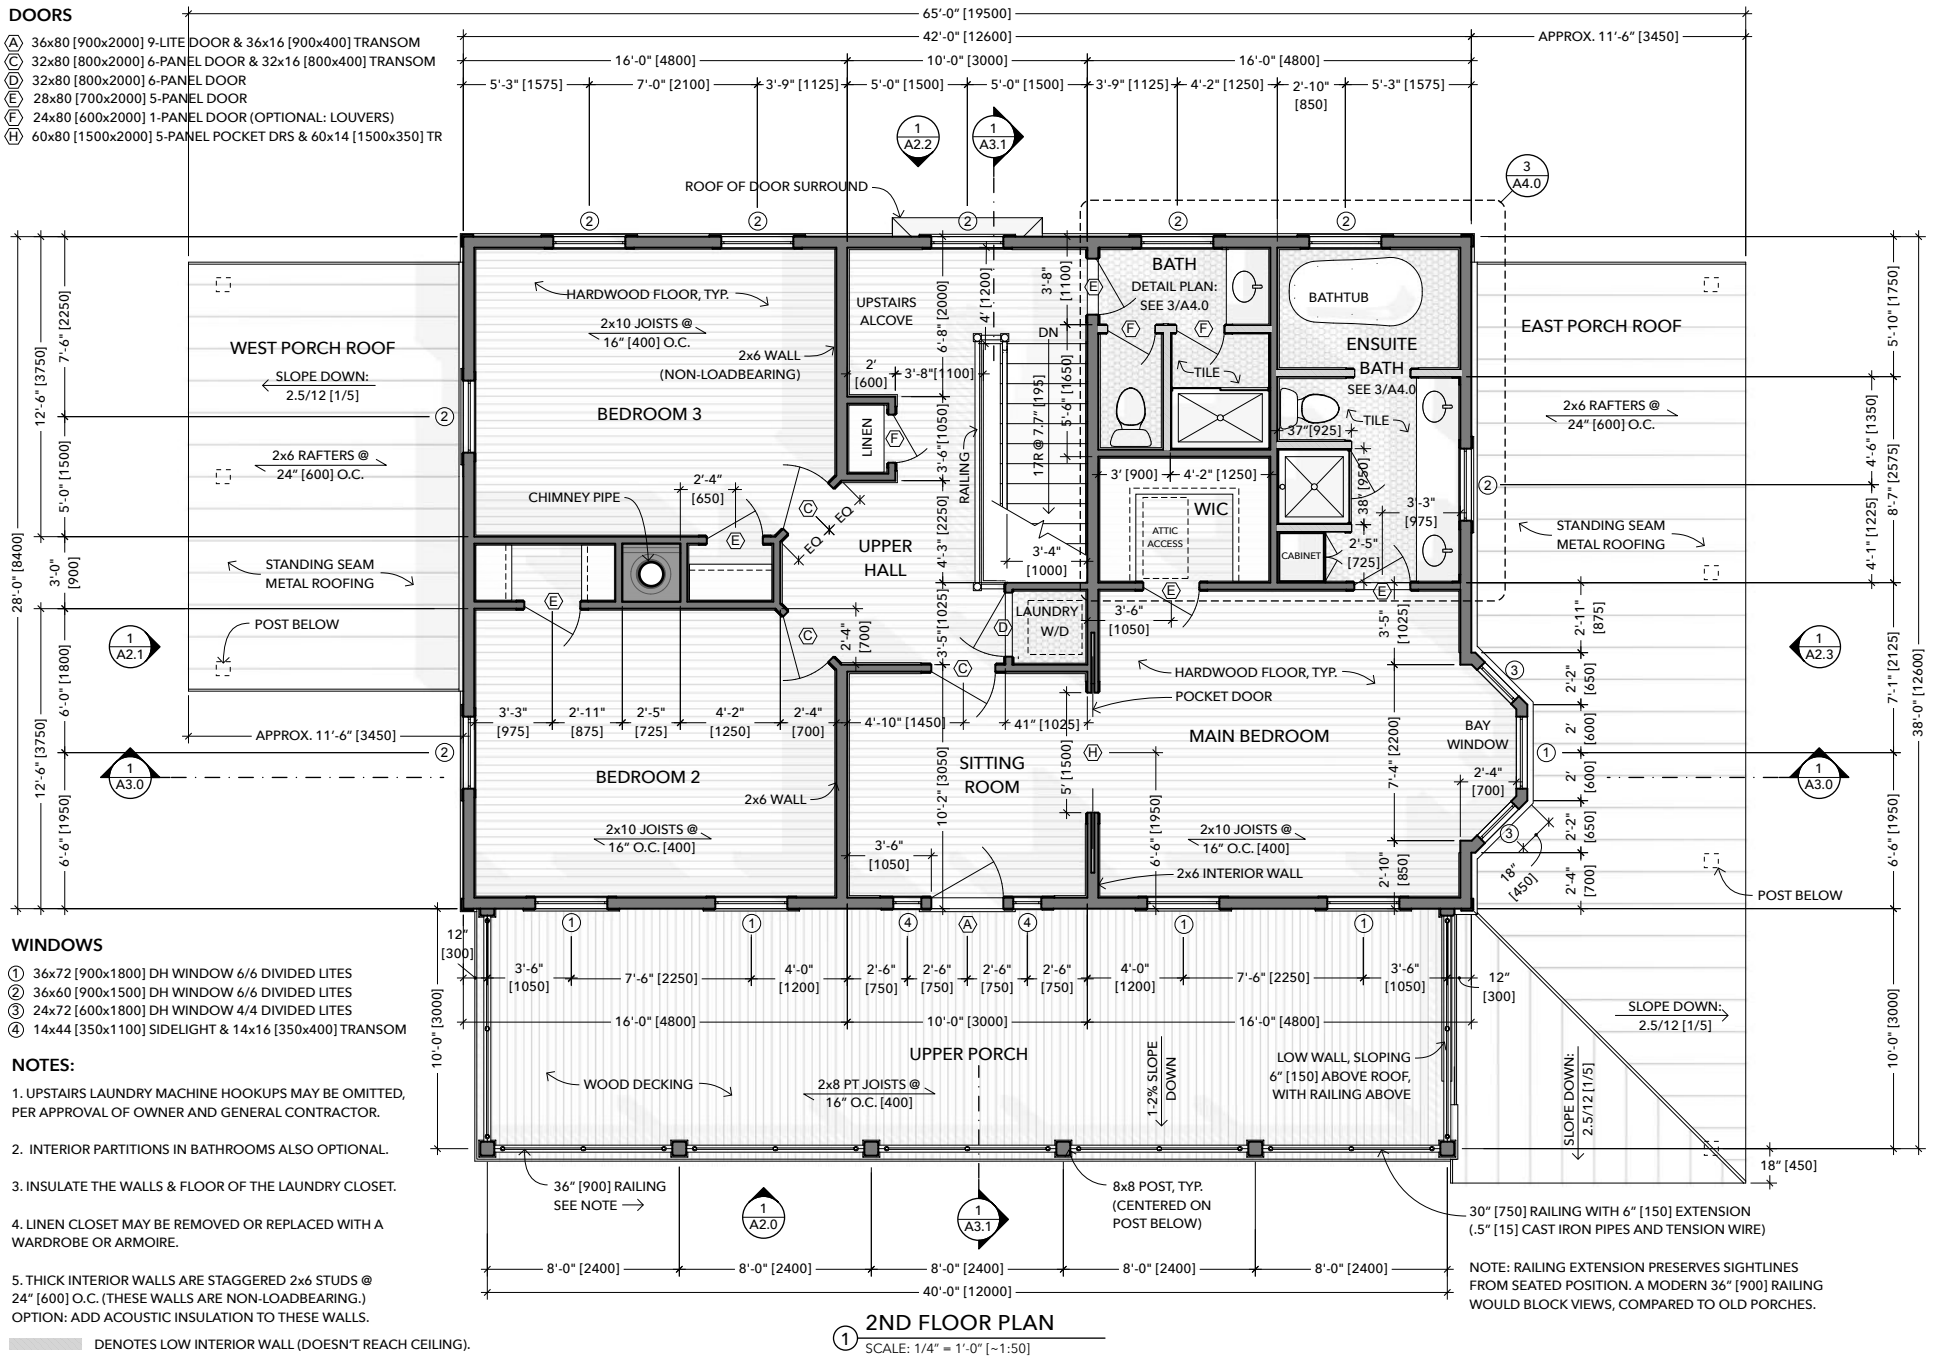

WINDOWS

- (1) 36x72 [900x1800] DH WINDOW 6/6 DIVIDED LITES
- (2) 36x60 [900x1500] DH WINDOW 6/6 DIVIDED LITES
- (3) 24x72 [600x1800] DH WINDOW 4/4 DIVIDED LITES
- (4) 14x44 [350x1100] SIDELIGHT & 14x16 [350x400] TRANSOM

NOTES:

1. UPSTAIRS LAUNDRY MACHINE HOOKUPS MAY BE OMITTED, PER APPROVAL OF OWNER AND GENERAL CONTRACTOR.

2. INTERIOR PARTITIONS IN BATHROOMS ALSO OPTIONAL.

3. INSULATE THE WALLS & FLOOR OF THE LAUNDRY CLOSET.

4. LINEN CLOSET MAY BE REMOVED OR REPLACED WITH A WARDROBE OR ARMOIRE.

5. THICK INTERIOR WALLS ARE STAGGERED 2x6 STUDS @ 24" [600] O.C. (THESE WALLS ARE NON-LOADBEARING.) OPTION: ADD ACOUSTIC INSULATION TO THESE WALLS.

DENOTES LOW INTERIOR WALL (DOESN'T REACH CEILING).

NOTE: RAILING EXTENSION PRESERVES SIGHTLINES FROM SEATED POSITION. A MODERN 36" [900] RAILING WOULD BLOCK VIEWS, COMPARED TO OLD PORCHES.

1 2ND FLOOR PLAN

SCALE: 1/4" = 1'-0" [~1:50]

OPEN-SOURCE ARCHITECTURAL DRAWINGS

You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.

For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE

SOUTHERN FARMHOUSE


FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	2023-02-01	FIRST EDITION (COMPLETED BOOK)
3	2022-11-30	KICKSTARTER EDITION (TEST PRINTS)
2	2022-06-21	1ST PUBLIC RELEASE (FILES ONLINE)
1	2022-01-01	SCHEMATIC DESIGN PRESENTATION

+ For more project history and credits, see A0.1

2ND FLOOR PLAN

A1.2

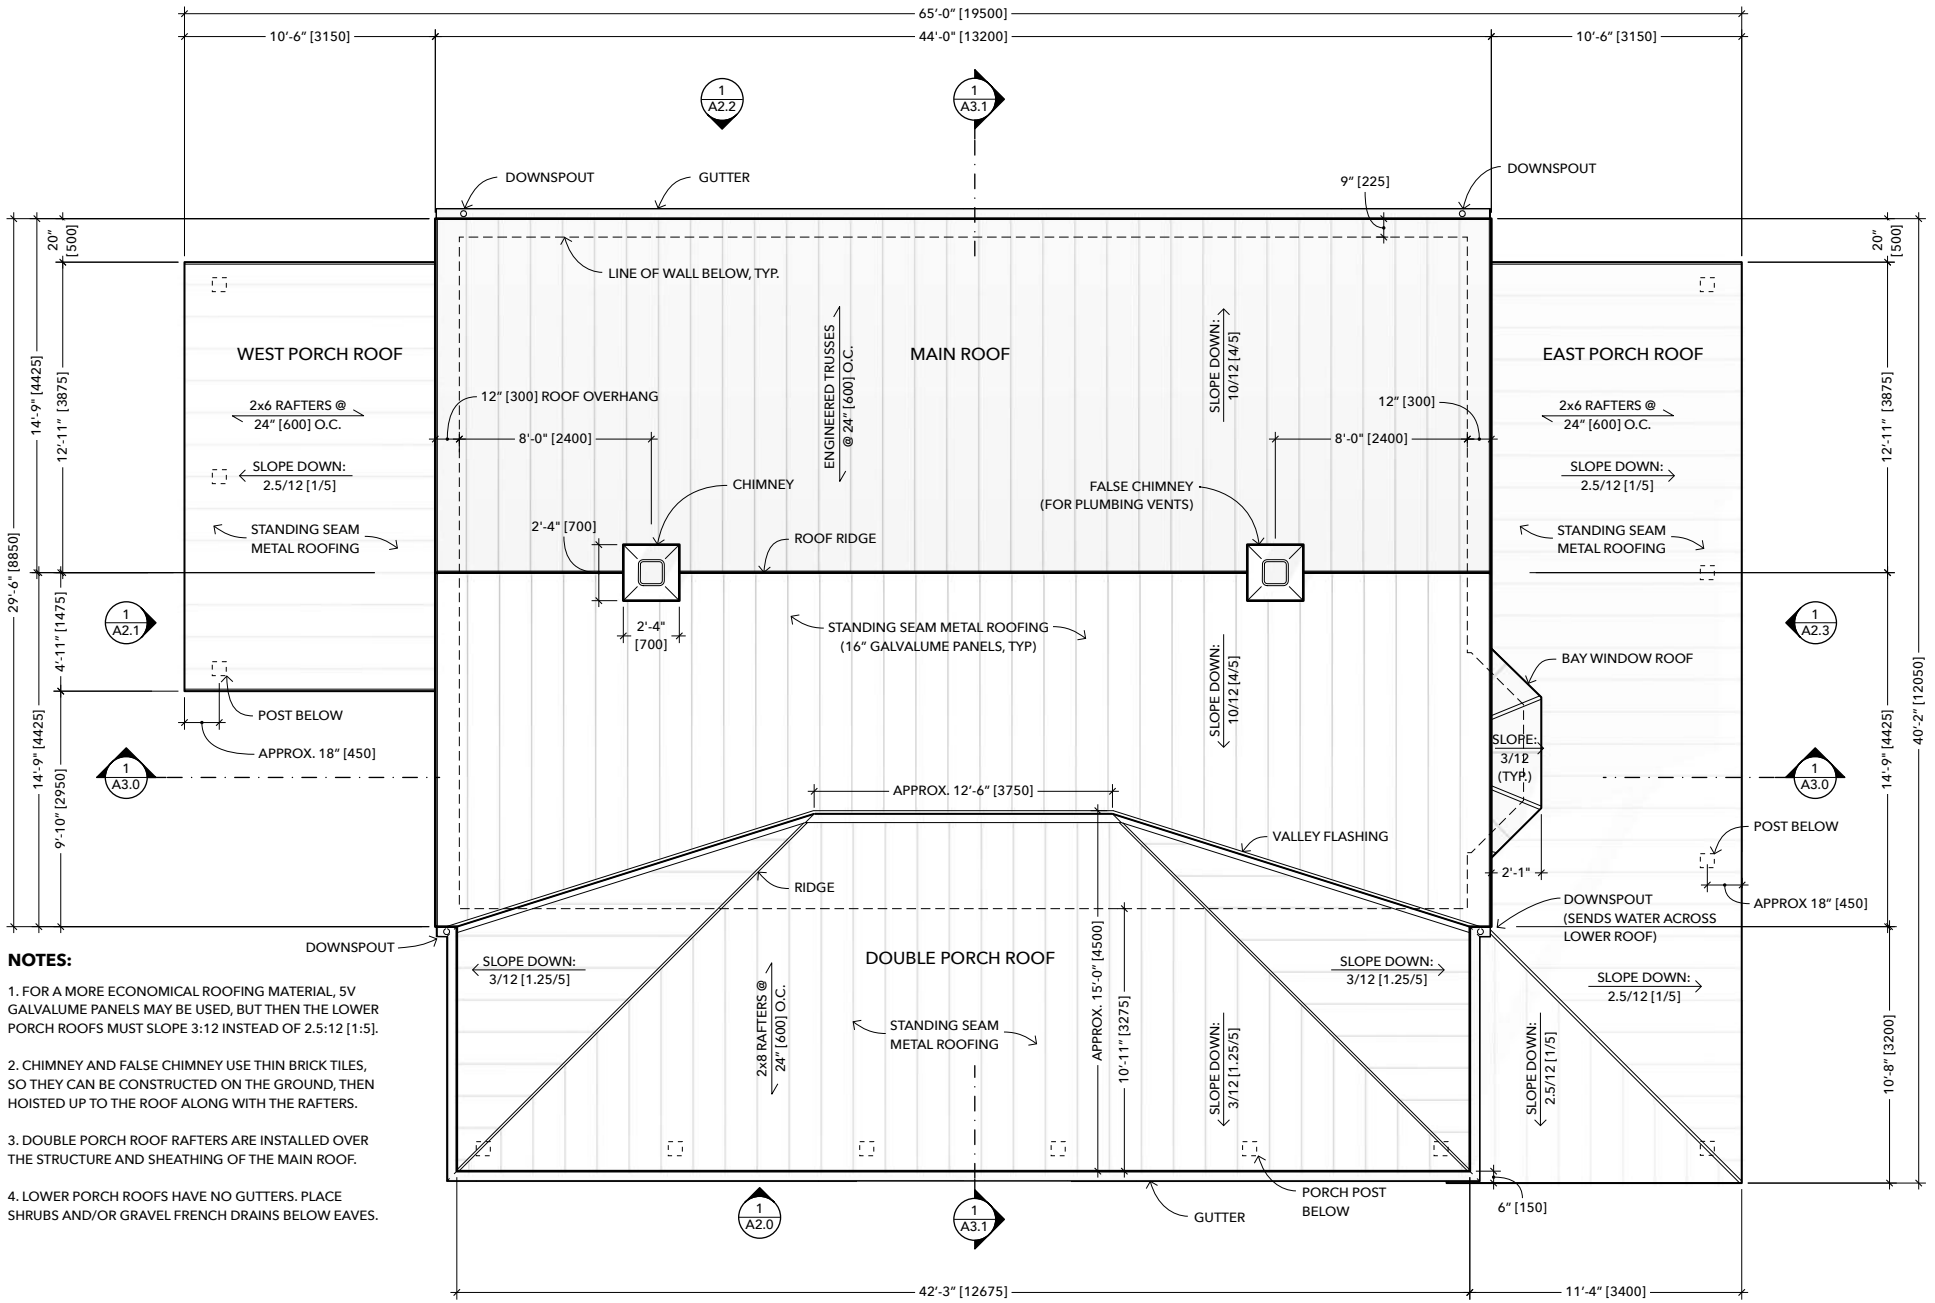

1 ROOF PLAN
SCALE: 1/4" = 1'-0" [~1:50]

NOTES:

1. FOR A MORE ECONOMICAL ROOFING MATERIAL, 5V GALVALUME PANELS MAY BE USED, BUT THEN THE LOWER PORCH ROOFS MUST SLOPE 3:12 INSTEAD OF 2.5:12 [1:5].

2. CHIMNEY AND FALSE CHIMNEY USE THIN BRICK TILES, SO THEY CAN BE CONSTRUCTED ON THE GROUND, THEN HOISTED UP TO THE ROOF ALONG WITH THE RAFTERS.

3. DOUBLE PORCH ROOF RAFTERS ARE INSTALLED OVER THE STRUCTURE AND SHEATHING OF THE MAIN ROOF.

4. LOWER PORCH ROOFS HAVE NO GUTTERS. PLACE SHRUBS AND/OR GRAVEL FRENCH DRAINS BELOW EAVES.

OPEN-SOURCE ARCHITECTURAL DRAWINGS
You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.
For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE


SOUTHERN FARMHOUSE

FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	**2023-02-01**	FIRST EDITION (COMPLETED BOOK)
3	**2022-11-30**	KICKSTARTER EDITION (TEST PRINTS)
2	**2022-06-21**	1ST PUBLIC RELEASE (FILES ONLINE)
1	**2022-01-01**	SCHEMATIC DESIGN PRESENTATION
+	For more project history and credits, see A0.1	

ROOF PLAN

A1.3

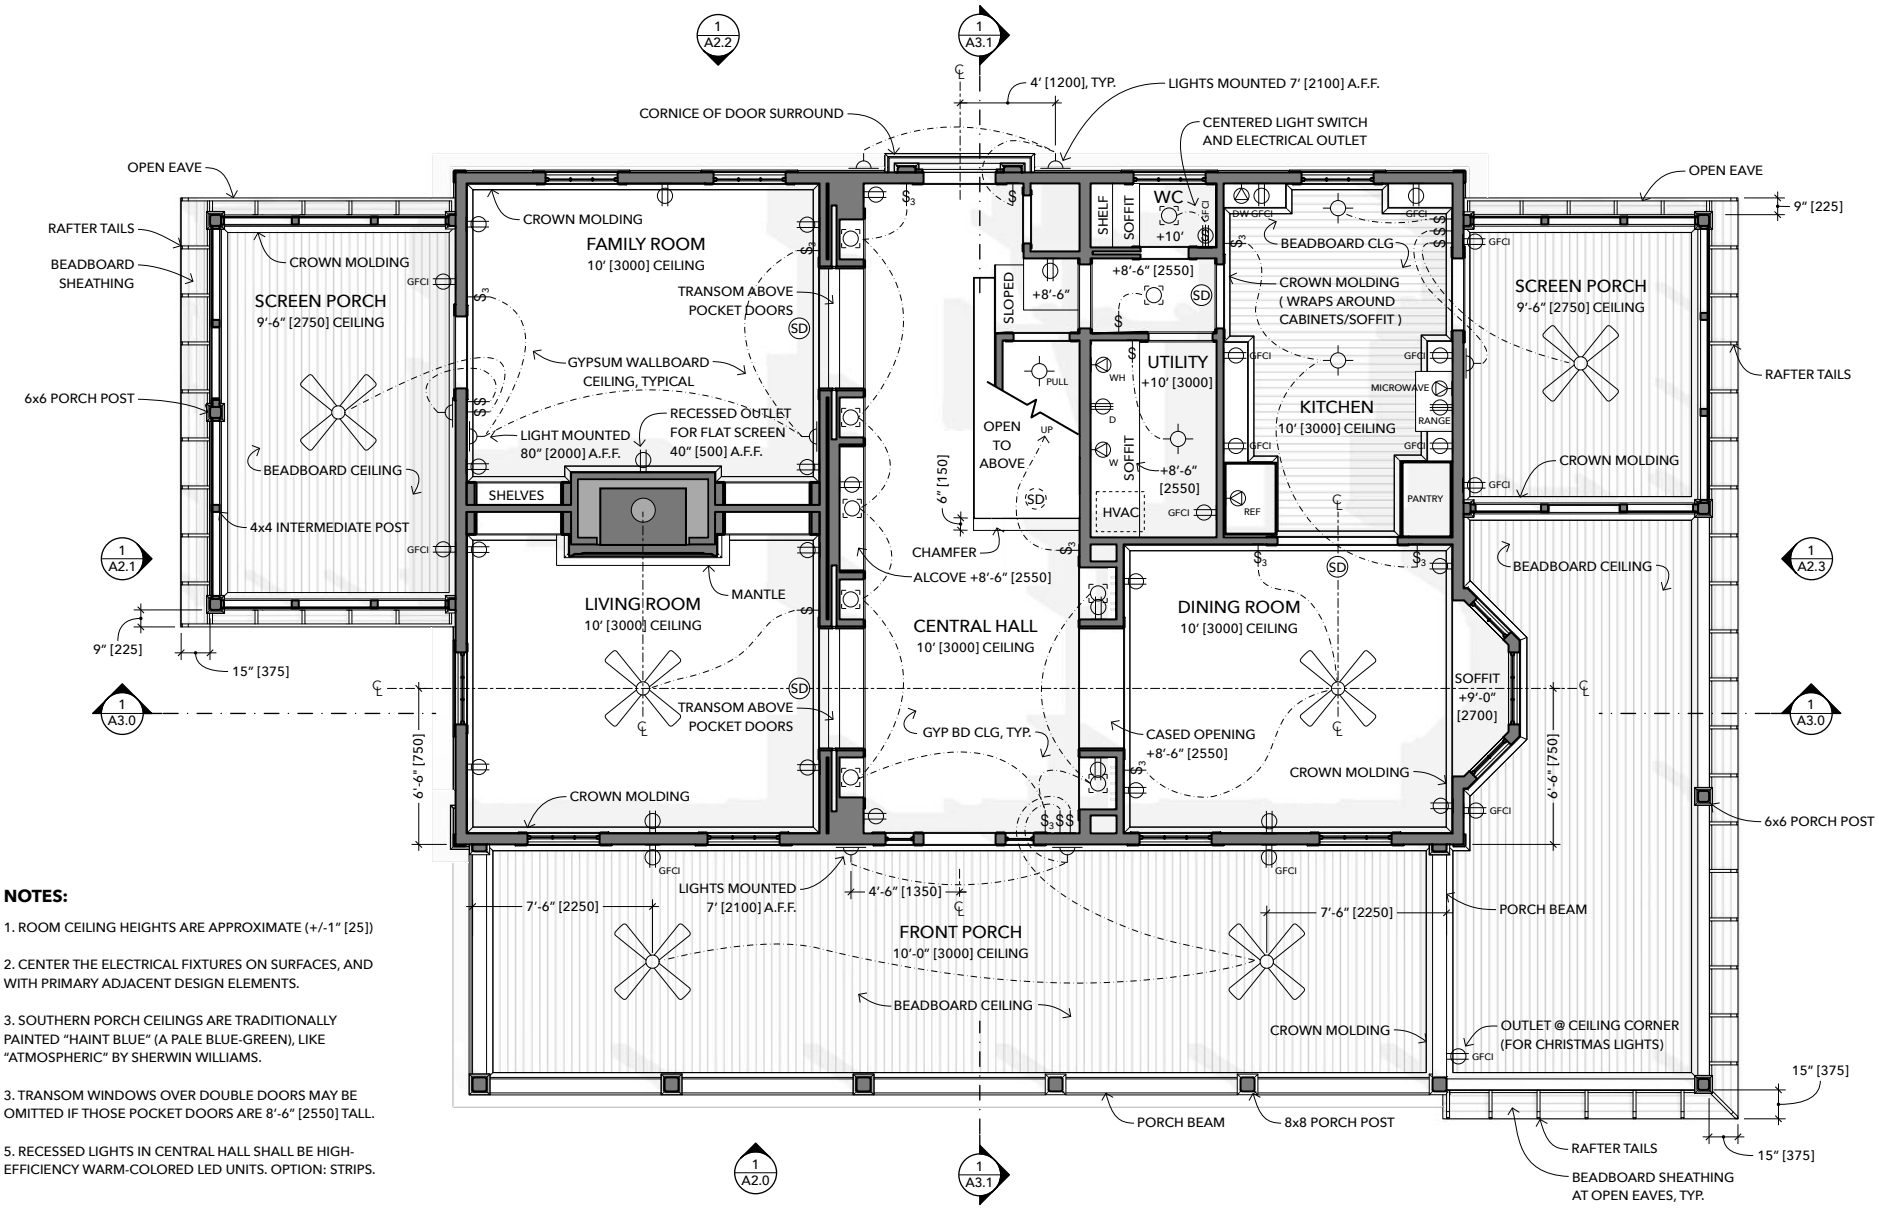

NOTES:

1. ROOM CEILING HEIGHTS ARE APPROXIMATE (+/-1″ [25])

2. CENTER THE ELECTRICAL FIXTURES ON SURFACES, AND WITH PRIMARY ADJACENT DESIGN ELEMENTS.

3. SOUTHERN PORCH CEILINGS ARE TRADITIONALLY PAINTED "HAINT BLUE" (A PALE BLUE-GREEN), LIKE "ATMOSPHERIC" BY SHERWIN WILLIAMS.

3. TRANSOM WINDOWS OVER DOUBLE DOORS MAY BE OMITTED IF THOSE POCKET DOORS ARE 8′-6″ [2550] TALL.

5. RECESSED LIGHTS IN CENTRAL HALL SHALL BE HIGH-EFFICIENCY WARM-COLORED LED UNITS. OPTION: STRIPS.

1 1ST LEVEL - REFLECTED CEILING PLAN / ELECTRICAL PLAN

SCALE: 1/4″ = 1′-0″ [~1:50]

OPEN-SOURCE ARCHITECTURAL DRAWINGS

You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.

For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE

SOUTHERN FARMHOUSE


FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	**2023-02-01**	FIRST EDITION (COMPLETED BOOK)
3	**2022-11-30**	KICKSTARTER EDITION (TEST PRINTS)
2	**2022-06-21**	1ST PUBLIC RELEASE (FILES ONLINE)
1	**2022-01-01**	SCHEMATIC DESIGN PRESENTATION

+ For more project history and credits, see A0.1

1ST RCP / ELECTRICAL

A1.4

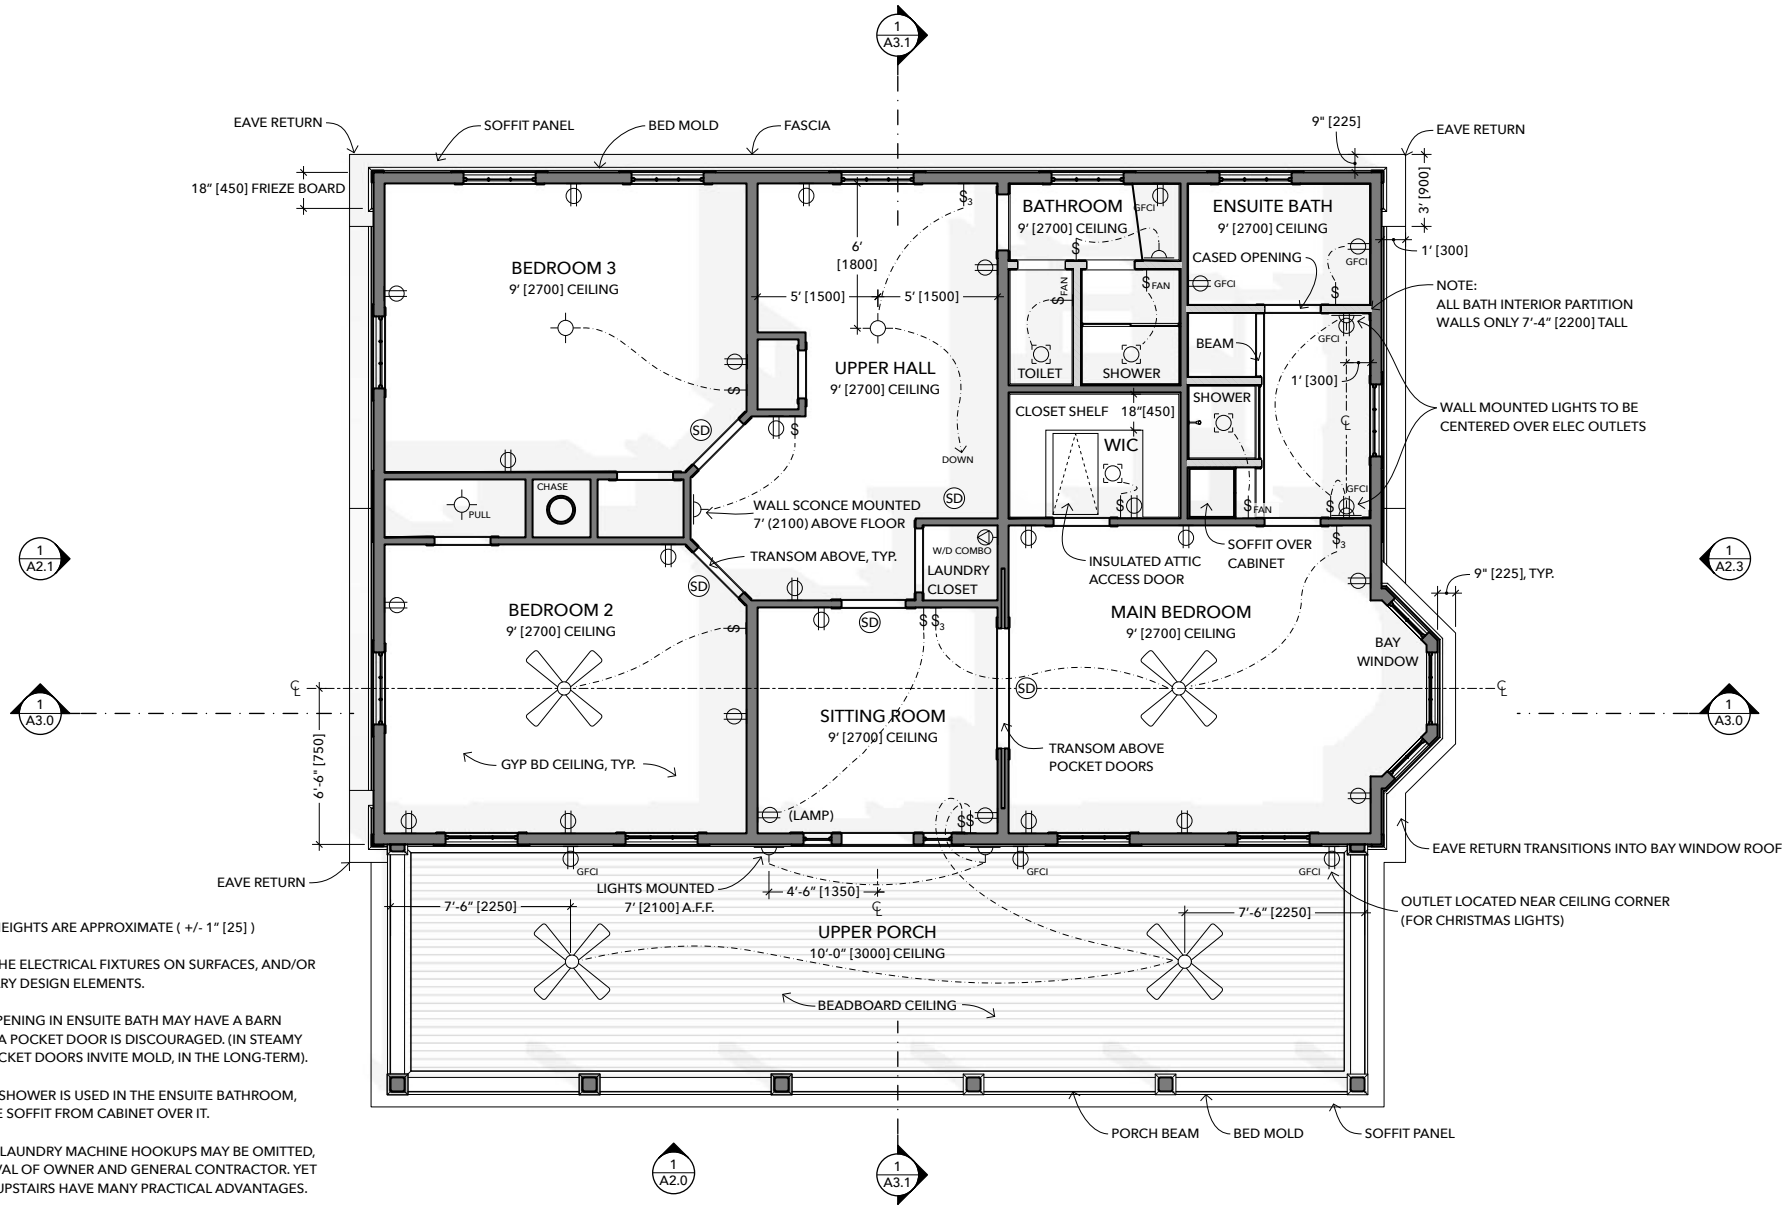

NOTES:

1. CEILING HEIGHTS ARE APPROXIMATE (+/- 1" [25])

2. CENTER THE ELECTRICAL FIXTURES ON SURFACES, AND/OR WITH PRIMARY DESIGN ELEMENTS.

3. CASED OPENING IN ENSUITE BATH MAY HAVE A BARN DOOR, BUT A POCKET DOOR IS DISCOURAGED. (IN STEAMY ROOMS, POCKET DOORS INVITE MOLD, IN THE LONG-TERM).

4. IF STEAM SHOWER IS USED IN THE ENSUITE BATHROOM, EXTEND THE SOFFIT FROM CABINET OVER IT.

5. UPSTAIRS LAUNDRY MACHINE HOOKUPS MAY BE OMITTED, PER APPROVAL OF OWNER AND GENERAL CONTRACTOR. YET MACHINES UPSTAIRS HAVE MANY PRACTICAL ADVANTAGES.

6. TRANSOM WINDOWS OVER DOUBLE DOORS MAY BE OMITTED IF THOSE POCKET DOORS ARE 8'-6" [2550] TALL.

1 2ND LEVEL - REFLECTED CEILING PLAN / ELECTRICAL PLAN

SCALE: 1/4" = 1'-0" [~1:50]

OPEN-SOURCE ARCHITECTURAL DRAWINGS

You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.

For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE

SOUTHERN FARMHOUSE


FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	**2023-02-01**	FIRST EDITION (COMPLETED BOOK)
3	**2022-11-30**	KICKSTARTER EDITION (TEST PRINTS)
2	**2022-06-21**	1ST PUBLIC RELEASE (FILES ONLINE)
1	**2022-01-01**	SCHEMATIC DESIGN PRESENTATION

+ For more project history and credits, see A0.1

2ND RCP / ELECTRICAL

A1.5

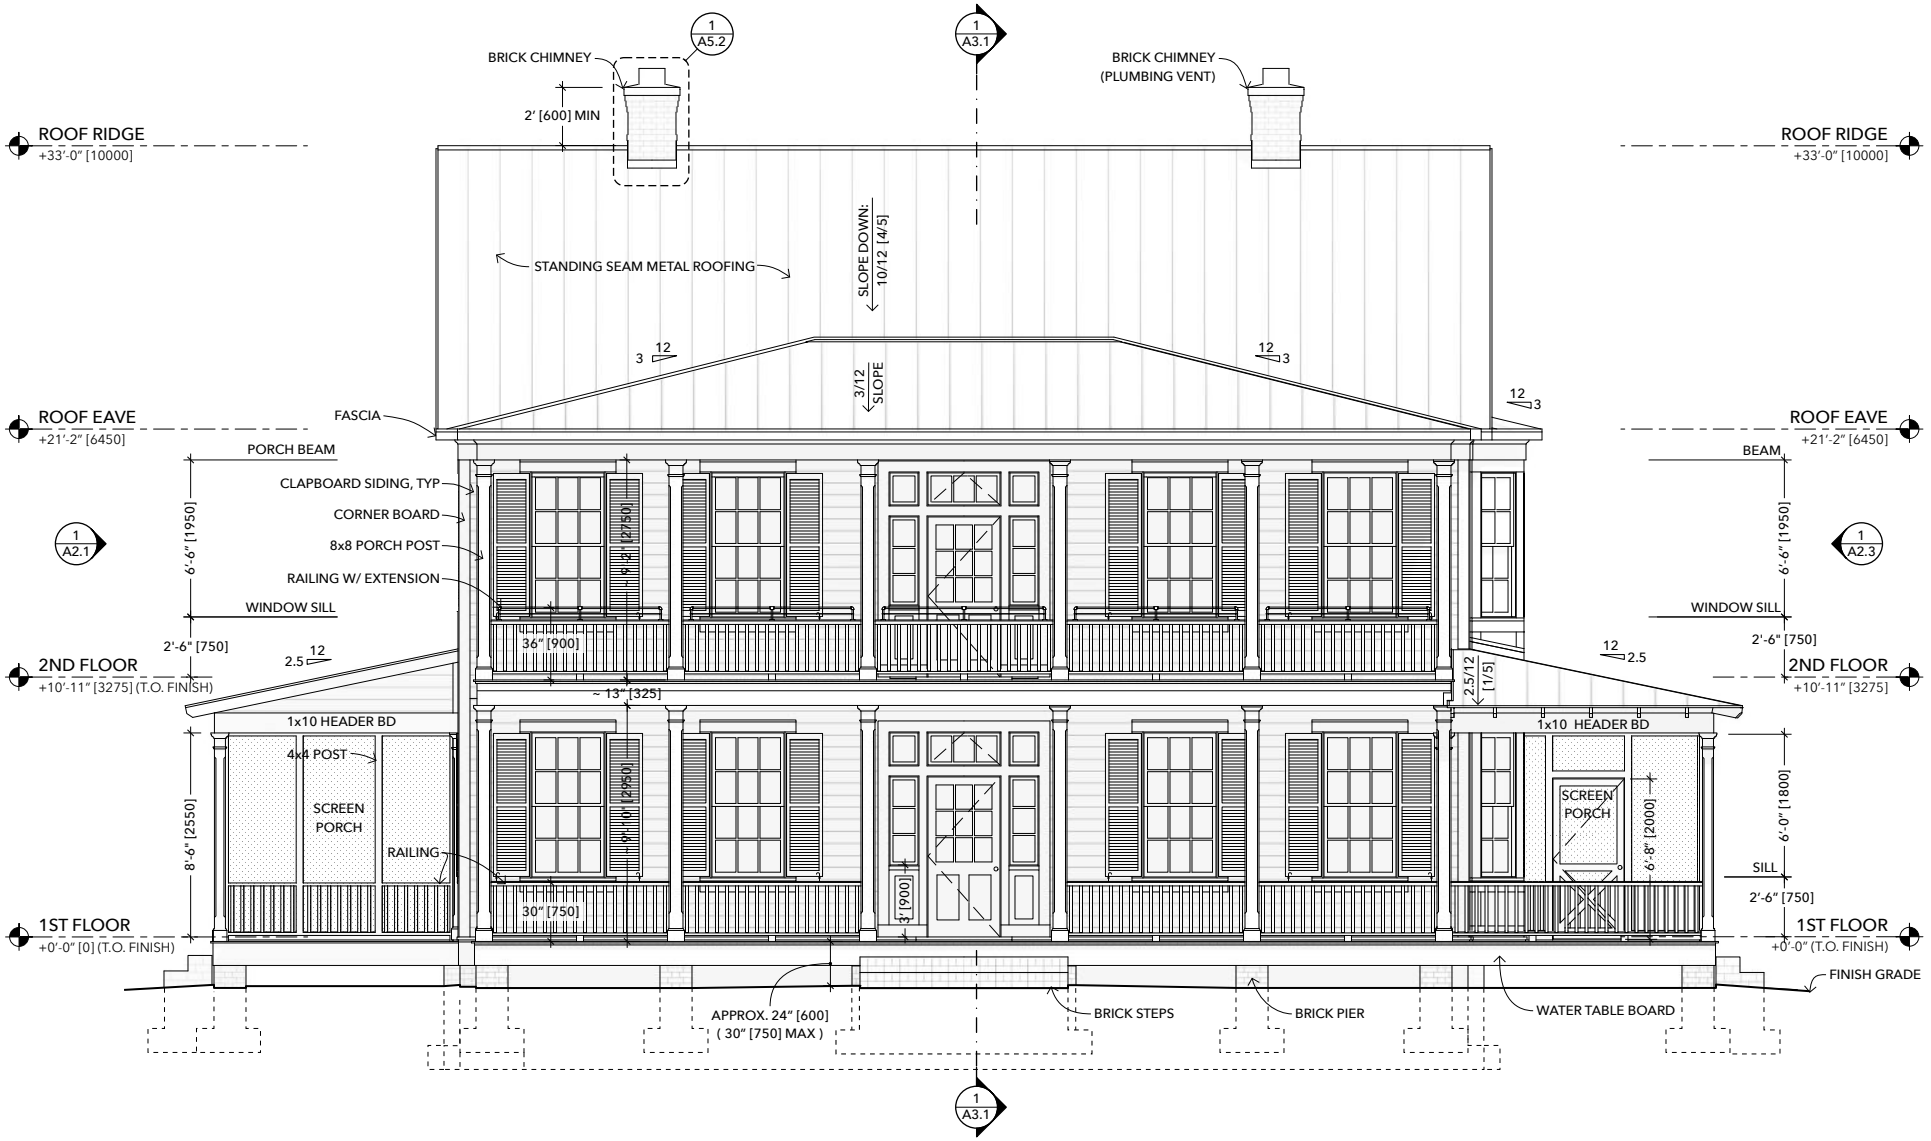

1 SOUTH ELEVATION
SCALE: 1/4" = 1'-0" [~1:50]

OPEN-SOURCE ARCHITECTURAL DRAWINGS
You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.
For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE


SOUTHERN FARMHOUSE

FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	**2023-02-01**	FIRST EDITION (COMPLETED BOOK)
3	**2022-11-30**	KICKSTARTER EDITION (TEST PRINTS)
2	**2022-06-21**	1ST PUBLIC RELEASE (FILES ONLINE)
1	**2022-01-01**	SCHEMATIC DESIGN PRESENTATION
+	For more project history and credits, see A0.1	

FRONT ELEVATION

A2.0

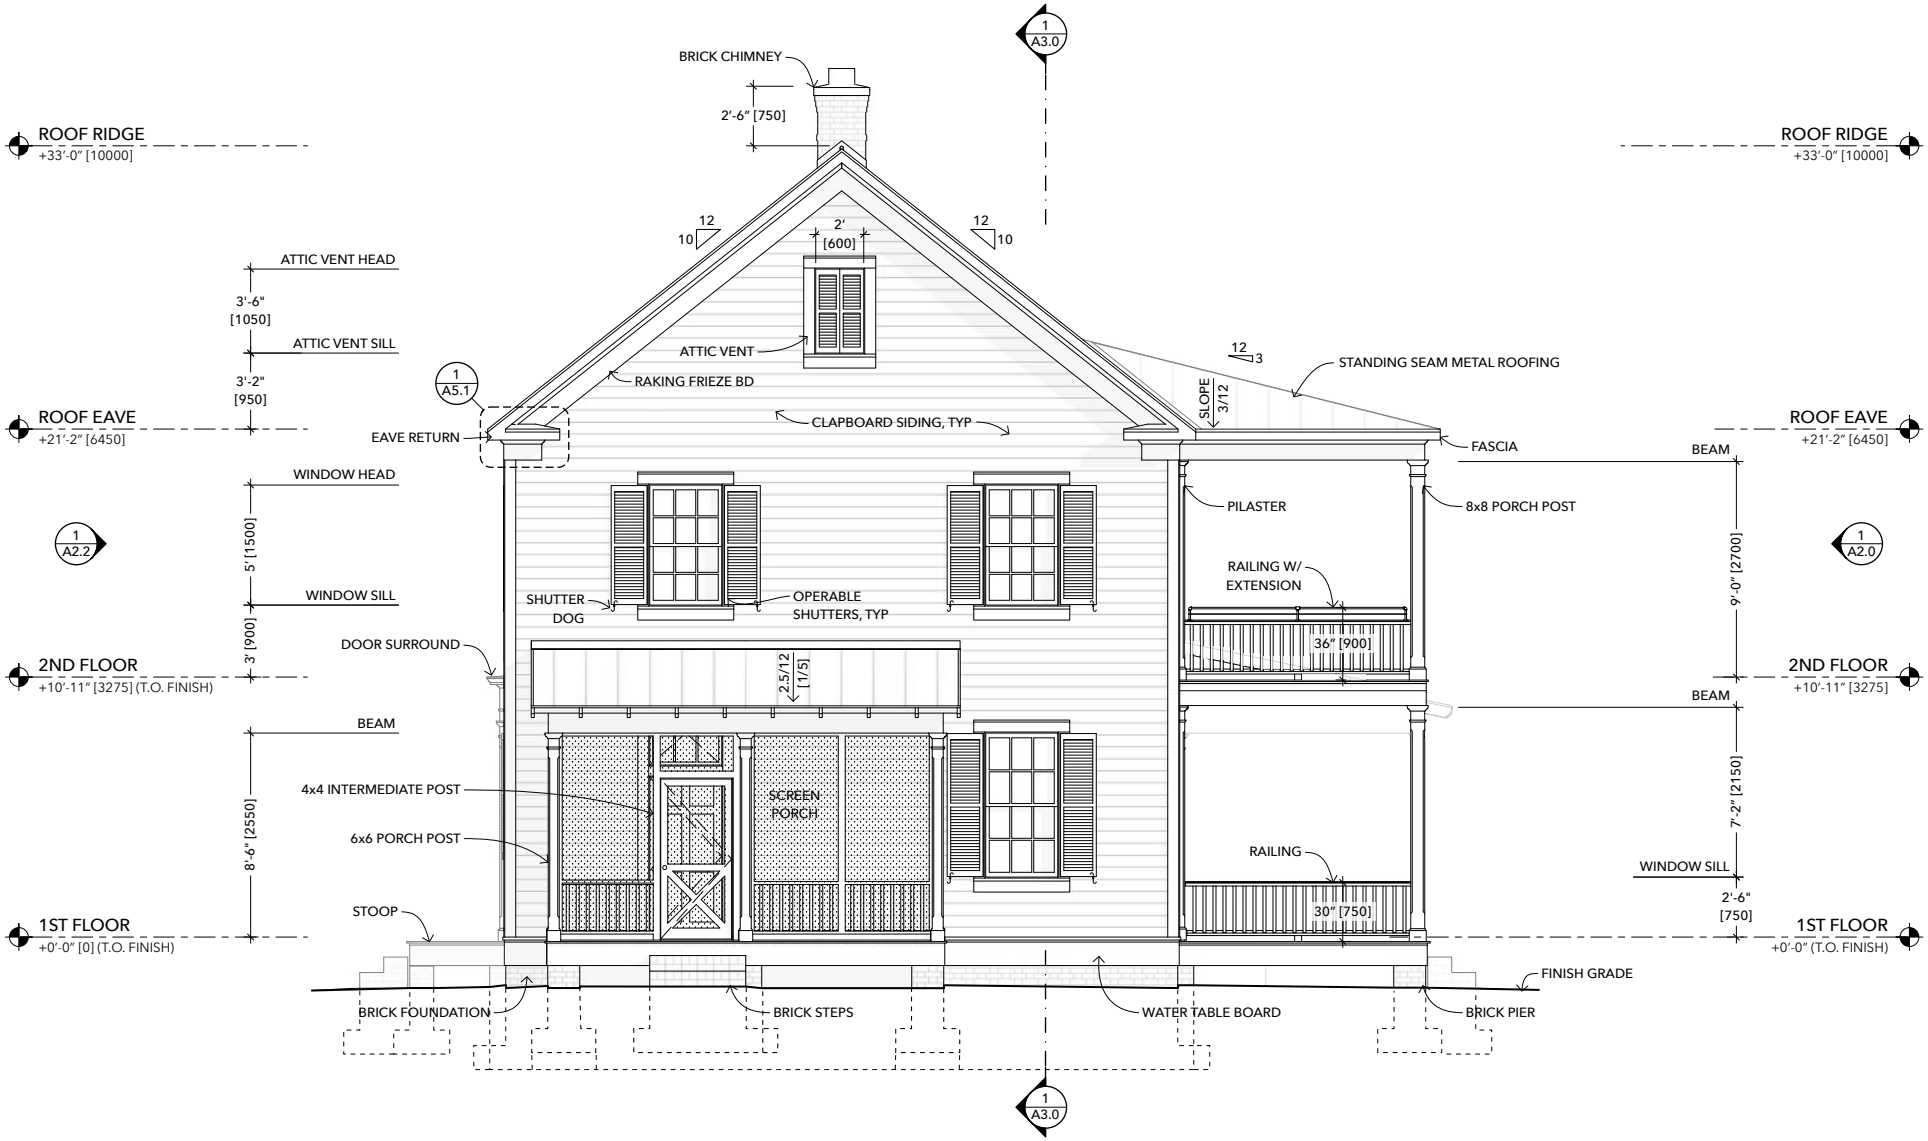

1 WEST ELEVATION
SCALE: 1/4" = 1'-0" [~1:50]

OPEN-SOURCE ARCHITECTURAL DRAWINGS
You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.
For more info, see www.creativecommons.org/licenses/by-sa/4.0.

A DESIGN BY JAY OSBORNE
SOUTHERN FARMHOUSE
FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	2023-02-01	FIRST EDITION (COMPLETED BOOK)
3	2022-11-30	KICKSTARTER EDITION (TEST PRINTS)
2	2022-06-21	1ST PUBLIC RELEASE (FILES ONLINE)
1	2022-01-01	SCHEMATIC DESIGN PRESENTATION
+		For more project history and credits, see A0.1

WEST ELEVATION

A2.1



1 NORTH ELEVATION

SCALE: 1/4" = 1'-0" [~1:50]

OPEN-SOURCE ARCHITECTURAL DRAWINGS

You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.

For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE


SOUTHERN FARMHOUSE

FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	**2023-02-01**	FIRST EDITION (COMPLETED BOOK)
3	**2022-11-30**	KICKSTARTER EDITION (TEST PRINTS)
2	**2022-06-21**	1ST PUBLIC RELEASE (FILES ONLINE)
1	**2022-01-01**	SCHEMATIC DESIGN PRESENTATION
+	For more project history and credits, see A0.1	

NORTH ELEVATION

A2.2

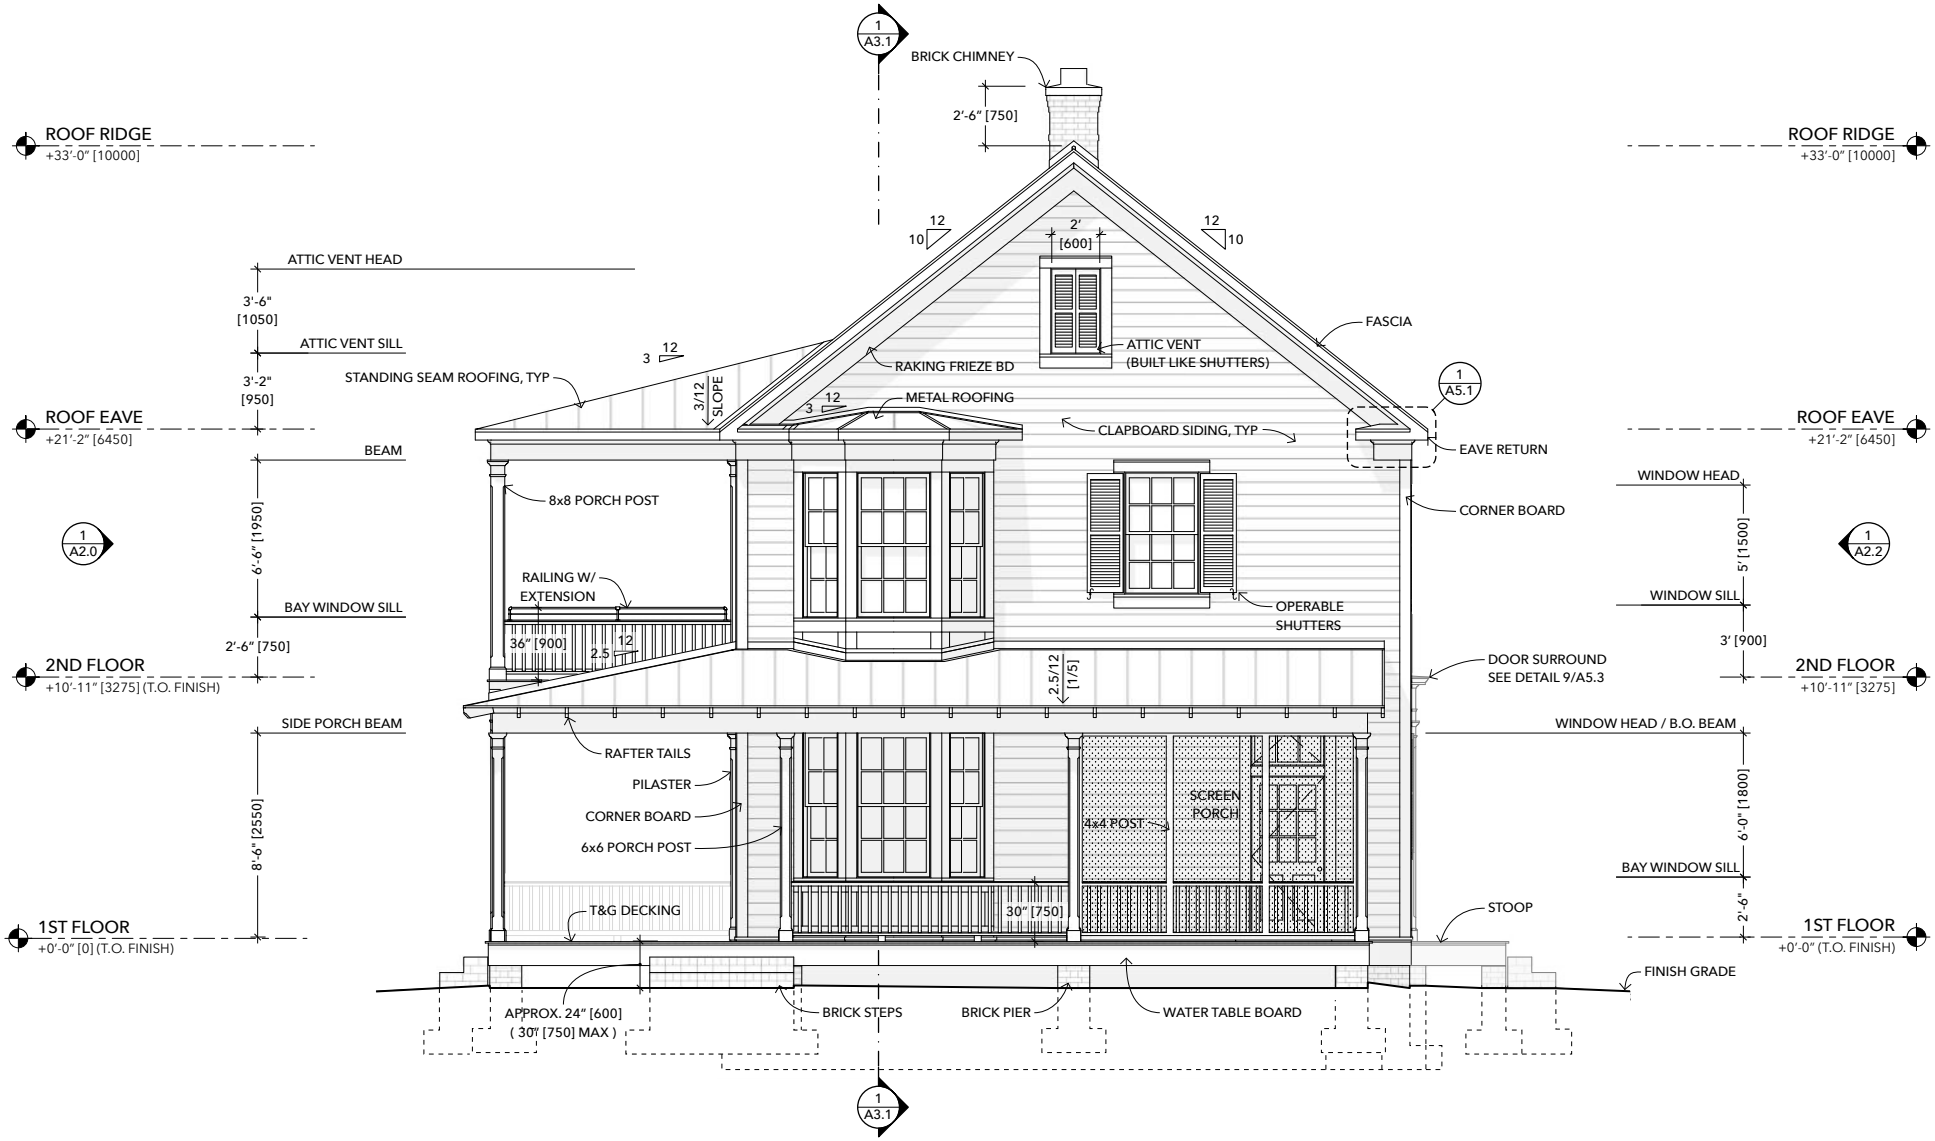

1 EAST ELEVATION
SCALE: 1/4" = 1'-0" [~1:50]

OPEN-SOURCE ARCHITECTURAL DRAWINGS
You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.
For more info, see www.creativecommons.org/licenses/by-sa/4.0.


A DESIGN BY JAY OSBORNE
SOUTHERN FARMHOUSE
FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	2023-02-01	FIRST EDITION (COMPLETED BOOK)
3	2022-11-30	KICKSTARTER EDITION (TEST PRINTS)
2	2022-06-21	1ST PUBLIC RELEASE (FILES ONLINE)
1	2022-01-01	SCHEMATIC DESIGN PRESENTATION

+ For more project history and credits, see A0.1

EAST ELEVATION

A2.3

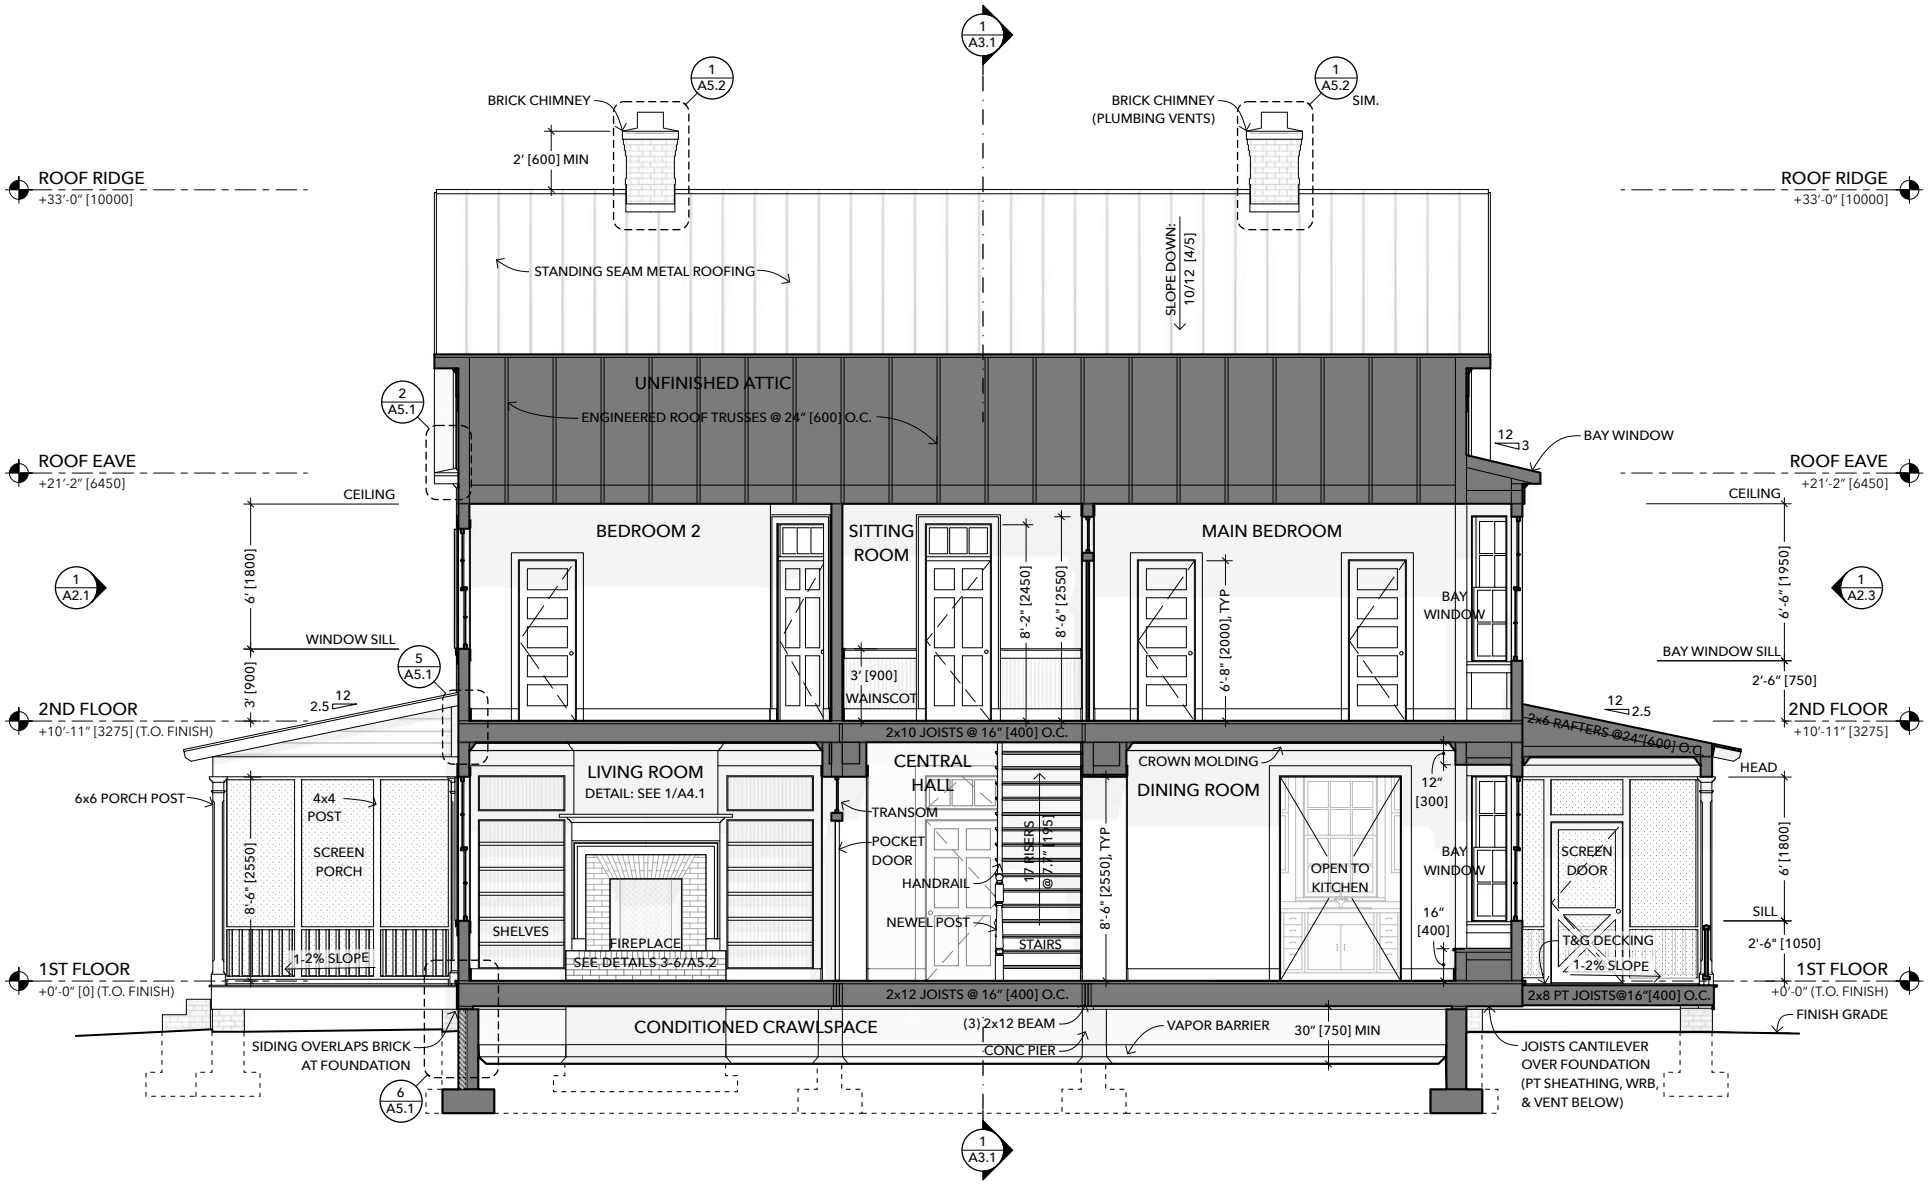

1 LONGITUDINAL SECTION

SCALE: 1/4" = 1'-0" [~1:50]

OPEN-SOURCE ARCHITECTURAL DRAWINGS

You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.

For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE


SOUTHERN FARMHOUSE

FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	**2023-02-01**	FIRST EDITION (COMPLETED BOOK)
3	**2022-11-30**	KICKSTARTER EDITION (TEST PRINTS)
2	**2022-06-21**	1ST PUBLIC RELEASE (FILES ONLINE)
1	**2022-01-01**	SCHEMATIC DESIGN PRESENTATION
+	For more project history and credits, see A0.1	

LONGITUDINAL SECTION

A3.0

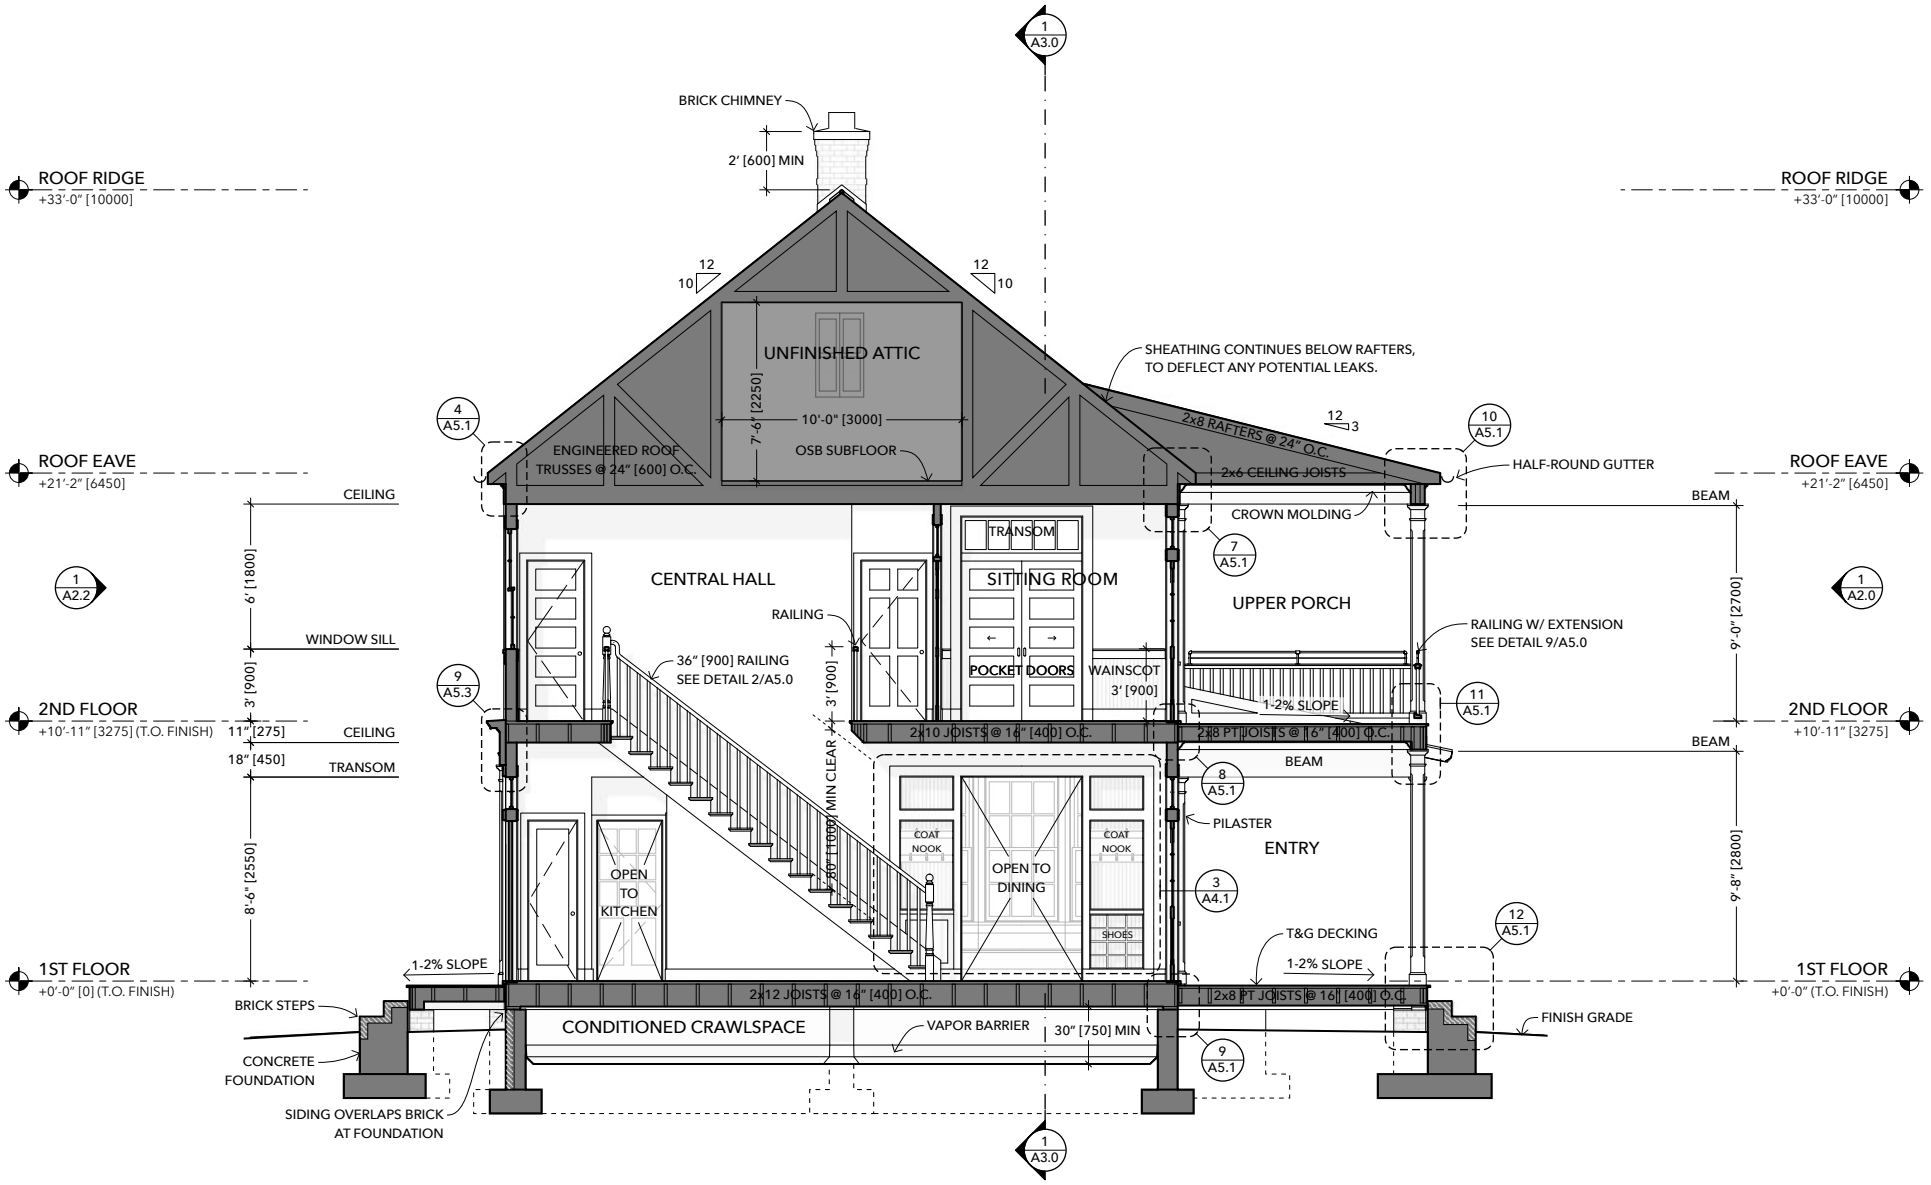

1 TRANSVERSE SECTION
SCALE: 1/4" = 1'-0" [~1:50]

OPEN-SOURCE ARCHITECTURAL DRAWINGS
You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.
For more info, see www.creativecommons.org/licenses/by-sa/4.0.

A DESIGN BY JAY OSBORNE

SOUTHERN FARMHOUSE

FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	2023-02-01	FIRST EDITION (COMPLETED BOOK)
3	2022-11-30	KICKSTARTER EDITION (TEST PRINTS)
2	2022-06-21	1ST PUBLIC RELEASE (FILES ONLINE)
1	2022-01-01	SCHEMATIC DESIGN PRESENTATION

+ For more project history and credits, see A0.1

TRANSVERSE SECTION


A3.1

FIXTURES


- X-00 REFRIGERATOR
- X-02 KITCHEN SINK
- X-04 RANGE / OVEN
- X-06 MICROWAVE HOOD
- X-08 WATER FAUCET
- X-12 DISHWASHER
- X-16 KIT. BASE CABINETS
- X-18 KIT. WALL CABINETS
- X-19 PANTRY CABINET
- X-20 TOILET
- X-22 WALL-HUNG TOILET
- X-24 CORNER SINK
- X-26 BATHROOM VANITY
- X-28 30x42 [750x1050] SHOWER
- X-29 36x36 [900x900] SHOWER
- X-30 CLAWFOOT BATHTUB
- X-40 MBR BASE DRAWERS
- X-42 BATH TALL CABINET
- X-60 MASONRY FIREPLACE
- X-68 WATER HEATER

FINISHES

- F-00 BRICK
- F-04 FIREBRICK TILE
- F-50 KITCHEN COUNTERTOP
- F-52 BATH COUNTERTOP
- F-60 HARDWOOD FLOOR
- F-62 BATH FLOOR TILE
- F-72 INT OPENING CASING
- F-78 HANDRAIL
- F-79 NEWEL POST
- F-80 BALLUSTERS

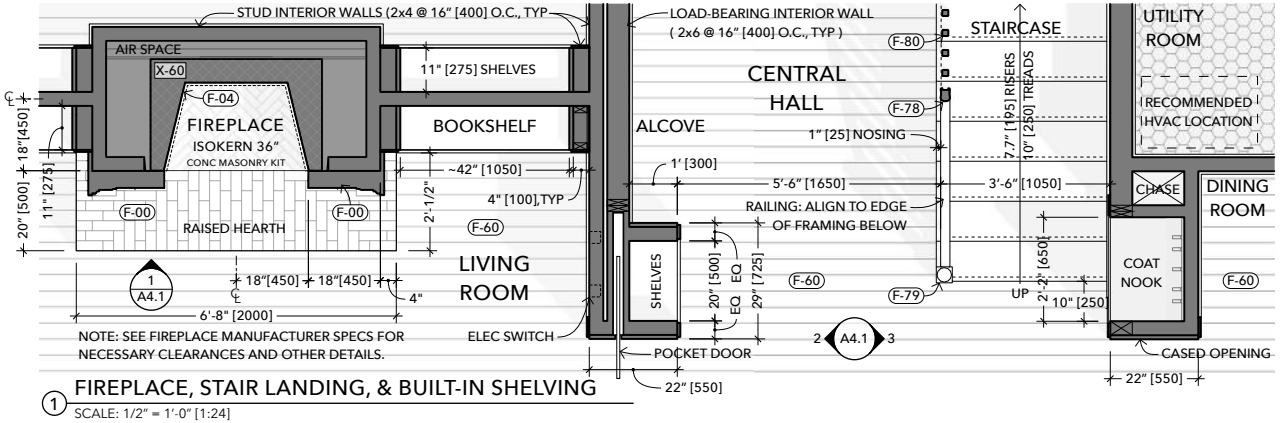


1 FIREPLACE, STAIR LANDING, & BUILT-IN SHELVING
SCALE: 1/2" = 1'-0" [1:24]

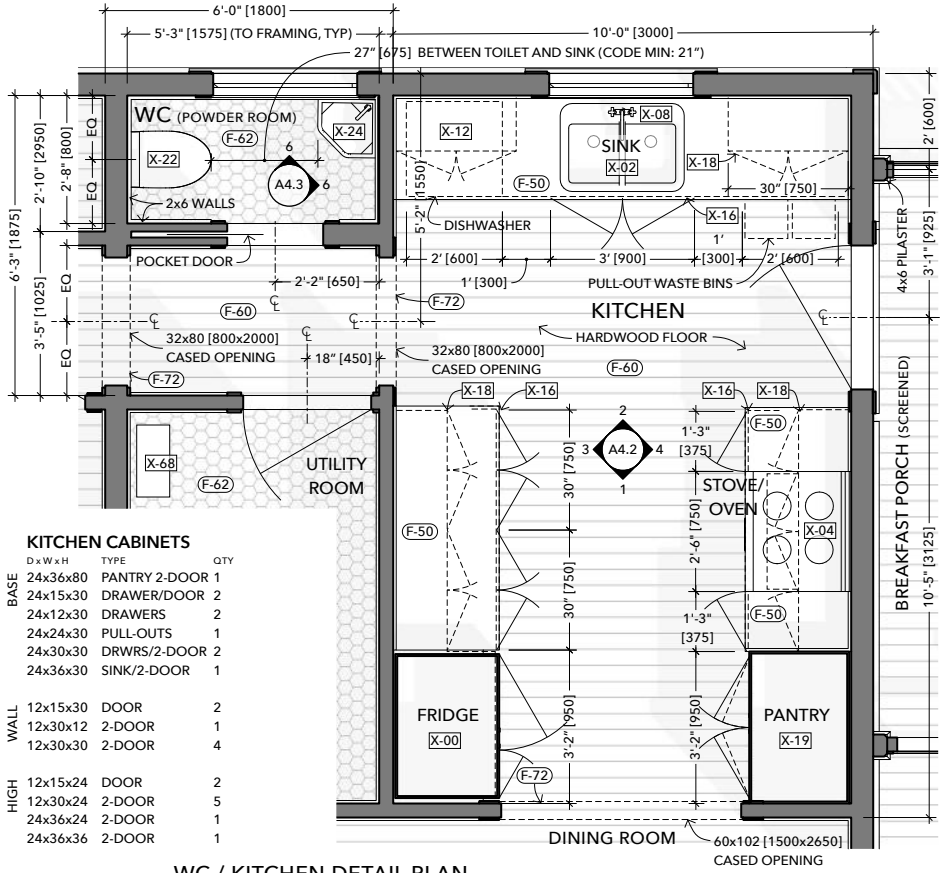

KITCHEN CABINETS

	D x W x H	TYPE	QTY
BASE	24x36x80	PANTRY 2-DOOR	1
	24x15x30	DRAWER/DOOR	2
	24x12x30	DRAWERS	2
	24x24x30	PULL-OUTS	1
	24x30x30	DRWRS/2-DOOR	2
	24x36x30	SINK/2-DOOR	1
WALL	12x15x30	DOOR	2
	12x30x12	2-DOOR	1
	12x30x30	2-DOOR	4
HIGH	12x15x24	DOOR	2
	12x30x24	2-DOOR	5
	24x36x24	2-DOOR	1
	24x36x36	2-DOOR	1

2 WC / KITCHEN DETAIL PLAN
SCALE: 1/2" = 1'-0" [1:24]

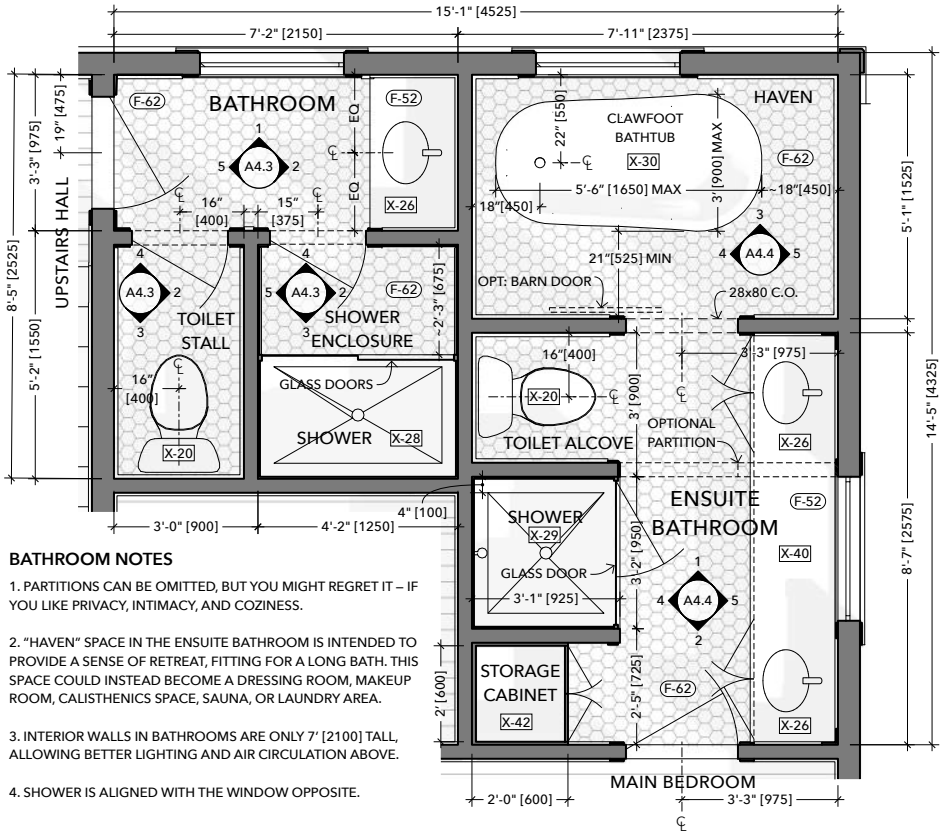

BATHROOM NOTES

1. PARTITIONS CAN BE OMITTED, BUT YOU MIGHT REGRET IT – IF YOU LIKE PRIVACY, INTIMACY, AND COZINESS.

2. "HAVEN" SPACE IN THE ENSUITE BATHROOM IS INTENDED TO PROVIDE A SENSE OF RETREAT, FITTING FOR A LONG BATH. THIS SPACE COULD INSTEAD BECOME A DRESSING ROOM, MAKEUP ROOM, CALISTHENICS SPACE, SAUNA, OR LAUNDRY AREA.

3. INTERIOR WALLS IN BATHROOMS ARE ONLY 7' [2100] TALL, ALLOWING BETTER LIGHTING AND AIR CIRCULATION ABOVE.

4. SHOWER IS ALIGNED WITH THE WINDOW OPPOSITE.

3 UPSTAIRS BATHROOMS DETAIL PLAN
SCALE: 1/2" = 1'-0" [1:24]

OPEN-SOURCE ARCHITECTURAL DRAWINGS
You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.
For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE

SOUTHERN FARMHOUSE

FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	2023-02-01	FIRST EDITION (COMPLETED BOOK)
3	2022-11-30	KICKSTARTER EDITION (TEST PRINTS)
2	2022-06-21	1ST PUBLIC RELEASE (FILES ONLINE)
1	2022-01-01	SCHEMATIC DESIGN PRESENTATION
+	For more project history and credits, see A0.1	

DETAIL PLANS

A4.0

NOTES

1. NO STEEL LINTEL AT JACK ARCH OF FIREPLACE. BRICKWORK HERE MUST BE SELF-SUPPORTING, AS IN OLD TIMES.

2. 2x12 LUMBER MAY BE USED FOR THE SHELVES.


3. SHELF SPACING MAY BE REDESIGNED AS NEEDED.

4. FIXED TRANSOM AT POCKET DOORS MAY BE REMOVED IF DOORS EXTEND TO TOP OF 8'-6" [2550] TALL OPENING.

5. POCKET DOORS MAY ALSO BE INSTALLED AT THE DINING ROOM, IF THEIR DESIGN MATCHES THE DOORS OPPOSITE.


6. ALL BRICKWORK & TILE MUST BE CENTERED & SYMMETRICAL.

7. SIMILAR DETAILS APPLY IN SIMILAR SITUATIONS. CONSISTENCY & SYMMETRY SHALL BE ASSUMED, UNLESS NOTED OTHERWISE.

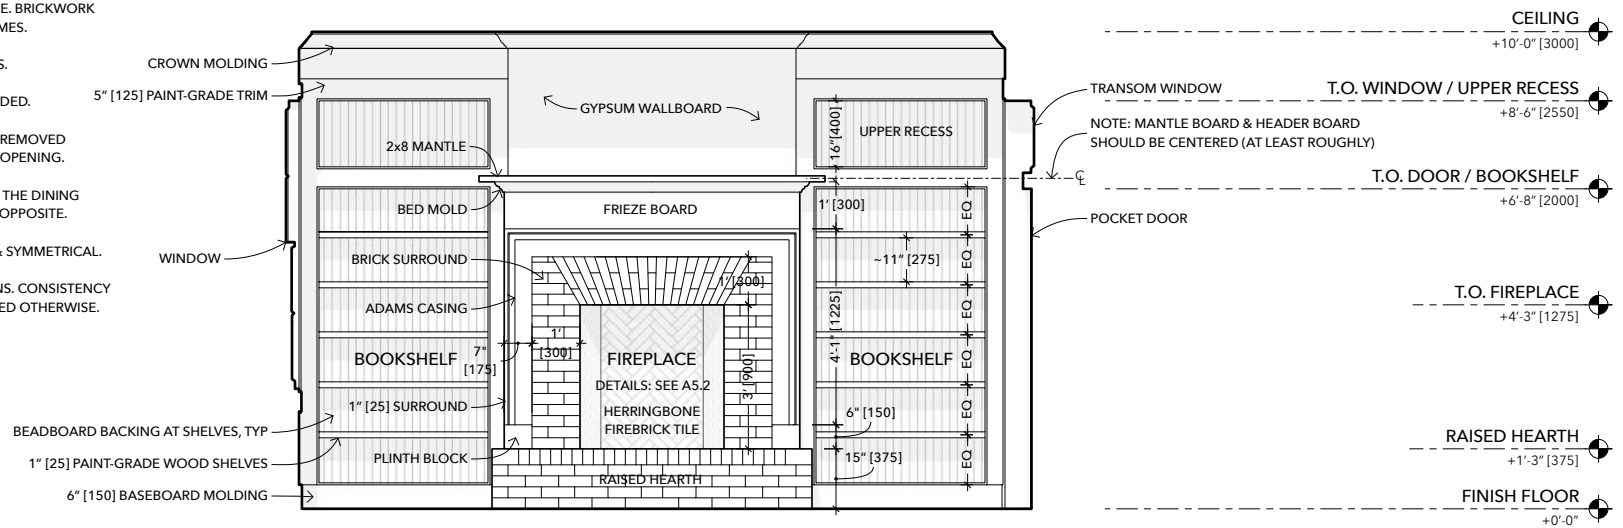


① FIREPLACE & SHELVING ELEVATION

SCALE: 1/2" = 1'-0" [1:24] PLAN: SEE A4.0

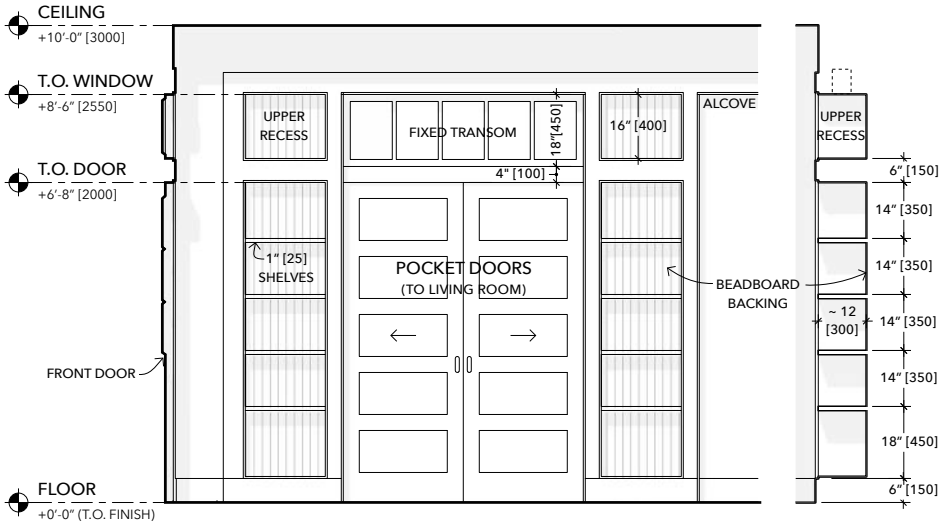

② CENTRAL HALL - SHELVING ELEVATION & SECTION

SCALE: 1/2" = 1'-0" [1:24] PLAN: SEE A4.0

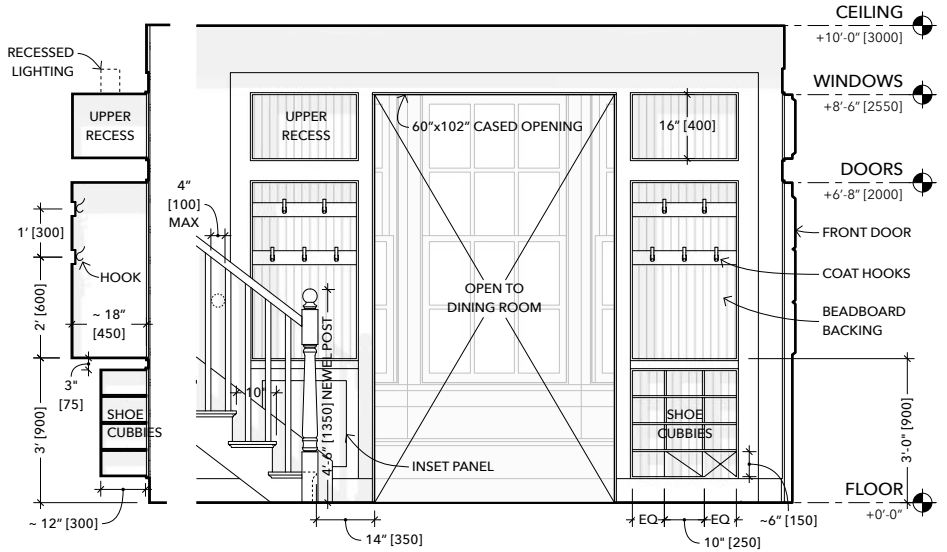

③ STAIR LANDING - COAT NOOKS SECTION & ELEVATION

SCALE: 1/2" = 1'-0" [1:24] PLAN: SEE A4.0

OPEN-SOURCE ARCHITECTURAL DRAWINGS

You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.

For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE

SOUTHERN FARMHOUSE

FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	**2023-02-01**	FIRST EDITION (COMPLETED BOOK)
3	**2022-11-30**	KICKSTARTER EDITION (TEST PRINTS)
2	**2022-06-21**	1ST PUBLIC RELEASE (FILES ONLINE)
1	**2022-01-01**	SCHEMATIC DESIGN PRESENTATION
+	For more project history and credits, see A0.1	

SHELVING ELEVATIONS


A4.1

FIXTURES

- X-00 REFRIGERATOR
- X-02 KITCHEN SINK
- X-04 RANGE / OVEN
- X-06 MICROWAVE / HOOD
- X-08 WATER FAUCET
- X-12 DISHWASHER
- X-16 BASE CABINETS
- X-18 WALL CABINETS
- X-19 PANTRY CABINET


FINISHES

- F-50 KITCHEN COUNTERTOP
- F-60 HARDWOOD FLOORING
- F-68 BASEBOARD MOLDING
- F-72 INT OPENING CASING
- F-82 CROWN MOLDING

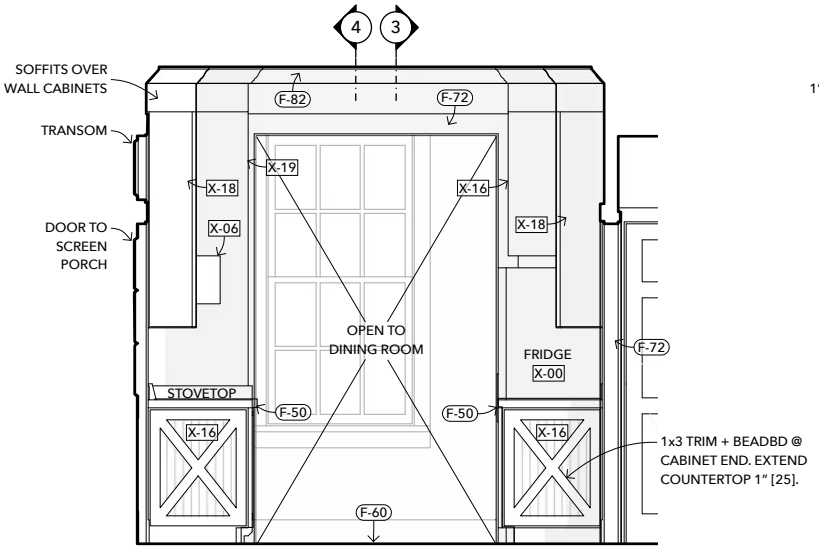


1 KITCHEN INTERIOR ELEVATION - SOUTH

SCALE: 1/2" = 1'-0" [1:24] PLAN: SEE A4.0

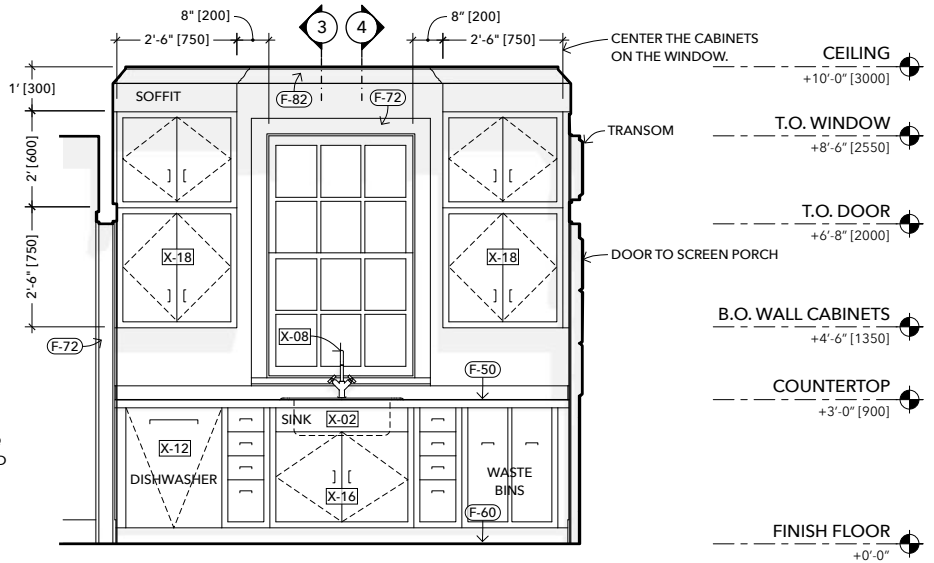


2 KITCHEN INTERIOR ELEVATION - NORTH

SCALE: 1/2" = 1'-0" [1:24] PLAN: SEE A4.0

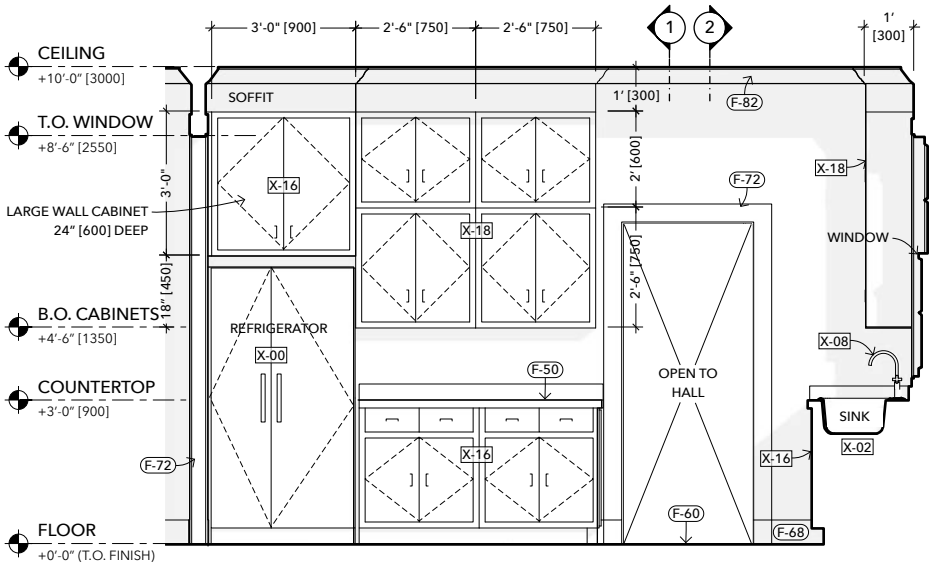

3 KITCHEN INTERIOR ELEVATION - WEST

SCALE: 1/2" = 1'-0" [1:24] PLAN: SEE A4.0

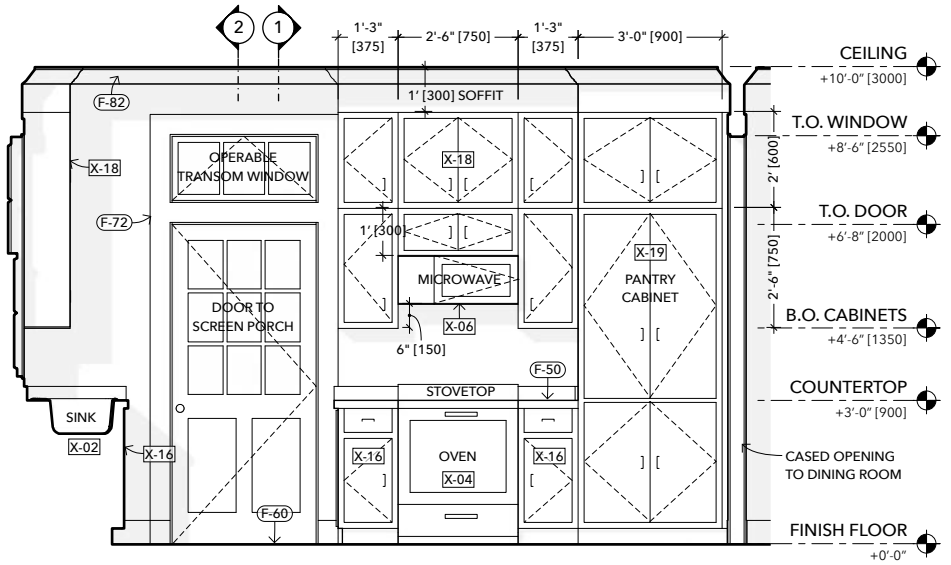

4 KITCHEN INTERIOR ELEVATION - EAST

SCALE: 1/2" = 1'-0" [1:24] PLAN: SEE A4.0

OPEN-SOURCE ARCHITECTURAL DRAWINGS

You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.

For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE

SOUTHERN FARMHOUSE

FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	**2023-02-01**	FIRST EDITION (COMPLETED BOOK)
3	**2022-11-30**	KICKSTARTER EDITION (TEST PRINTS)
2	**2022-06-21**	1ST PUBLIC RELEASE (FILES ONLINE)
1	**2022-01-01**	SCHEMATIC DESIGN PRESENTATION

+ For more project history and credits, see A0.1

KITCHEN ELEVATIONS


A4.2

FIXTURES


- X-20 TOILET
- X-22 WALL-HUNG TOILET
- X-24 CORNER SINK
- X-26 BATHROOM VANITY
- X-28 30x48 SHOWER

FINISHES


- F-52 COUNTERTOP
- F-62 FLOOR TILE
- F-64 SHOWER WALL TILE
- F-68 BASEBOARD MOLDING
- F-72 INT OPENING CASING
- F-74 BEADBOARD
- F-76 WAINSCOT CAP

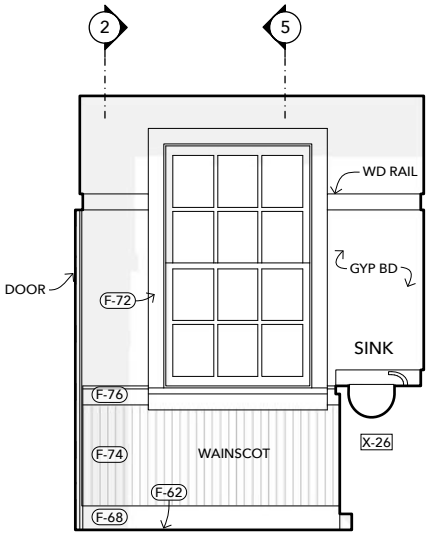


1 BATHROOM ELEVATION
SCALE: 1/2" = 1'-0" [1:24] PLAN: SEE A4.0

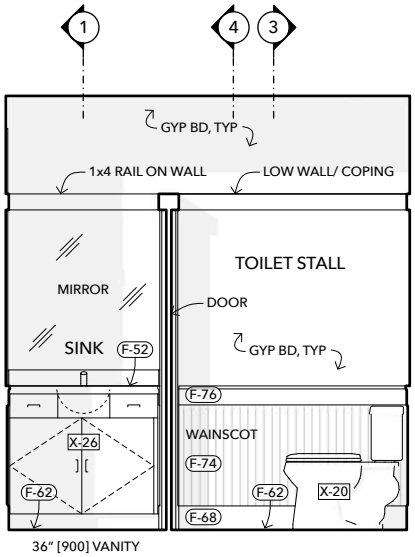


2 BATHROOM ELEVATION
SCALE: 1/2" = 1'-0" [1:24] PLAN: SEE A4.0

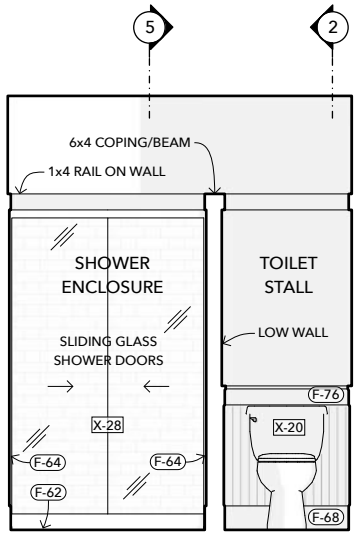


3 BATHROOM ELEVATION
SCALE: 1/2" = 1'-0" [1:24] PLAN: SEE A4.0




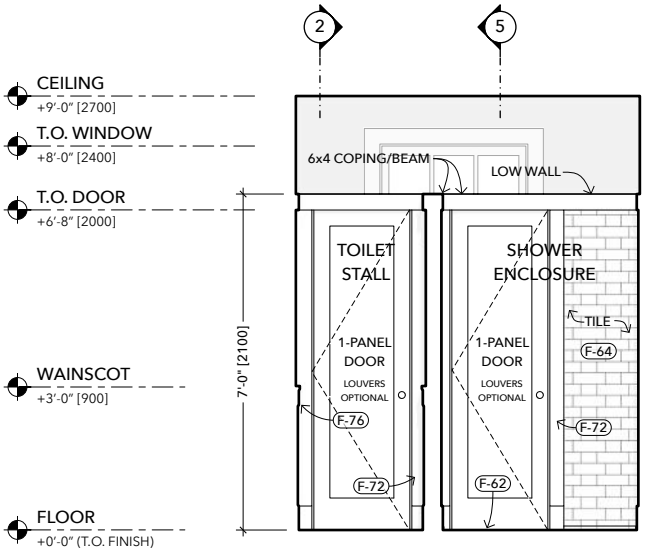

4 BATHROOM ELEVATION
SCALE: 1/2" = 1'-0" [1:24] PLAN: SEE A4.0

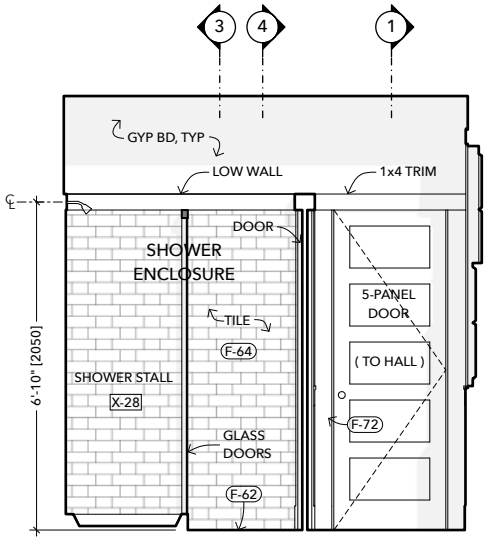

5 BATHROOM ELEVATION
SCALE: 1/2" = 1'-0" [1:24] PLAN: SEE A4.0

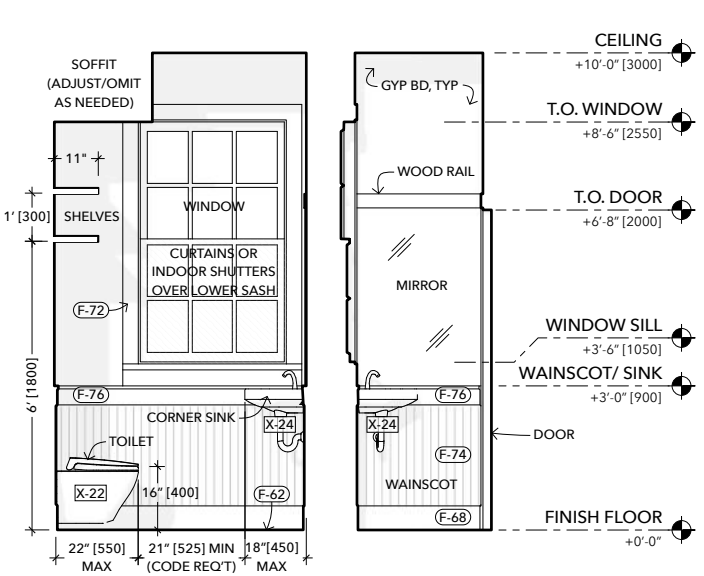

6 POWDER ROOM (WC) ELEVATIONS
SCALE: 1/2" = 1'-0" [1:24] PLAN: SEE A4.0

OPEN-SOURCE ARCHITECTURAL DRAWINGS
You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.
For more info, see www.creativecommons.org/licenses/by-sa/4.0.

A DESIGN BY JAY OSBORNE
SOUTHERN FARMHOUSE
FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	2023-02-01	FIRST EDITION (COMPLETED BOOK)
3	2022-11-30	KICKSTARTER EDITION (TEST PRINTS)
2	2022-06-21	1ST PUBLIC RELEASE (FILES ONLINE)
1	2022-01-01	SCHEMATIC DESIGN PRESENTATION

+ For more project history and credits, see A0.1

BATHROOM / WC ELEVATIONS


A4.3

FIXTURES


- X-20 TOILET
- X-26 BATHROOM VANITY
- X-29 36x36 SHOWER
- X-30 CLAWFOOT TUB
- X-40 BASE DRAWERS
- X-42 BATH TALL CABINET

FINISHES


- F-52 COUNTERTOP
- F-62 FLOOR TILE
- F-64 SHOWER WALL TILE
- F-68 BASEBOARD MOLDING
- F-72 INT OPENING CASING
- F-74 BEADBOARD
- F-76 WAINSCOT CAP

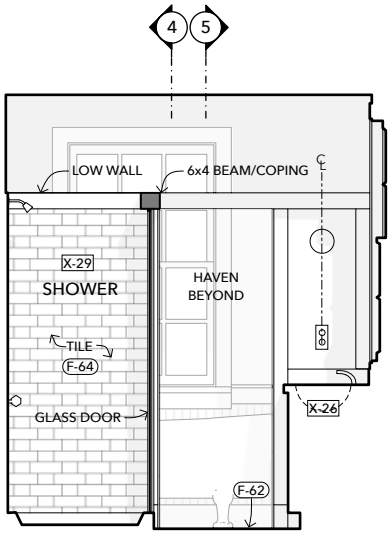


1 ENSUITE BATH ELEVATION
SCALE: 1/2" = 1'-0" [1:24] PLAN: SEE A4.0

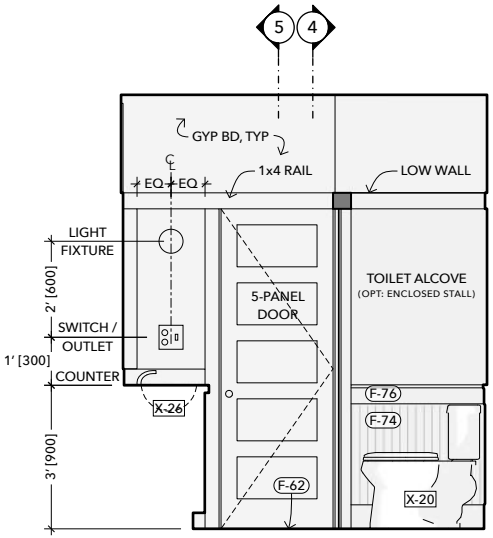


2 ENSUITE BATH ELEVATION
SCALE: 1/2" = 1'-0" [1:24] PLAN: SEE A4.0

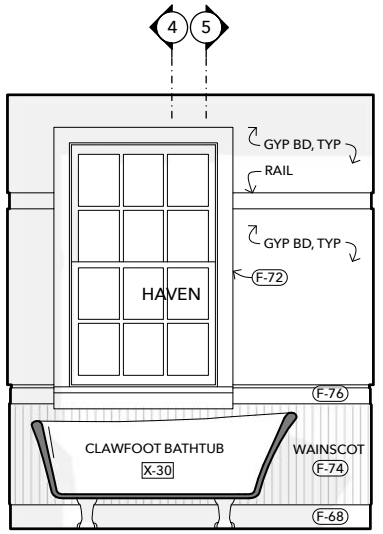

3 ENSUITE BATH ELEVATION
SCALE: 1/2" = 1'-0" [1:24] PLAN: SEE A4.0

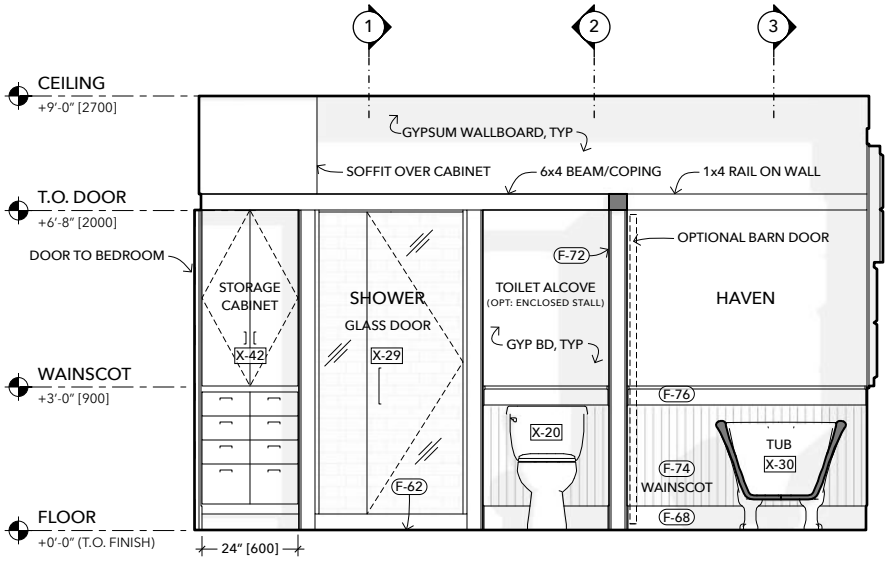

4 ENSUITE BATH ELEVATION – BEDROOM TO HAVEN
SCALE: 1/2" = 1'-0" [1:24] PLAN: SEE A4.0

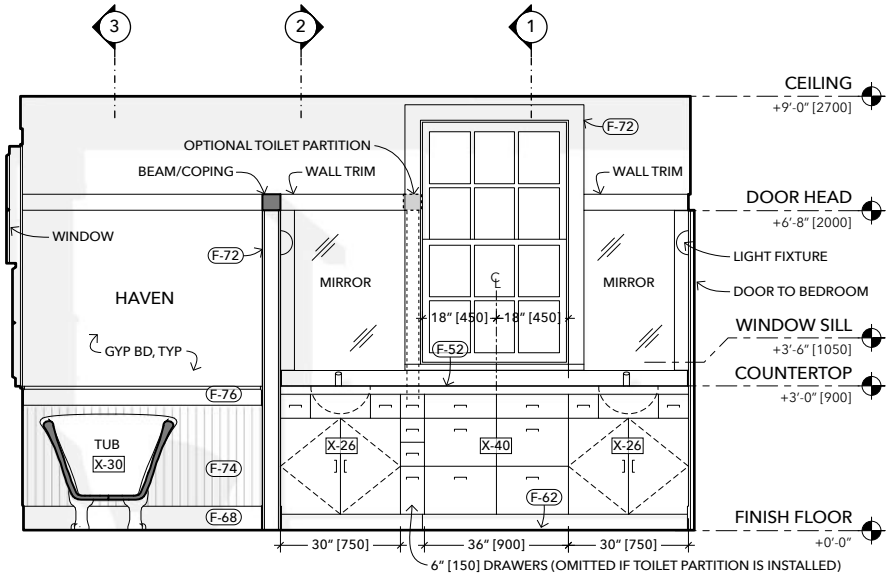

5 ENSUITE BATH ELEVATION – HAVEN TO BEDROOM
SCALE: 1/2" = 1'-0" [1:24] PLAN: SEE A4.0

OPEN-SOURCE ARCHITECTURAL DRAWINGS
You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.
For more info, see www.creativecommons.org/licenses/by-sa/4.0.

A DESIGN BY JAY OSBORNE

SOUTHERN FARMHOUSE


FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	2023-02-01	FIRST EDITION (COMPLETED BOOK)
3	2022-11-30	KICKSTARTER EDITION (TEST PRINTS)
2	2022-06-21	1ST PUBLIC RELEASE (FILES ONLINE)
1	2022-01-01	SCHEMATIC DESIGN PRESENTATION

+ For more project history and credits, see A0.1


ENSUITE BATH ELEVATIONS

A4.4

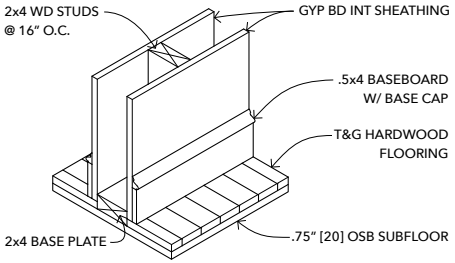


1 TYPICAL INTERIOR WALL DETAIL

SCALE: 1-1/2" = 1'-0" [~1:10]

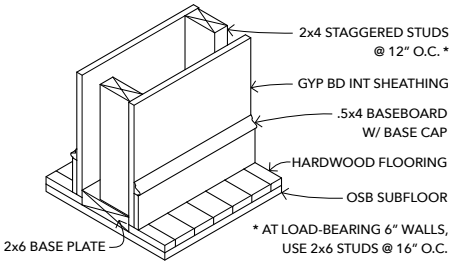


2 2x6 INTERIOR WALL DETAIL

SCALE: 1-1/2" = 1'-0" [~1:10]

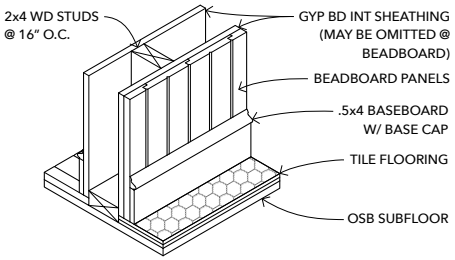


3 TYPICAL WAINSCOT BASE DETAIL

SCALE: 1-1/2" = 1'-0" [~1:10]

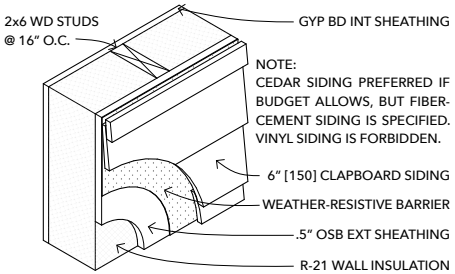


4 TYPICAL EXTERIOR WALL DETAIL

SCALE: 1-1/2" = 1'-0" [~1:10]

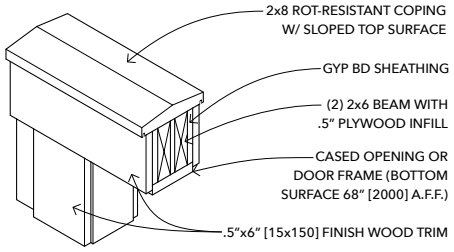


5 BATH - LOW PARTITION WALL (TOP)

SCALE: 1-1/2" = 1'-0" [~1:10]

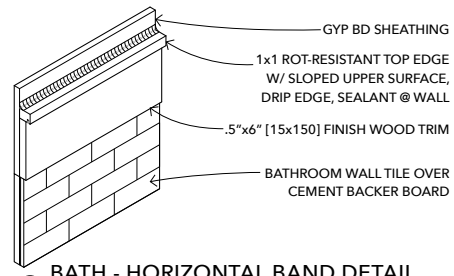


6 BATH - HORIZONTAL BAND DETAIL

SCALE: 1-1/2" = 1'-0" [~1:10]

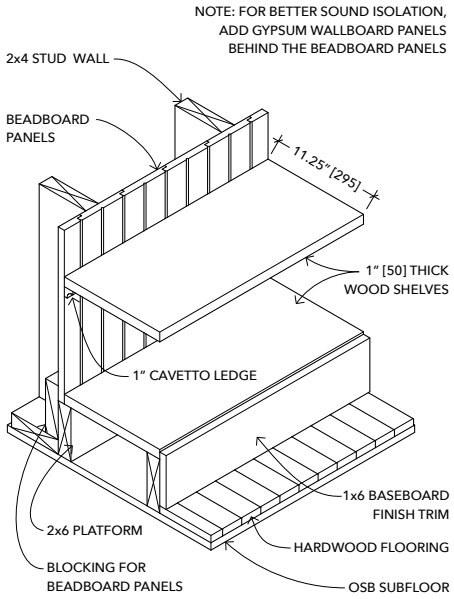


7 BUILT-IN SHELVING DETAIL

SCALE: 1-1/2" = 1'-0" [~1:10]

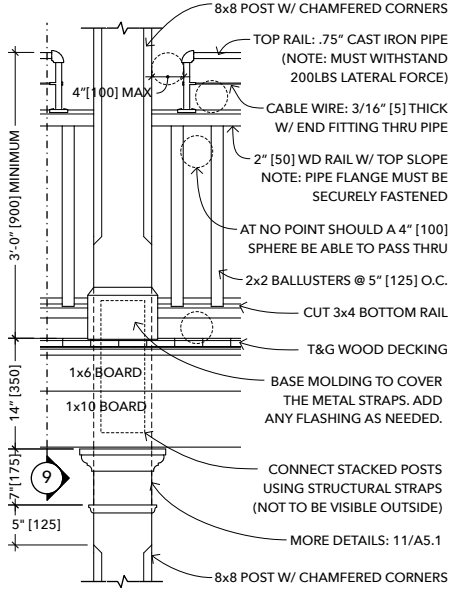


8 UPPER PORCH RAILING DETAIL

SCALE: 1" = 1'-0" [~1:10]

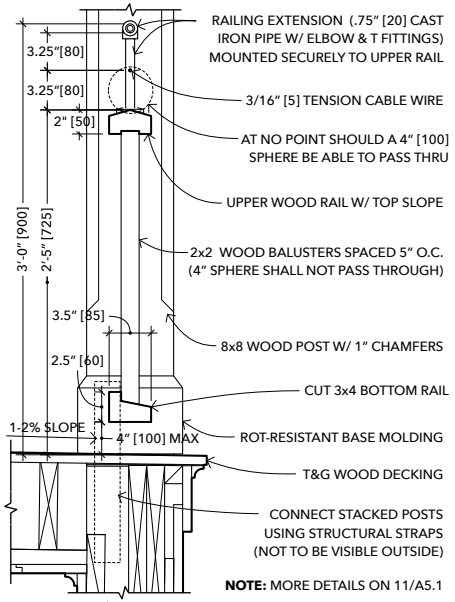


9 PORCH RAILING SECTION DETAIL

SCALE: 1-1/2" = 1'-0" [~1:10]

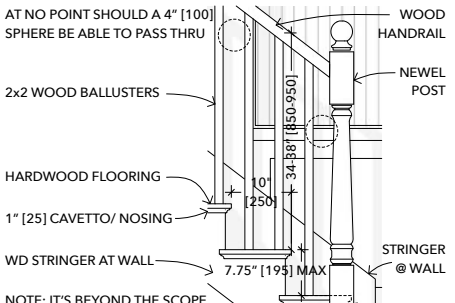


10 STAIRCASE DETAIL

SCALE: 3/4" = 1'-0" [~1:10]

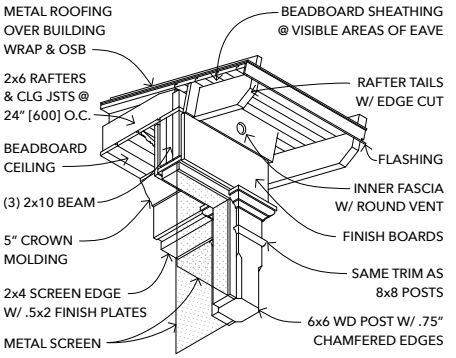

11 SCREEN PORCH DETAIL @ EAVE

SCALE: 3/4" = 1'-0" [~1:10]

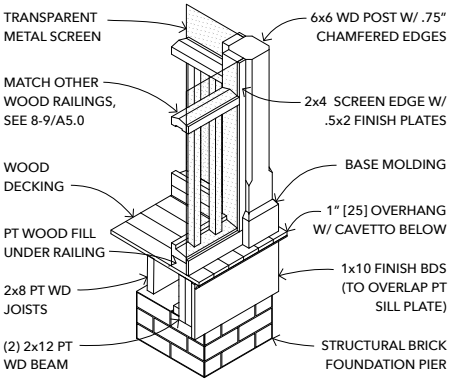

12 SCREEN PORCH DETAIL @ RAILING

SCALE: 1-1/2" = 1'-0" [~1:10]

OPEN-SOURCE ARCHITECTURAL DRAWINGS
You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.
For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE


SOUTHERN FARMHOUSE

FREE FILES AVAILABLE AT FREEFARMHOUSE.COM


4	**2023-02-01**	FIRST EDITION (COMPLETED BOOK)
3	**2022-11-30**	KICKSTARTER EDITION (TEST PRINTS)
2	**2022-06-21**	1ST PUBLIC RELEASE (FILES ONLINE)
1	**2022-01-01**	SCHEMATIC DESIGN PRESENTATION
+	For more project history and credits, see A0.1	

TYPICAL DETAILS


A5.0

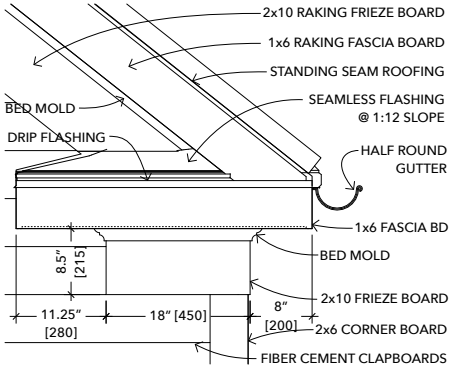


① EAVE RETURN DETAIL
SCALE: 1-1/2" = 1'-0" [~1:10]

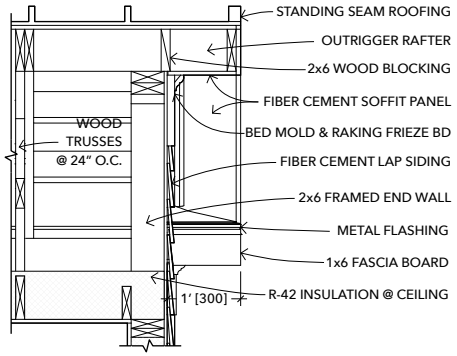


② EAVE RETURN SIDE VIEW
SCALE: 3/4" = 1'-0" [~1:10]

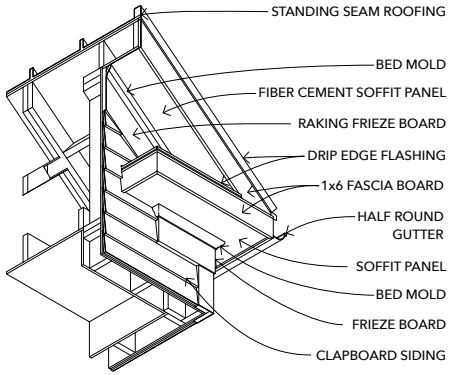


③ EAVE RETURN AXON
NTS

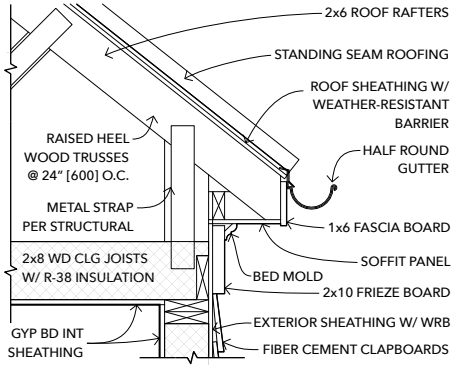


④ TYPICAL EAVE SECTION
SCALE: 1" = 1'-0" [~1:10]

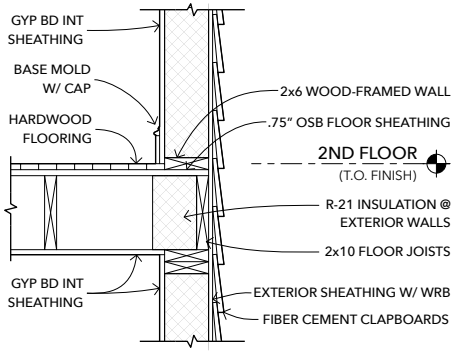


⑤ TYP. EXT. WALL @ 2ND FLOOR
SCALE: 1" = 1'-0" [~1:10]

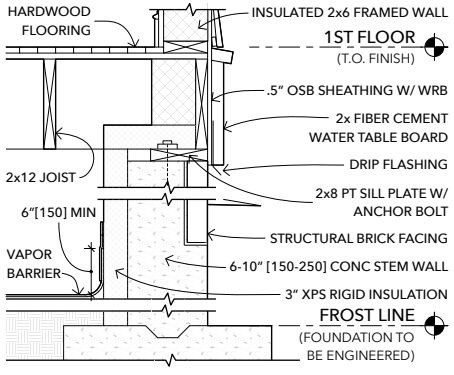


⑥ TYPICAL FOUNDATION SECTION
SCALE: 1" = 1'-0" [~1:10]

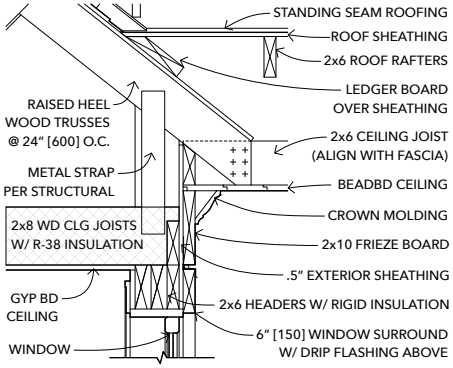


⑦ ROOF TRANSITION AT PORCH
SCALE: 1" = 1'-0" [~1:10]

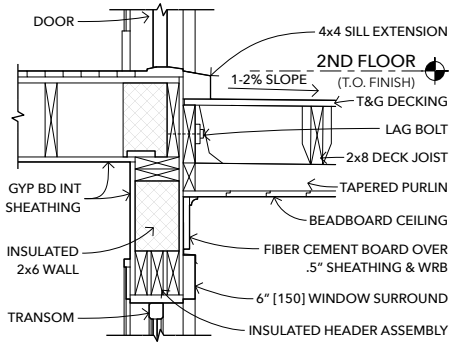


⑧ DOOR SILL @ UPPER PORCH
SCALE: 1" = 1'-0" [~1:10]

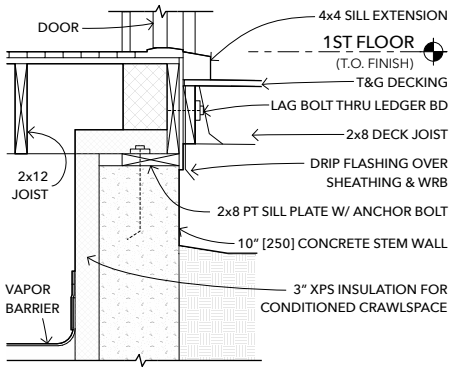


⑨ FOUNDATION @ DOOR SILL
SCALE: 1" = 1'-0" [~1:10]

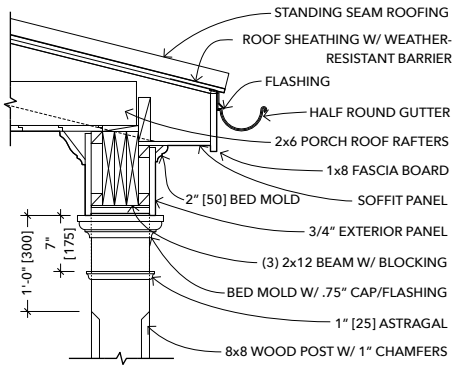

⑩ UPPER PORCH EAVE
SCALE: 1" = 1'-0" [~1:10]

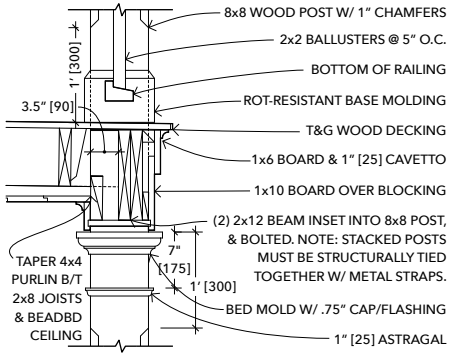

⑪ UPPER PORCH DECK @ POSTS
SCALE: 1" = 1'-0" [~1:10]

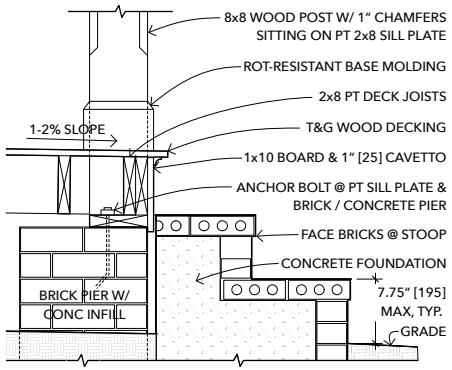

⑫ LOWER PORCH DECK & POST
SCALE: 1" = 1'-0" [~1:10]

OPEN-SOURCE ARCHITECTURAL DRAWINGS
You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.
For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE


SOUTHERN FARMHOUSE

FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	**2023-02-01**	FIRST EDITION (COMPLETED BOOK)
3	**2022-11-30**	KICKSTARTER EDITION (TEST PRINTS)
2	**2022-06-21**	1ST PUBLIC RELEASE (FILES ONLINE)
1	**2022-01-01**	SCHEMATIC DESIGN PRESENTATION
+	For more project history and credits, see A0.1	


EXTERIOR DETAILS

A5.1

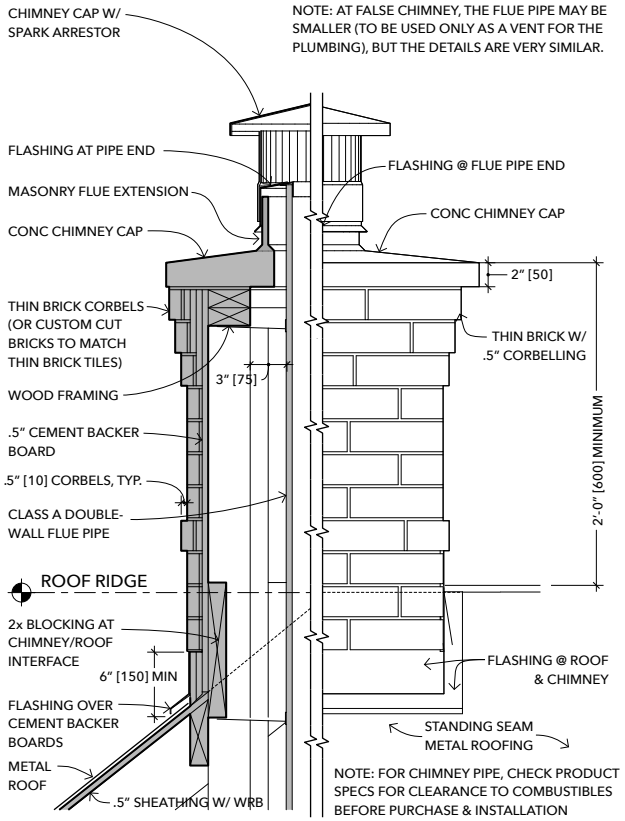


1 CHIMNEY SECTION / ELEVATION

SCALE: 1-1/2" = 1'-0" [~1:10]

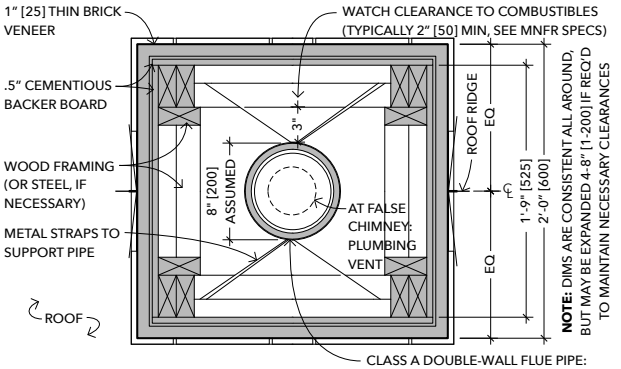


2 CHIMNEY DETAIL PLAN

SCALE: 1-1/2" = 1'-0" [~1:10]

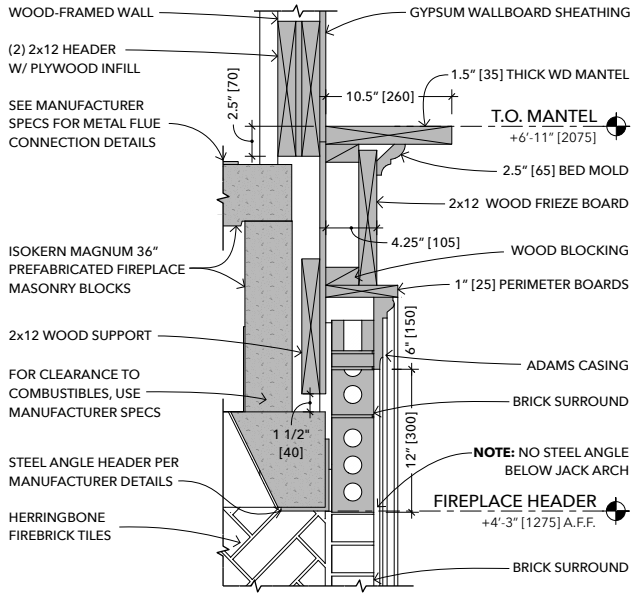


3 FIREPLACE MANTEL DETAIL

SCALE: 1-1/2" = 1'-0" [~1:10]

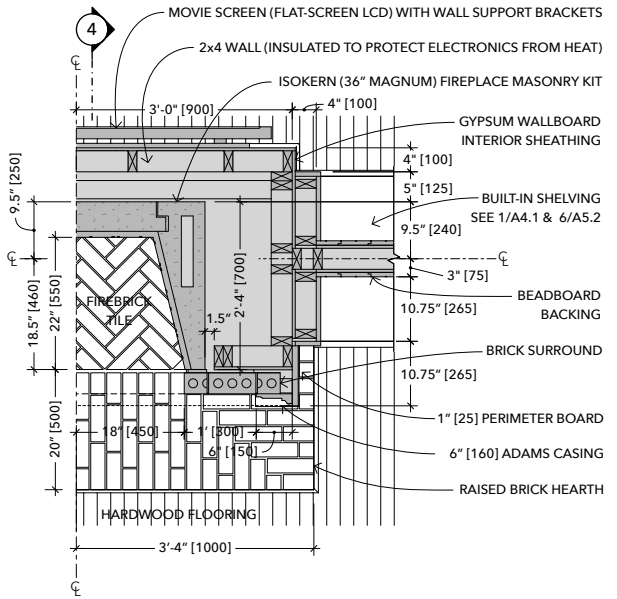


5 FIREPLACE DETAIL PLAN VIEW

SCALE: 3/4" = 1'-0" [~1:15]

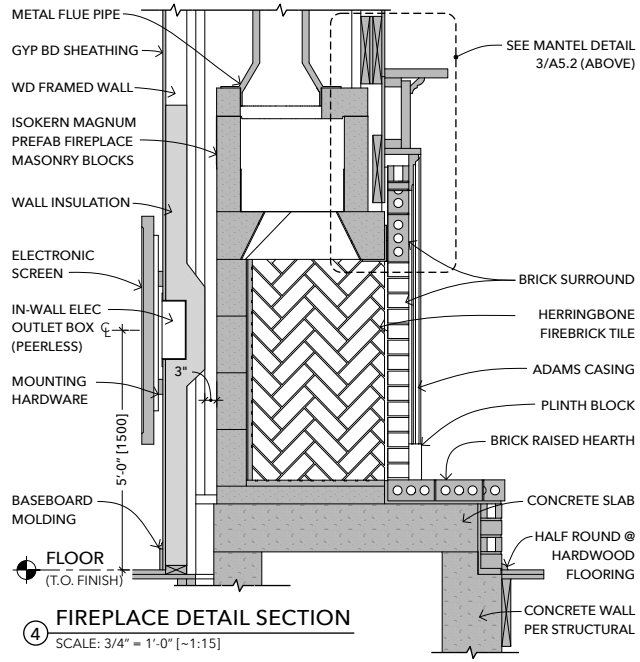

4 FIREPLACE DETAIL SECTION

SCALE: 3/4" = 1'-0" [~1:15]

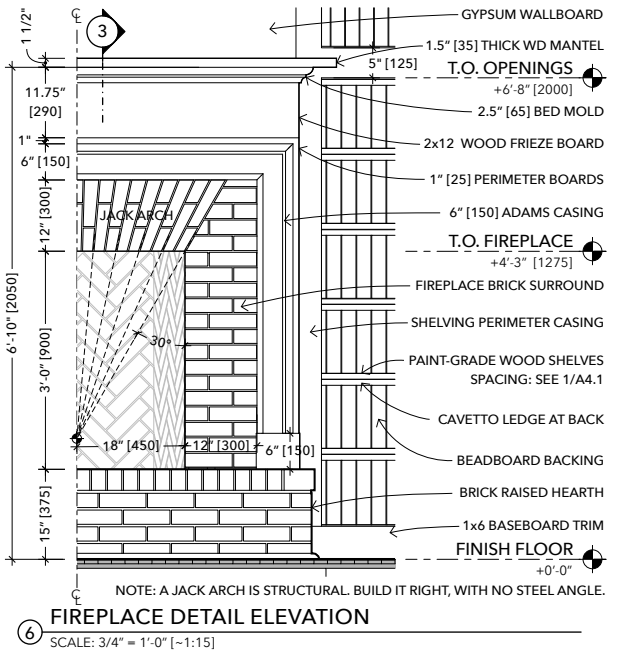

NOTE: A JACK ARCH IS STRUCTURAL. BUILD IT RIGHT, WITH NO STEEL ANGLE.

6 FIREPLACE DETAIL ELEVATION

SCALE: 3/4" = 1'-0" [~1:15]

OPEN-SOURCE ARCHITECTURAL DRAWINGS

You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.

For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE


SOUTHERN FARMHOUSE

FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	**2023-02-01**	FIRST EDITION (COMPLETED BOOK)
3	**2022-11-30**	KICKSTARTER EDITION (TEST PRINTS)
2	**2022-06-21**	1ST PUBLIC RELEASE (FILES ONLINE)
1	**2022-01-01**	SCHEMATIC DESIGN PRESENTATION
+	For more project history and credits, see A0.1	


FIREPLACE & CHIMNEY DETAILS

A5.2

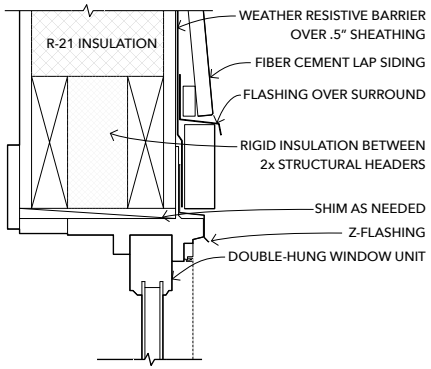


1 TYPICAL WINDOW HEAD DETAIL

SCALE: 3" = 1'-0" [~1:5]

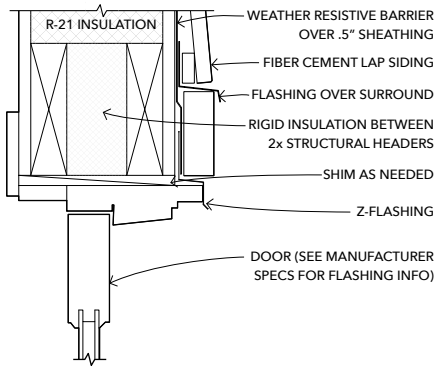


4 TYPICAL EXT DOOR HEAD DETAIL

SCALE: 3" = 1'-0" [~1:5]

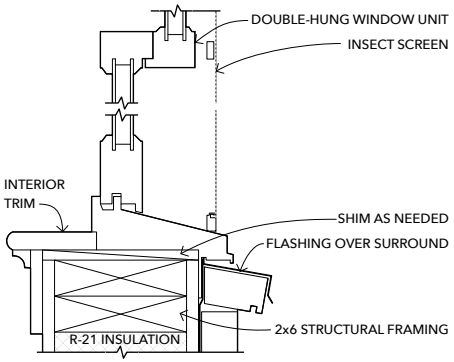


2 TYPICAL WINDOW SILL DETAIL

SCALE: 3" = 1'-0" [~1:5]

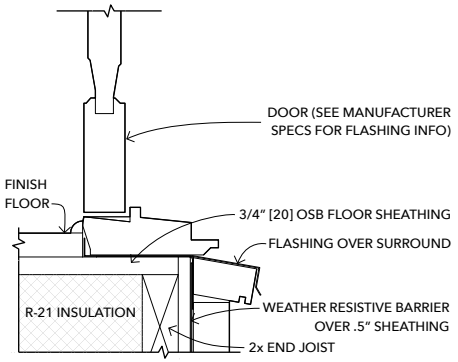


5 TYPICAL EXT DOOR SILL DETAIL

SCALE: 3" = 1'-0" [~1:5]

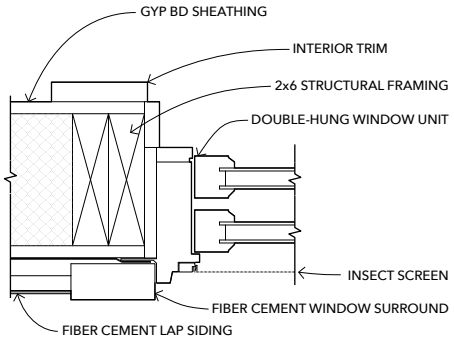


3 TYPICAL WINDOW JAMB DETAIL

SCALE: 3" = 1'-0" [~1:5]

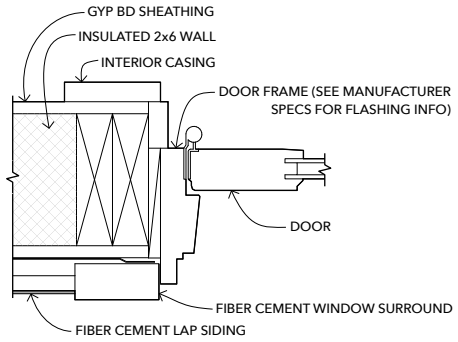


6 TYPICAL EXT DOOR JAMB DETAIL

SCALE: 3" = 1'-0" [~1:5]

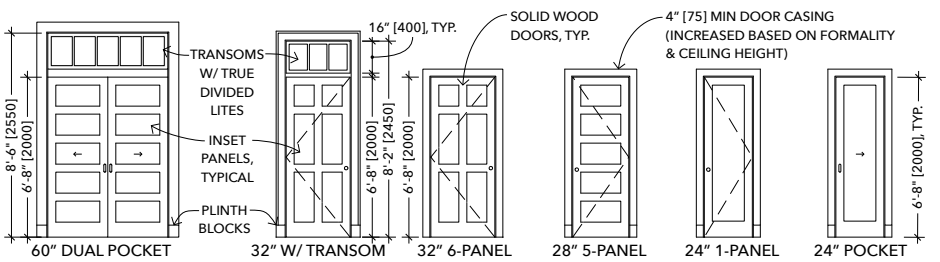


7 INTERIOR DOOR ELEVATIONS

SCALE: 1/4" = 1'-0" [~1:50]

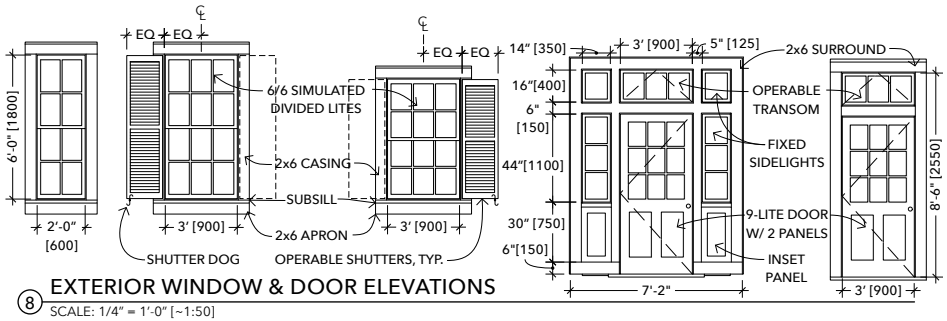


8 EXTERIOR WINDOW & DOOR ELEVATIONS

SCALE: 1/4" = 1'-0" [~1:50]

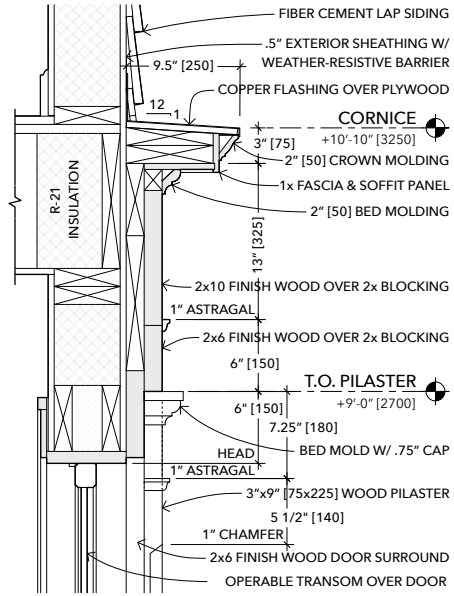

9 ENTABLATURE @ DOOR SURROUND

SCALE: 1-1/2" = 1'-0" [~1:10]

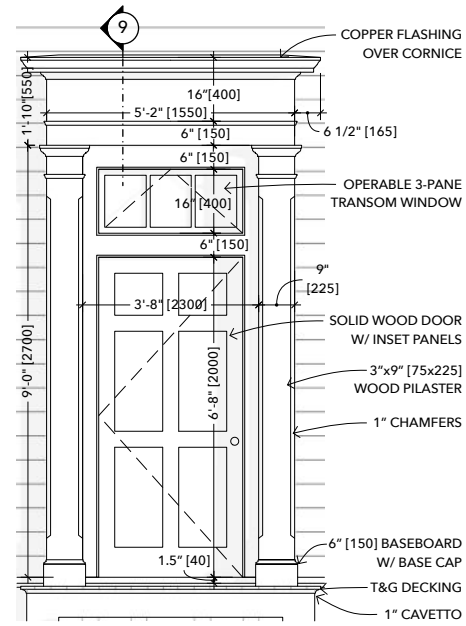

10 DOOR SURROUND DETAIL VIEW

SCALE: 1/2" = 1'-0" [~1:20]

OPEN-SOURCE ARCHITECTURAL DRAWINGS
You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.
For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE

SOUTHERN FARMHOUSE

FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	**2023-02-01**	FIRST EDITION (COMPLETED BOOK)
3	**2022-11-30**	KICKSTARTER EDITION (TEST PRINTS)
2	**2022-06-21**	1ST PUBLIC RELEASE (FILES ONLINE)
1	**2022-01-01**	SCHEMATIC DESIGN PRESENTATION
+	For more project history and credits, see A0.1	

DOORS & WINDOWS

A5.3

MARK	ITEM	SIZE	MATERIAL	NOTES	MANUFACTURER / MODEL
F-00	BRICK	-	SMOOTH BRICK	SOLID RED COLOR, SAND-FACED, AVOID WIRE CUT OR "EXTRUDED" LOOK	OLD CAROLINA BRICK COMPANY
F-02	EXTERIOR BRICK TILE	1/2" THICK	RECLAIMED BRICK	THIN BRICK VENEER, SMOOTH RED COLOR, FOR USE AT CHIMNEY	GLEN-GERY
F-04	FIREBRICK TILE	-	FIREBRICK	LAID HERRINGBONE PATTERN, FOR USE IN FIREPLACE	-
F-20	FLOOR DECKING	1x4	PAINTED WOOD	TONGUE & GROOVE, UNPAINTED CEDAR PREFERRED, PAINTED WORKS FINE	RECLAIMED PREFERRED.
F-22	PORCH COLUMN	8x8	PAINTED WOOD	CHAMFERED 1" FROM EDGES, STRUCTURALLY TIE TOGETHER STACKED POSTS	-
F-24	CLAPBOARD SIDING	6" [150]	FIBER CEMENT	VINYL AND ALUMINUM SIDING ARE FORBIDDEN (DETAILS NEVER LOOK RIGHT).	JAMES HARDIE / ARTISAN LAP SIDING
F-26	EXT OPENING CASING	5-6"	FIBER CEMENT	FOR ALL SIDING, WOOD IS STILL AN OPTION. CEDAR PREFERRED.	.75" THICK HARDIPLANK
F-28	BED MOLDING	2.5"	ROT-RESISTANT	PAINTED. EXTERIOR-GRADE. WOOD PREFERRED.	-
F-30	ASTRAGAL	1" [25]	ROT-RESISTANT	PAINTED. VARIOUS EXTERIOR-GRADE MATERIAL OPTIONS, LIKE VINYL, ARE OK.	-
F-32	CROWN MOLDING	3-6"	ROT-RESISTANT	PAINTED. EXTERIOR-GRADE. WOOD PREFERRED.	-
F-40	5V METAL ROOF PANELS	2-3" BDS	GALV STL OR COPPER	THIN BRICK VENEER, NARROW (1/4") MORTAR JOINTS, SMOOTH RED COLOR	-
F-42	STANDING SEAM ROOF	16" O.C.	GALVALUME	METAL. NO CORRUGATIONS. USE 5V PANELS FOR ECONOMICAL OPTION.	-
F-44	HALF-ROUND GUTTER	5" DIA	COPPER	GALV STEEL ALSO AN OPTION. ADJUST SIZE ACCORDING TO CLIMATE.	-
F-48	CHIMNEY CAP	~2'X2'	CONCRETE	FIT TO METAL FLUE BELOW AND MASONRY UNIT ABOVE.	-
F-50	KITCHEN COUNTERTOP	1.5-2"	-	CHOOSE: QUARTZ, BUTCHER BLOCK, PORCELAIN TILE, GRANITE, SOAPSTONE	CHOICE BY HOMEOWNER.
F-52	BATHROOM COUNTERTOP	1.5-2"	-	CHOOSE: CERAMIC, QUARTZ, PORCELAIN, BUTCHER BLOCK, GRANITE, MARBLE	CHOICE BY HOMEOWNER.
F-60	HARDWOOD FLOOR	2-3" BDS	FINISH WOOD	TONGUE & GROOVE, STAINED. CREATE FLOOR PATTERNS AS DESIRED.	RECLAIMED PREFERRED.
F-62	FLOOR TILE	1-2" HEX	CERAMIC	HEXAGONAL PATTERN. WHITE COLOR, SMALLEST TILES PREFERRED	-
F-64	WALL TILE	4" SQUARE	CERAMIC	WHITE SUBWAY TILE, OR CHOICE BY HOMEOWNER.	-
F-68	BASE MOLDING	.5"x5"	FINISH WOOD	MAY INCLUDE DECORATIVE BASE CAP MOLDING.	-
F-72	INT OPENING CASING	.5"X5"	WOOD	PAINTED, WITH .1"-THICK PLINTH BLOCK AT BASE	-
F-74	BEADBOARD	1/2"	COMPOSITE PANEL	EXTERIOR GRADE BEADBOARD TO BE USED AT PORCH CEILING.	-
F-76	WAINSCOT CAP	-	WOOD	PAINTED	-
F-78	HANDRAIL	2"	FINISH WOOD	STAINED SAME COLOR AS FLOOR. MAKE SURE TO FOLLOW ALL REGULATIONS.	-
F-79	NEWEL POST	4x4	WOOD	PAINTED, MODESTLY DECORATIVE. RECLAIMED/ANTIQUE PREFERRED.	-
F-80	BALLUSTERS	2x2	WOOD	PAINTED, MODESTLY DECORATIVE. RECLAIMED/ANTIQUE PREFERRED.	-
F-82	CROWN MOLDING	4-6"	WOOD	PAINTED, MDF ALLOWED FOR INTERIOR USE ONLY	-
F-90	WINDOW SHUTTERS	SEE NOTE	WOOD/COMPOSITE	THOU SHALT MAKE THE SHUTTERS OPERABLE, AND SIZED TO EACH WINDOW.	TIMBERLANE. OR BOARD & BATTEN.

1 MATERIALS SCHEDULE

SEE A4.0, A4.2, A4.3, A4.4

MARK	ITEM	SIZE	NOTES	MANUFACTURER / MODEL
X-00	REFRIGERATOR	36" MAX WIDTH	ENERGY STAR, COUNTER DEPTH (29" DEEP MAXIMUM)	CHOICE BY HOMEOWNER
X-02	KITCHEN SINK	30" UNIT WIDTH	DOUBLE BOWL, VITREOUS CHINA PREFERRED	HIGHPOINT COLLECTION OR SINKOLOGY FIRECLAY
X-04	RANGE / OVEN	24"x24"x36"	-	-
X-06	MICROWAVE/VENT COMBO	24" [600] WIDTH	FOR SIZE FLEXIBILITY, CABINET ABOVE THIS UNIT MAY BE OPEN SHELVING	FRIGIDAIRE UMV1422 US
X-08	WATER FAUCET	-	CHOICE BY HOMEOWNER.	-
X-12	DISHWASHER	24" [600] WIDTH	-	-
X-16	FLOOR CABINETS	VARIES	FOR AN ECONOMICAL OPTION, USE IKEA UNITS WITH CUSTOM DOORS.	IKEA / SEKTION
X-18	WALL CABINETS	VARIES	GLASS DOORS, WITH MANY PANES, PREFERRED. DOORS MAY BE BUILT DIY.	IKEA / SEKTION
X-19	PANTRY CABINET	24x36x104	FULL-HEIGHT CABINET MAY BE MULTIPLE, STACKED. ALIGN WITH OTHERS.	IKEA / SEKTION
X-20	TOILET	26"x18"	SINGLE BOWL, VITREOUS CHINA. STANDARD SIZE.	TOTO / ROWAN CST405MF OR EQUIVALENT
X-22	WC TOILET	2' MAX LENGH	WALL HUNG, 1.6 GPF (OR LOWER) SIZE CRITICAL FOR PROPER CLEARANCES.	AQUIA / WALL HUNG DUAL FLUSH TOILET CT418F
X-24	CORNER SINK	2' MAX LENGTH	VITREOUS CHINA, WALL HUNG OR PEDESTAL, SIZE CRITICAL FOR CLEARANCES.	ELIZABETHAN CLASSICS / ETCB CORNER BASIN
X-26	BATHROOM VANITY	30"(& 36") WIDE	CABINETS AND COUNTERTOP SURFACES TO BE CHOSEN BY HOMEOWNER.	-
X-28	SHOWER (SHARED)	30x48 [750x1200]	WALL TILE. GLASS DOORS OR CURTAIN. OPT: CONT. SLOPED TILE FLR.	-
X-29	SHOWER (ENSUITE. BATH)	36x36 [900x900]	FOR STEAM SHOWER OPTION: CURTAINS & CONT. SLOPED TILE FLOOR.	-
X-30	CLAWFOOT BATHTUB	36x66 MAX	ACRYLIC 59" LONG BY 28" WIDE. ANTIQUE ALSO OPTIONAL.	STREAMLINE N341CH-CH 59"
X-40	MBR BASE DRAWERS	36" WIDE	24" DEEP. MAY BE REPLACED WITH KNEE SPACE FOR A MAKEUP DESK.	IKEA / SEKTION
X-42	MBR TALL CABINET	24x24x76	MAY BE REPLACED (OR SUPPLEMENTED) WITH OPEN SHELVING	IKEA / SEKTION
X-60	MASONRY FIREPLACE UNIT	36"x36" OPEN	MAY REQUIRE CONCRETE STRUCTURAL BASE.	ISOKERN MAGNUM
X-62	WASHER DRYER COMBO	30x30x72 MAX	UPSTAIRS LAUNDRY CLOSET. VENTLESS. STACKED UNITS OPTIONAL.	HAIER HWD 1600BW
X-64	CLOTHES WASHER	~27x30	DOWNSTAIRS LAUNDRY OPTION: SIDE-BY-SIDE UNITS FOR HEAVY LOADS.	-
X-66	CLOTHES DRYER	~27x30	DOWNSTAIRS LAUNDRY OPTION: SIDE-BY-SIDE UNITS FOR HEAVY LOADS.	-
X-68	WATER HEATER	17x15x5	WALL-MOUNTED, TANKLESS, INSTANT WATER HEATER.	STIEBEL ELTRON TEMPRA
X-80	INTERIOR CEILING FAN	-	CHOICE BY HOMEOWNER.	-
X-84	EXTERIOR CEILING FAN	-	CHOICE BY HOMEOWNER.	-
X-86	EXTERIOR WALL LIGHTING	-	CHOICE BY HOMEOWNER.	-


2 FIXTURES SCHEDULE

SEE A4.0, A4.2, A4.3, A4.4

ITEM	MANUFACTURER / MODEL
EXTENSION - ADA VANITY	-
EXTENSION - FULL-HEIGHT CABINET	-
EXTENSION - BATHTUB	-
EXTENSION - MUD ROOM SINK	-
INTERIOR CEILING LIGHT SCONCE	-
INTERIOR RECESSED LIGHTS @ HALL	-
INTERIOR WALL LIGHT SCONCE	-
WC (POWDER ROOM) FLOORING	-
ENSUITE BATHROOM FLOORING	-
KIT. WASTE CABINET HARDWARE	-
KIT. SINK HARDWARE	-
SHOWER HARDWARE	-
BATH SINK HARDWARE	-
WINDOW SHUTTER HARDWARE	-
METAL CHIMNEY CAP	-
(OPT) PORCH HANGING LIGHT	-
(OPT) KITCHEN FLOORING (IF UNIQUE)	-
(OPT) DECORATIVE PORCH BRACKET	-
(OPT) DECORATIVE GABLE BRACKET	-
(OPT) INT FIREPLACE BRICK (IF UNIQUE)	-

3 ADDITIONAL PRODUCT CHOICES

NOTE: MAY BE OMITTED, OR GIVEN MULTIPLE OPTIONS.

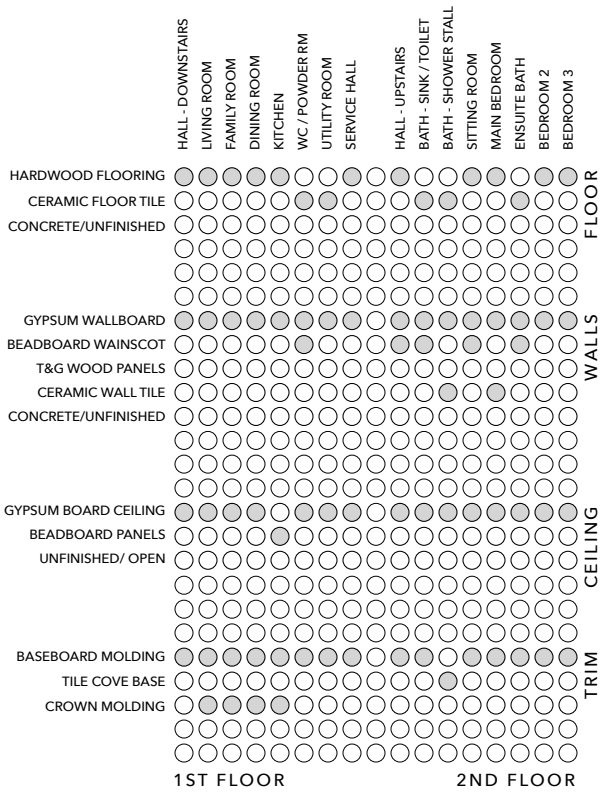

4 ROOM FINISHES SCHEDULE

NO SCALE

OPEN-SOURCE ARCHITECTURAL DRAWINGS

You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.

For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE

SOUTHERN FARMHOUSE

FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	**2023-02-01**	FIRST EDITION (COMPLETED BOOK)
3	**2022-11-30**	KICKSTARTER EDITION (TEST PRINTS)
2	**2022-06-21**	1ST PUBLIC RELEASE (FILES ONLINE)
1	**2022-01-01**	SCHEMATIC DESIGN PRESENTATION
+	For more project history and credits, see A0.1	

SCHEDULES

A6.0




3 NORTH ELEVATION - WITH SIDE EXTENSIONS

SCALE: 1/8" = 1'-0" [~1:100]




4 SOUTH ELEVATION - WITH SIDE EXTENSIONS

SCALE: 1/8" = 1'-0" [~1:100]

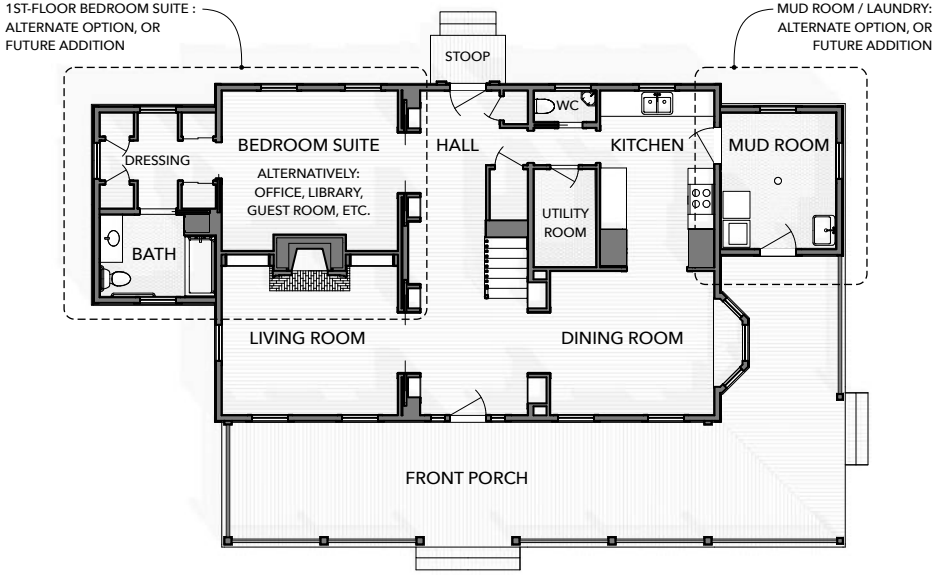

1 1ST FLOOR PLAN - WITH SIDE EXTENSIONS

SCALE: 1/8" = 1'-0" [~1:100] NOTE: SEE DETAIL PLAN ON SHEET A1.1x

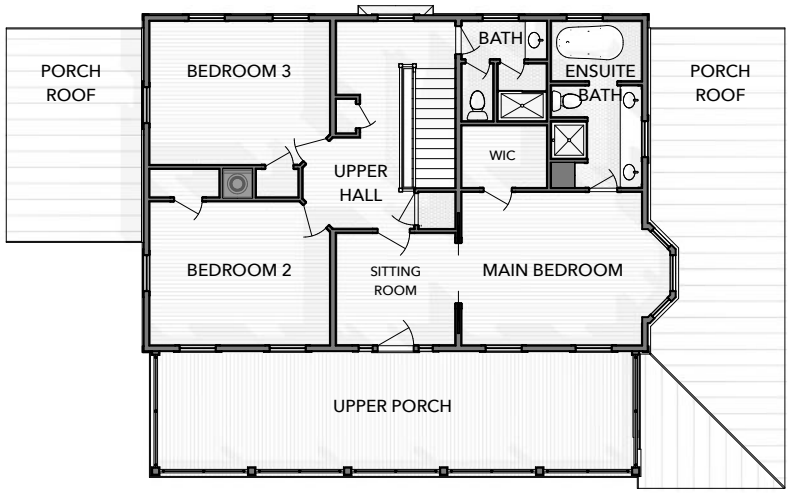

2 2ND FLOOR PLAN (UNCHANGED)

SCALE: 1/8" = 1'-0" [~1:100] NOTE: SEE DETAIL PLAN ON SHEET A1.2

OPEN-SOURCE ARCHITECTURAL DRAWINGS
You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.
For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE

SOUTHERN FARMHOUSE

FREE FILES AVAILABLE AT FREEFARMHOUSE.COM


4	**2023-02-01**	FIRST EDITION (COMPLETED BOOK)
3	**2022-11-30**	KICKSTARTER EDITION (TEST PRINTS)
2	**2022-06-21**	1ST PUBLIC RELEASE (FILES ONLINE)
1	**2022-01-01**	SCHEMATIC DESIGN PRESENTATION
+	For more project history and credits, see A0.1	

EXTENDED DESIGN: INTRODUCTION

A0.3x

DOORS

- (A) 36x80 [900x2000] 9-LITE DOOR & 36x16 [900x400] TRANSOM
- (B) 36x80 [900x2000] 6-PANEL DOOR & 36x16 [900x400] TRANSOM
- (D) 32x80 [800x2000] 6-PANEL DOOR
- (E) 28x80 [700x2000] 5-PANEL DOOR
- (F) 24x80 [600x2000] 1-PANEL DOOR (OPTIONAL: LOUVERS)
- (G) 24x80 [600x2000] 1-PANEL POCKET DOOR
- (H) 60x80 [1500x2000] 5-PANEL POCKET DRS & 60x18 [1500x450] TR
- (I) 36x80 [900x2000] 5-PANEL POCKET DOOR & 36x16 [900x400] TR
- (J) 32x80 [800x2000] DOUBLE SLIDING CLOSET DOORS, LOUVERED

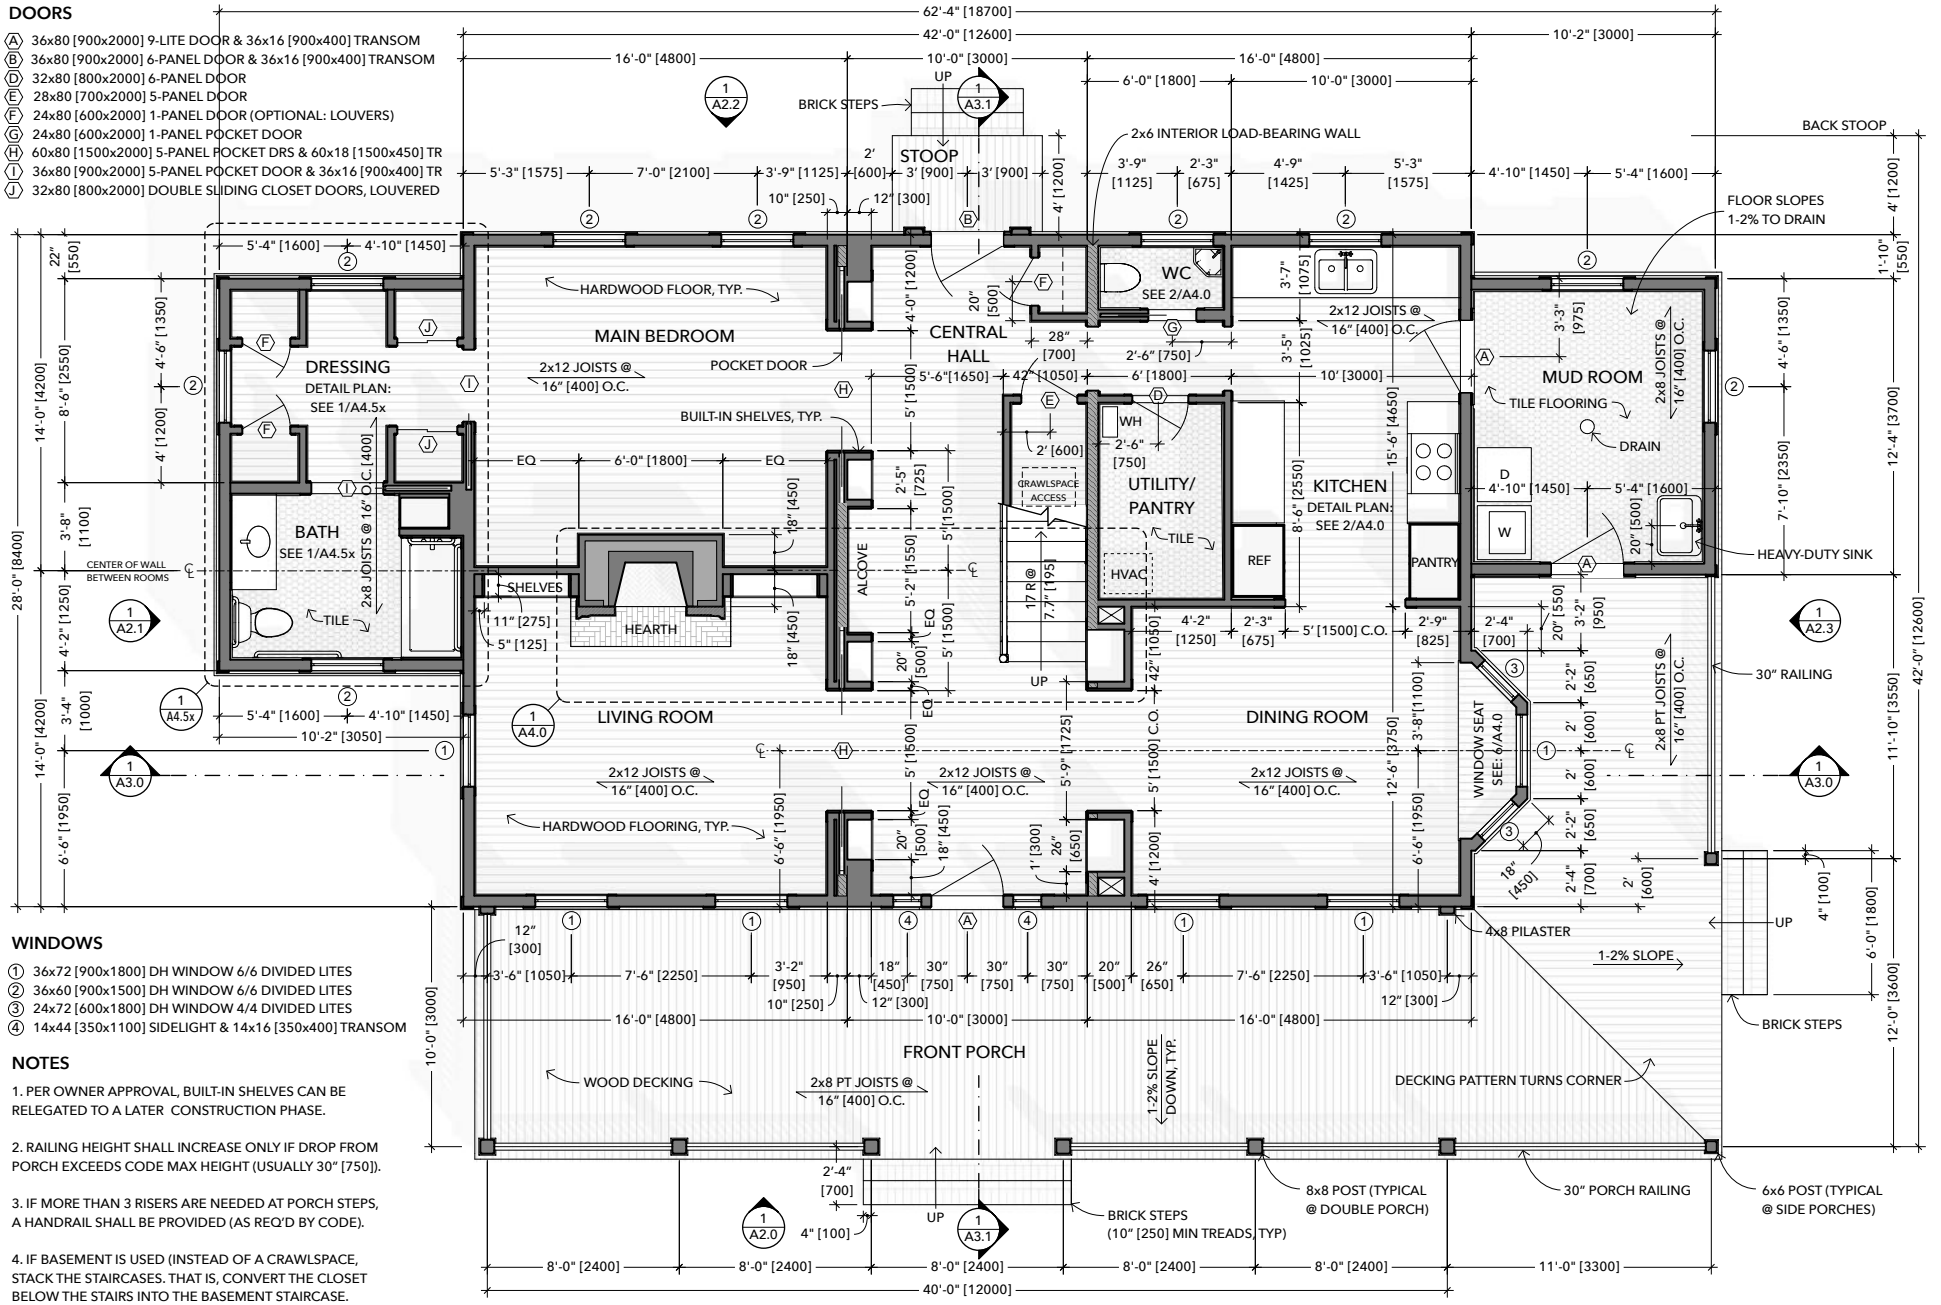

WINDOWS

- (1) 36x72 [900x1800] DH WINDOW 6/6 DIVIDED LITES
- (2) 36x60 [900x1500] DH WINDOW 6/6 DIVIDED LITES
- (3) 24x72 [600x1800] DH WINDOW 4/4 DIVIDED LITES
- (4) 14x44 [350x1100] SIDELIGHT & 14x16 [350x400] TRANSOM

NOTES

1. PER OWNER APPROVAL, BUILT-IN SHELVES CAN BE RELEGATED TO A LATER CONSTRUCTION PHASE.

2. RAILING HEIGHT SHALL INCREASE ONLY IF DROP FROM PORCH EXCEEDS CODE MAX HEIGHT (USUALLY 30" [750]).

3. IF MORE THAN 3 RISERS ARE NEEDED AT PORCH STEPS, A HANDRAIL SHALL BE PROVIDED (AS REQ'D BY CODE).

4. IF BASEMENT IS USED (INSTEAD OF A CRAWLSPACE, STACK THE STAIRCASES. THAT IS, CONVERT THE CLOSET BELOW THE STAIRS INTO THE BASEMENT STAIRCASE.

DENOTES LOAD-BEARING INTERIOR WALLS

1 1ST FLOOR PLAN

SCALE: 1/4" = 1'-0" [~1:50]

OPEN-SOURCE ARCHITECTURAL DRAWINGS

You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.

For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE


SOUTHERN FARMHOUSE

FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	**2023-02-01**	FIRST EDITION (COMPLETED BOOK)
3	**2022-11-30**	KICKSTARTER EDITION (TEST PRINTS)
2	**2022-06-21**	1ST PUBLIC RELEASE (FILES ONLINE)
1	**2022-01-01**	SCHEMATIC DESIGN PRESENTATION
+	For more project history and credits, see A0.1	

EXTENDED DESIGN: 1ST FLOOR PLAN

A1.1x

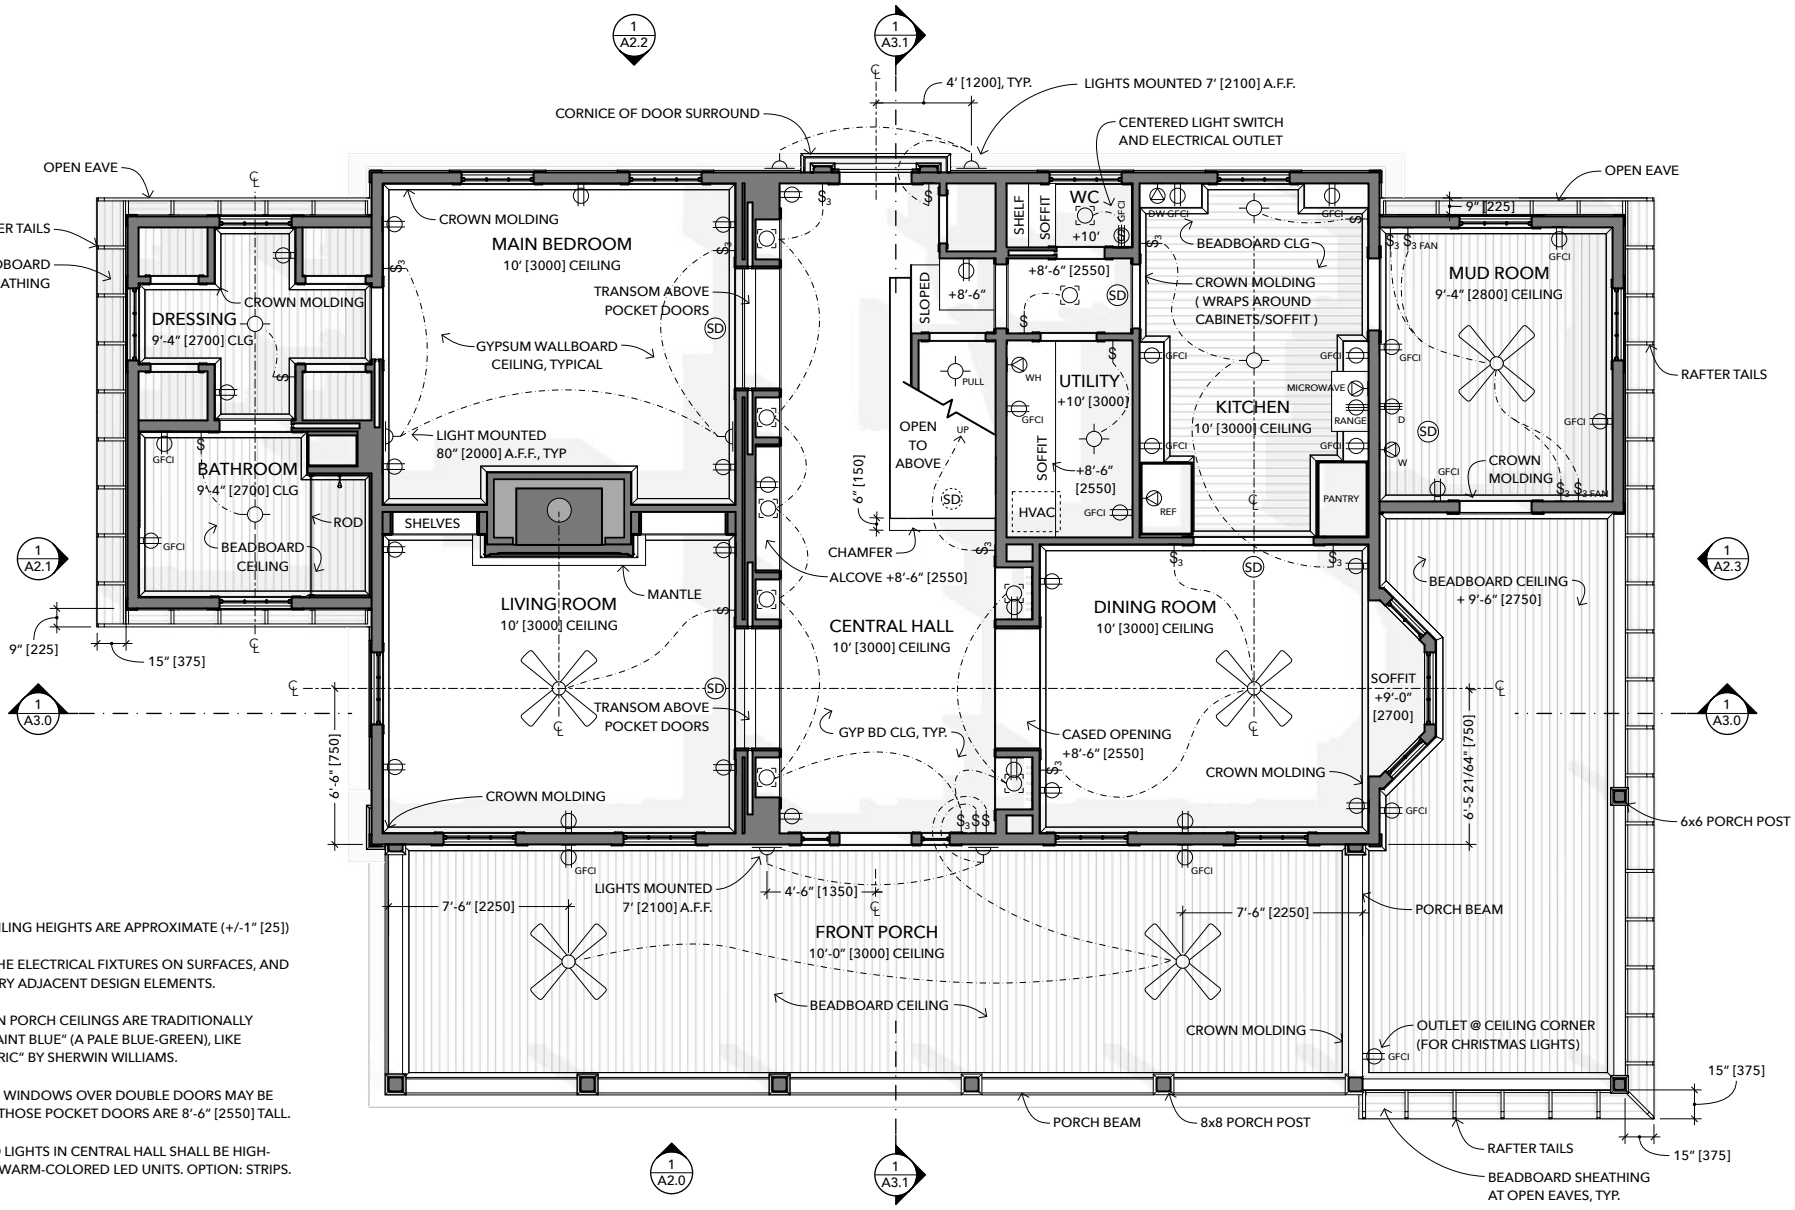

NOTES:

1. ROOM CEILING HEIGHTS ARE APPROXIMATE (+/-1″ [25])

2. CENTER THE ELECTRICAL FIXTURES ON SURFACES, AND WITH PRIMARY ADJACENT DESIGN ELEMENTS.

3. SOUTHERN PORCH CEILINGS ARE TRADITIONALLY PAINTED "HAINT BLUE" (A PALE BLUE-GREEN), LIKE "ATMOSPHERIC" BY SHERWIN WILLIAMS.

3. TRANSOM WINDOWS OVER DOUBLE DOORS MAY BE OMITTED IF THOSE POCKET DOORS ARE 8′-6″ [2550] TALL.

5. RECESSED LIGHTS IN CENTRAL HALL SHALL BE HIGH-EFFICIENCY WARM-COLORED LED UNITS. OPTION: STRIPS.

1 1ST LEVEL - REFLECTED CEILING PLAN / ELECTRICAL PLAN

SCALE: 1/4″ = 1′-0″ [~1:50]

OPEN-SOURCE ARCHITECTURAL DRAWINGS

You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.

For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE


SOUTHERN FARMHOUSE

FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	**2023-02-01**	FIRST EDITION (COMPLETED BOOK)
3	**2022-11-30**	KICKSTARTER EDITION (TEST PRINTS)
2	**2022-06-21**	1ST PUBLIC RELEASE (FILES ONLINE)
1	**2022-01-01**	SCHEMATIC DESIGN PRESENTATION
+	For more project history and credits, see A0.1	


EXTENDED DESIGN: 1ST RCP/ELECTRICAL

A1.4x

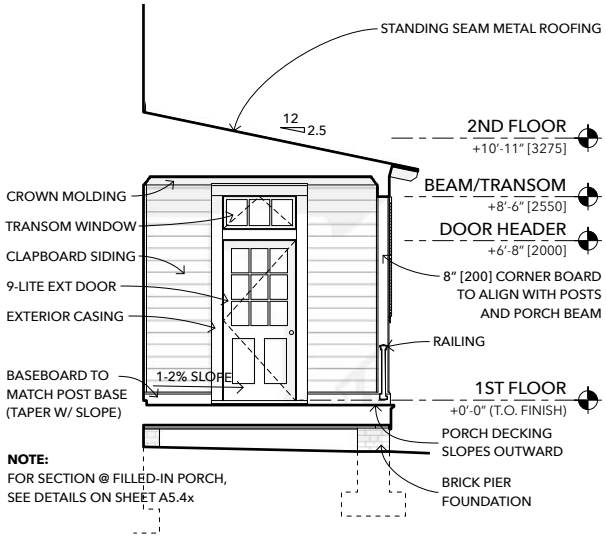


1 SOUTH ELEVATION @ MUD ROOM EXTENSION

SCALE: 1/4" = 1'-0" [~1:50]

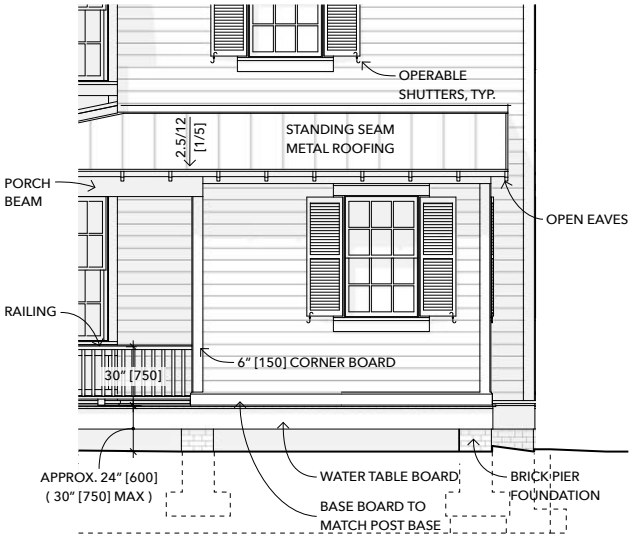


2 EAST ELEVATION @ MUD ROOM EXTENSION

SCALE: 1/4" = 1'-0" [~1:50]

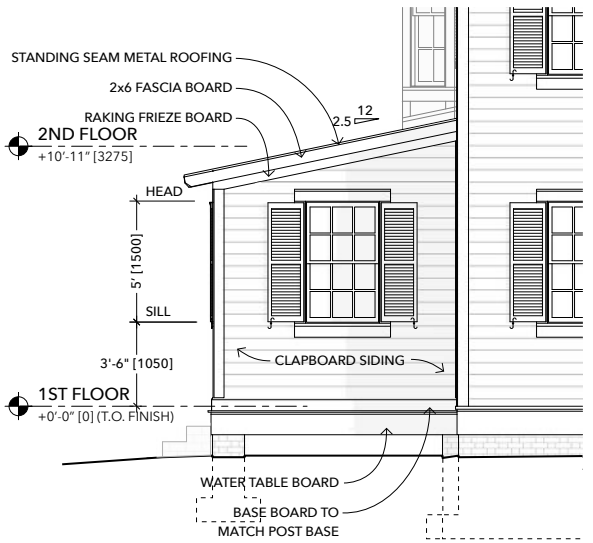


3 NORTH ELEVATION @ MUD ROOM EXTENSION

SCALE: 1/4" = 1'-0" [~1:50]

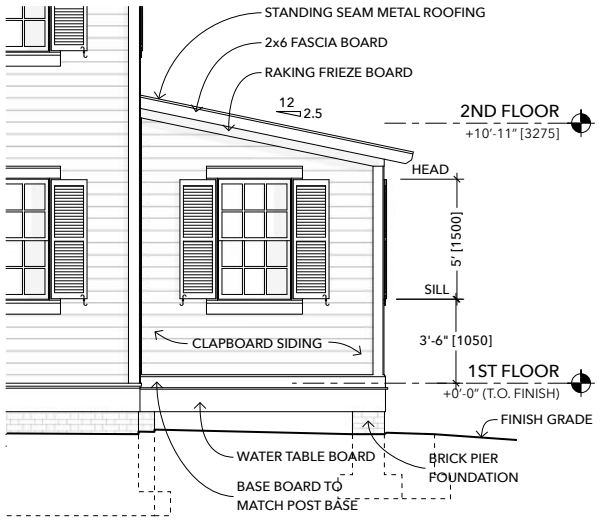


4 NORTH ELEVATION @ BEDROOM SUITE EXTENSION

SCALE: 1/4" = 1'-0" [~1:50]

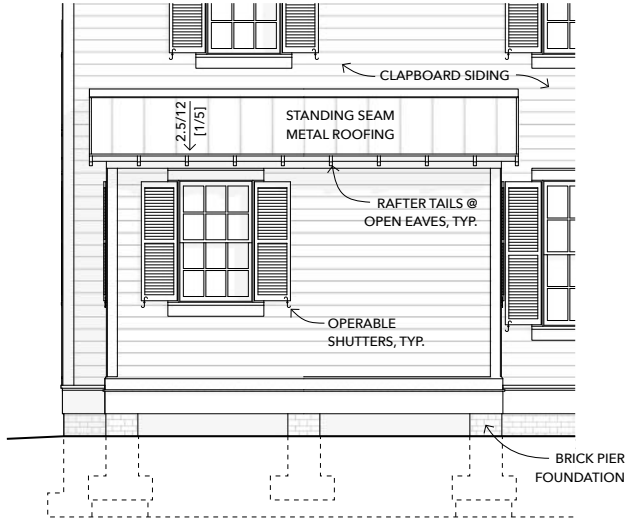

5 WEST ELEVATION @ BEDROOM SUITE EXTENSION

SCALE: 1/4" = 1'-0" [~1:50]

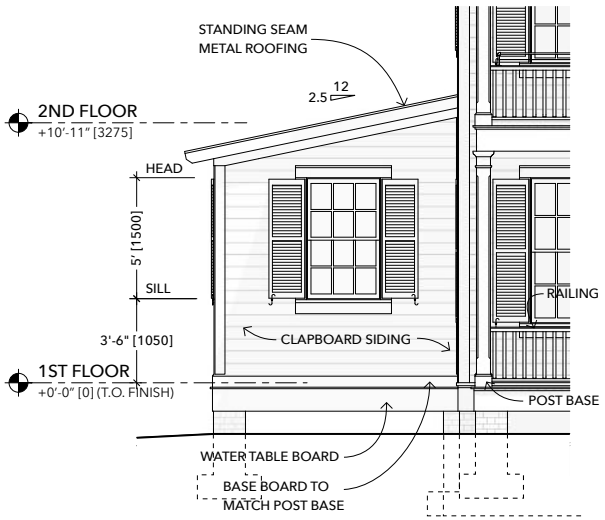

6 SOUTH ELEVATION @ BEDROOM SUITE EXTENSION

SCALE: 1/4" = 1'-0" [~1:50]

OPEN-SOURCE ARCHITECTURAL DRAWINGS
You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.
For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE

SOUTHERN FARMHOUSE

FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	**2023-02-01**	FIRST EDITION (COMPLETED BOOK)
3	**2022-11-30**	KICKSTARTER EDITION (TEST PRINTS)
2	**2022-06-21**	1ST PUBLIC RELEASE (FILES ONLINE)
1	**2022-01-01**	SCHEMATIC DESIGN PRESENTATION

+ For more project history and credits, see A0.1

EXTENDED DESIGN: DETAIL ELEVATIONS

A2.4x


FINISHES

- F-52 BATH COUNTERTOP
- F-62 BATH FLOOR TILE
- F-64 SHOWER WALL TILE
- F-68 BASEBOARD MOLDING
- F-72 INT OPENING CASING
- F-74 BEADBOARD
- F-76 WAINSCOT CAP

FIXTURES

NOTE: MOST OF THESE ITEMS ARE NOT IN SCHEDULE 2/A6.0

- X-25 30" [750] ADA VANITY W/ 8" [200] SIDE DRAWERS
- X-91 ADA GRAB BAR (LENGTH VARIES)
- X-19 15x24 [375x600] CABINETS (SEE HEIGHTS ON 2/A4.5x)
- X-20 TOILET
- X-27 30x60 [750x1500] BATHTUB

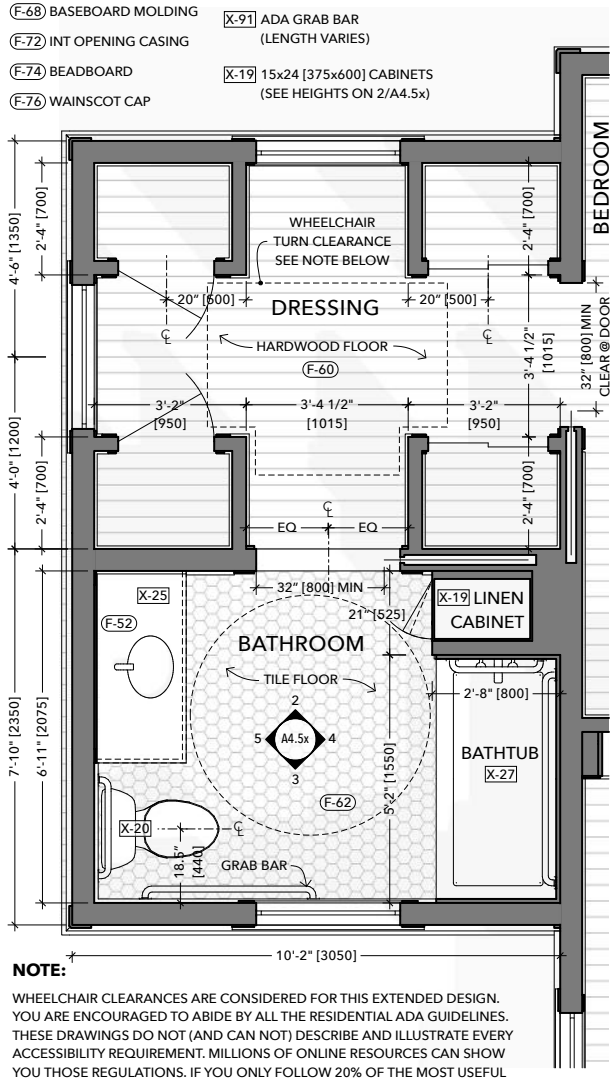


NOTE:

WHEELCHAIR CLEARANCES ARE CONSIDERED FOR THIS EXTENDED DESIGN. YOU ARE ENCOURAGED TO ABIDE BY ALL THE RESIDENTIAL ADA GUIDELINES. THESE DRAWINGS DO NOT (AND CAN NOT) DESCRIBE AND ILLUSTRATE EVERY ACCESSIBILITY REQUIREMENT. MILLIONS OF ONLINE RESOURCES CAN SHOW YOU THOSE REGULATIONS. IF YOU ONLY FOLLOW 20% OF THE MOST USEFUL ADA GUIDELINES, THAT WOULD PROVIDE 80% OF THE BENEFITS. BECAUSE OF DIMINISHING RETURNS, PERFECTION IS USUALLY PROHIBITIVELY EXPENSIVE. SO EVEN IF NOT REQUIRED FOR YOUR CURRENT PURPOSES, FOLLOWING A FEW IMPORTANT ACCESSIBILITY GUIDELINES COULD BE IMMEASURABLY BENEFICIAL.


1 1ST-FLOOR ENSUITE BATHROOM / DRESSING - PLAN

SCALE: 1/2" = 1'-0" [~1:25]

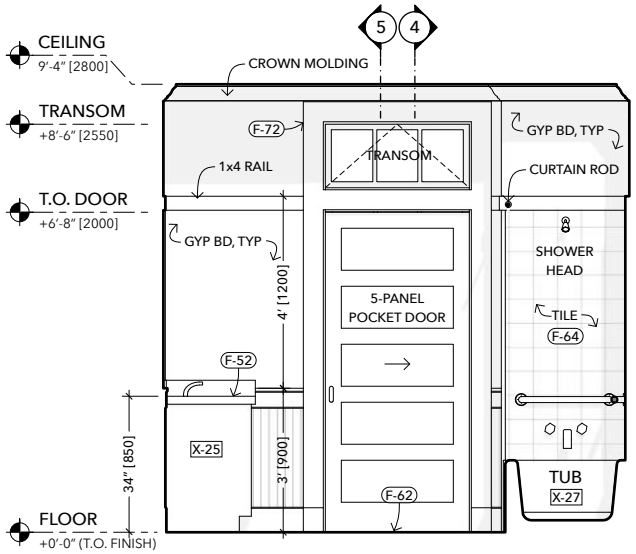


2 BATHROOM - INTERIOR ELEVATION - NORTH

SCALE: 1/2" = 1'-0" [~1:25]

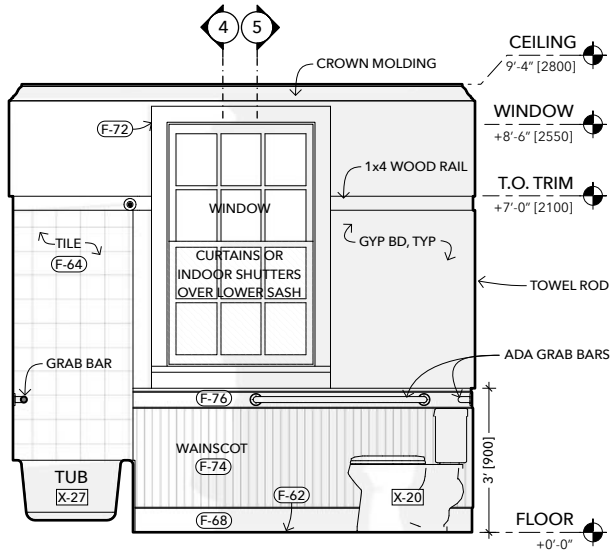


3 BATHROOM - INTERIOR ELEVATION - SOUTH

SCALE: 1/2" = 1'-0" [~1:25]

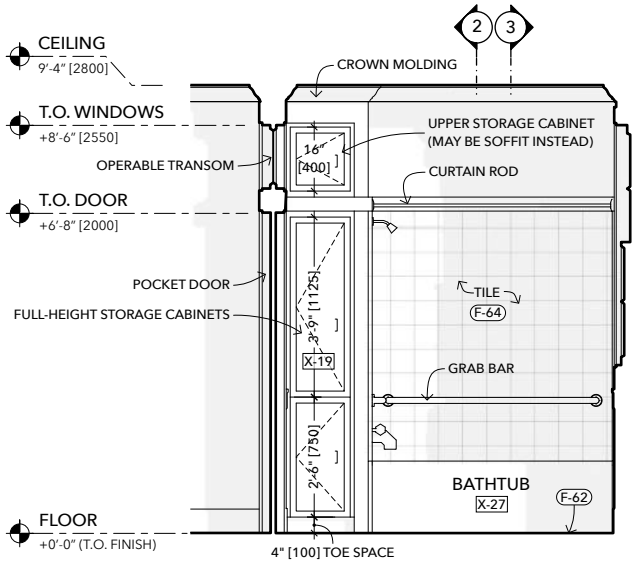

4 BATHROOM - INTERIOR ELEVATION - EAST

SCALE: 1/2" = 1'-0" [~1:25]

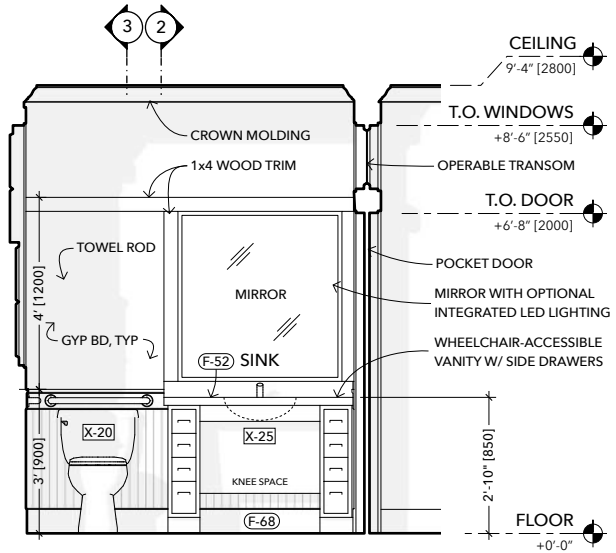

5 BATHROOM - INTERIOR ELEVATION - WEST

SCALE: 1/2" = 1'-0" [~1:25]

OPEN-SOURCE ARCHITECTURAL DRAWINGS

You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.

For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE

SOUTHERN FARMHOUSE


FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	2023-02-01	FIRST EDITION (COMPLETED BOOK)
3	2022-11-30	KICKSTARTER EDITION (TEST PRINTS)
2	2022-06-21	1ST PUBLIC RELEASE (FILES ONLINE)
1	2022-01-01	SCHEMATIC DESIGN PRESENTATION

\+ For more project history and credits, see A0.1

EXTENDED DESIGN: FLOOR 1 BATHROOM

A4.5x

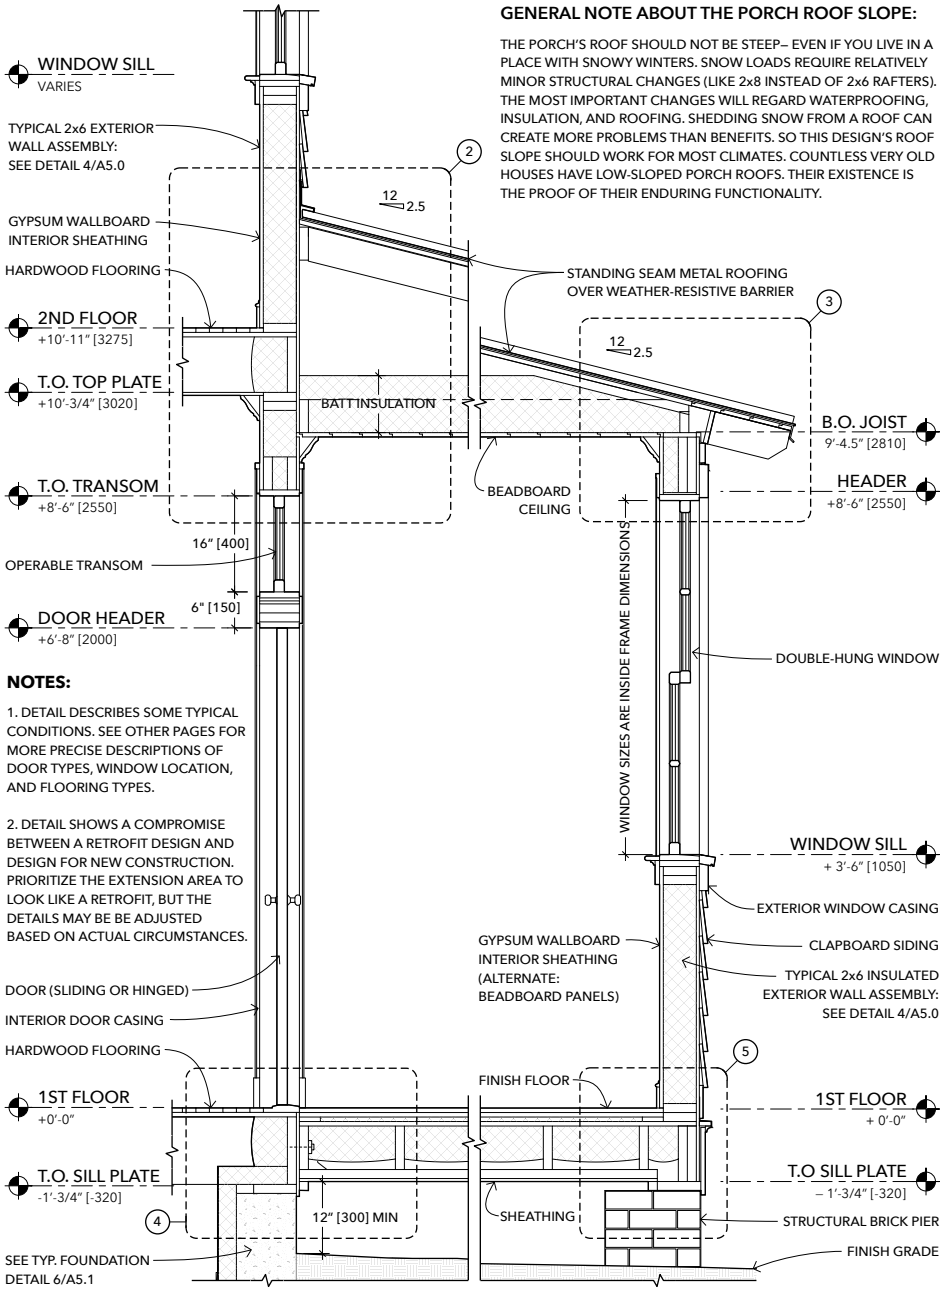

GENERAL NOTE ABOUT THE PORCH ROOF SLOPE:

THE PORCH'S ROOF SHOULD NOT BE STEEP– EVEN IF YOU LIVE IN A PLACE WITH SNOWY WINTERS. SNOW LOADS REQUIRE RELATIVELY MINOR STRUCTURAL CHANGES (LIKE 2x8 INSTEAD OF 2x6 RAFTERS). THE MOST IMPORTANT CHANGES WILL REGARD WATERPROOFING, INSULATION, AND ROOFING. SHEDDING SNOW FROM A ROOF CAN CREATE MORE PROBLEMS THAN BENEFITS. SO THIS DESIGN'S ROOF SLOPE SHOULD WORK FOR MOST CLIMATES. COUNTLESS VERY OLD HOUSES HAVE LOW-SLOPED PORCH ROOFS. THEIR EXISTENCE IS THE PROOF OF THEIR ENDURING FUNCTIONALITY.


NOTES:

1. DETAIL DESCRIBES SOME TYPICAL CONDITIONS. SEE OTHER PAGES FOR MORE PRECISE DESCRIPTIONS OF DOOR TYPES, WINDOW LOCATION, AND FLOORING TYPES.

2. DETAIL SHOWS A COMPROMISE BETWEEN A RETROFIT DESIGN AND DESIGN FOR NEW CONSTRUCTION. PRIORITIZE THE EXTENSION AREA TO LOOK LIKE A RETROFIT, BUT THE DETAILS MAY BE BE ADJUSTED BASED ON ACTUAL CIRCUMSTANCES.


1 FILLED-IN PORCH SECTION

SCALE: 3/4" = 1'-0" [1:16]

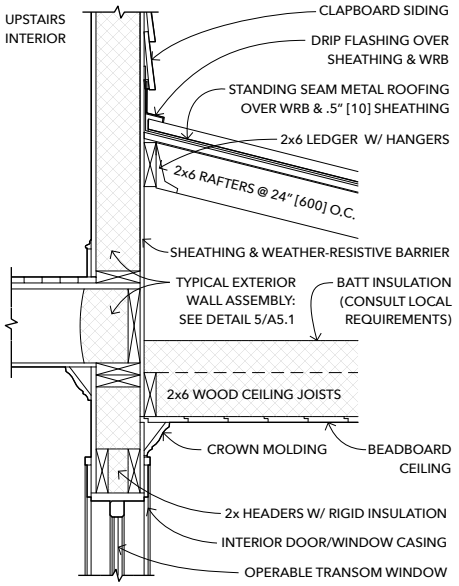

2 FILLED PORCH ROOF AT WALL

SCALE: 1" = 1'-0" [1:12]

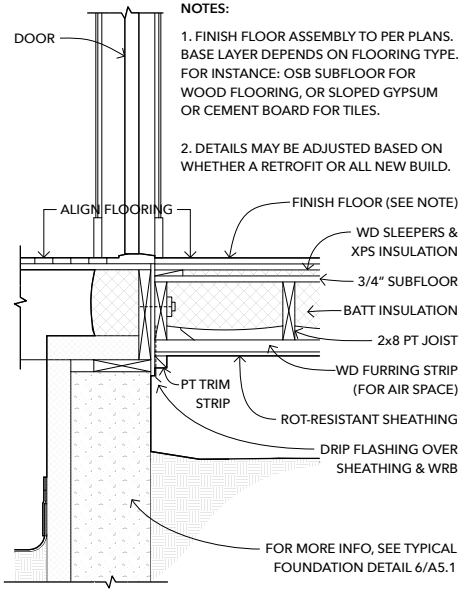

NOTES:

1. FINISH FLOOR ASSEMBLY TO PER PLANS. BASE LAYER DEPENDS ON FLOORING TYPE. FOR INSTANCE: OSB SUBFLOOR FOR WOOD FLOORING, OR SLOPED GYPSUM OR CEMENT BOARD FOR TILES.

2. DETAILS MAY BE ADJUSTED BASED ON WHETHER A RETROFIT OR ALL NEW BUILD.


4 FILLED PORCH FLOOR TRANSITION

SCALE: 1" = 1'-0" [1:12]

NOTES:


1. TO PREVENT PINCHING INSULATION AT ROOF EAVE, SEPARATE CEILING JOIST ASSEMBLY CAN BE CONSTRUCTED 6" [150] LOWER. THE CROWN MOLDINGS WILL THEN CONFLICT WITH WINDOW TRIM.

2. THESE OPEN EAVES MIGHT NOT BE ALLOWED IN WILDFIRE ZONES. CONSULT LOCAL REGULATIONS FOR ANY SITE-BASED RESTRICTIONS.

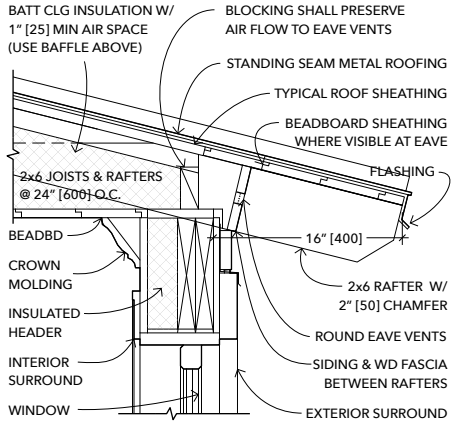

3 FILLED PORCH @ ROOF EAVE

SCALE: 1-1/2" = 1'-0" [1:8]

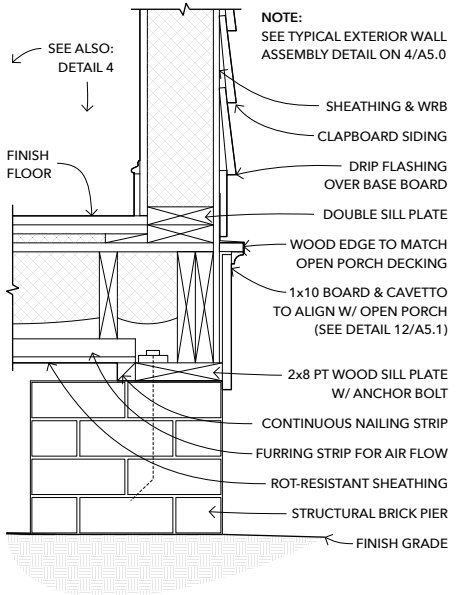

NOTE:
SEE TYPICAL EXTERIOR WALL ASSEMBLY DETAIL ON 4/A5.0

5 FILLED PORCH @ PIER FOUNDATION

SCALE: 1-1/2" = 1'-0" [1:8]

OPEN-SOURCE ARCHITECTURAL DRAWINGS
You are encouraged to share, copy, and customize this work. These drawings are generously made available under a Creative Commons Attribution Share-Alike License. Some rights reserved.
For more info, see **www.creativecommons.org/licenses/by-sa/4.0**.

A DESIGN BY JAY OSBORNE

SOUTHERN FARMHOUSE

FREE FILES AVAILABLE AT FREEFARMHOUSE.COM

4	**2023-02-01**	FIRST EDITION (COMPLETED BOOK)
3	**2022-11-30**	KICKSTARTER EDITION (TEST PRINTS)
2	**2022-06-21**	1ST PUBLIC RELEASE (FILES ONLINE)
1	**2022-01-01**	SCHEMATIC DESIGN PRESENTATION
+	For more project history and credits, see A0.1	

EXTENDED DESIGN: DETAILS

A5.4x

WWW.FREEFARMHOUSE.COM

SOUTHERN FARMHOUSE

A DESIGN BY JAY OSBORNE

